

Inline splicing connector with lever; for all conductor types; max. 4 mm²; 2-conductor; transparent housing; Transparent cover; Surrounding air temperature: max 85°C (T85); 4,00 mm²; transparent



www.wago.com/221-2411

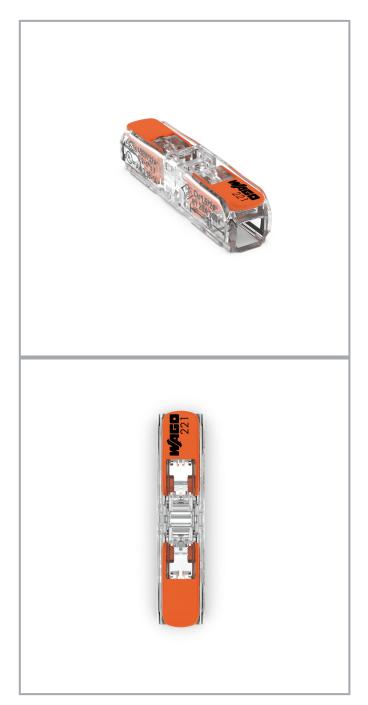



 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO Kontakttechnik GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/221-2411



#### Item description

This connector is suitable for worldwide installations.

#### Data

### **Electrical data**

### Ratings per IEC/EN

Ratings per	EN 60664	
Nominal voltage (II/2)	450 V	
Rated surge voltage (II/2)	4 kV	
Rated current	32 A	
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2	

### Ratings per UL

Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	20 A

#### Connection data

Connection technology	CAGE CLAMP®
Actuation type	Lever
Connectable conductor materials	Copper
Solid conductor	0.2 4 mm² / 20 14 AWG
Stranded conductor	0.2 2.5 mm² / 18 14 AWG
Fine-stranded conductor	0.2 4 mm² / 18 14 AWG
Strip length	11 mm / 0.43 inch
Total number of connection points	2

# Physical data

Width	8.1 mm / 0.319 inch
Height	8.9 mm / 0.35 inch
Depth	35.5 mm / 1.398 inch

## Material data

Color	transparent
Flammability class per UL94	V2

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/221-2411



Color of actuator	orange
Weight	2.4 g

#### Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4055144049404
Customs tariff number	85369010000

#### Optional accessories

		1	:
ass	em	ını	เทต

assembling		
	Item no.: 209-120	
	Mounting foot; can be snapped on terminal blocks with snap-in mounting foot; for mounting on relay-modules; 6.4 mm wide; gray	www.wago.com/209-120
	Item no.: 209-123	
-	Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide; gray	www.wago.com/209-123
	Item no.: 221-2501	
`	Mounting carrier with strain relief; 1-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2501
	Item no.: 221-2502	
	Mounting carrier with strain relief; 2-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2502
	Item no.: 221-2503	
•	Mounting carrier with strain relief; 3-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2503
	Item no.: 221-2504	
•	Mounting carrier with strain relief; 4-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2504
	Item no.: 221-2505	
•	Mounting carrier with strain relief; 5-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2505
	Item no.: 221-2511	
	Mounting carrier with strain relief; 1-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2511
	Item no.: 221-2512	
	Mounting carrier with strain relief; 2-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2512
	Item no.: 221-2513	
•	Mounting carrier with strain relief; 3-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2513
	Item no.: 221-2514	
•	Mounting carrier with strain relief; 4-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2514

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/221-2411



*	Item no.: 221-2515  Mounting carrier with strain relief; 5-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2515
	Item no.: 221-2521  Mounting carrier; 1-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2521
•	Item no.: 221-2522  Mounting carrier; 2-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2522
•	Item no.: 221-2523  Mounting carrier; 3-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2523
*	Item no.: 221-2524  Mounting carrier; 4-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2524
•	Item no.: 221-2525  Mounting carrier; 5-way; for inline splicing connector with lever; for screw mounting; gray	www.wago.com/221-2525
`	Item no.: 221-2531  Mounting carrier; 1-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2531
•	Item no.: 221-2532  Mounting carrier; 2-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2532
*	Item no.: 221-2533  Mounting carrier; 3-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2533
*	Item no.: 221-2534  Mounting carrier; 4-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2534
*	Item no.: 221-2535  Mounting carrier; 5-way; for inline splicing connector with lever; with snap-in mounting foot; gray	www.wago.com/221-2535

# Downloads

#### Documentation

# Additional Information

Technical explanations 03.04.2019. pdf Download 2.2 MB

#### **Environmental Product Compliance**

#### Compliance Search

**Environmental Product Compliance 221-2411** 

Inline splicing connector with lever; for all conductor types; max. 4 mm $^2$ ; 2-conductor; transparent housing; Transparent cover; Surrounding air temperature: max 85°C

(T85); 4,00 mm<sup>2</sup>; transparent

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

URL

Download

www.wago.com/221-2411



**Installation Notes** 

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO Kontakttechnik GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Terminals category:

Click to view products by Wago manufacturer:

Other Similar products are found below:

00-054007-01074-6 00-054007-70206-1 00-054007-70210-8 00-054007-70217-7 00-054007-70226-9 00-054007-70228-3 00-054007-70248-1 00-054007-70256-6 00-054007-70301-3 00-054007-70316-7 00-054007-49560-4 00-054007-70209-2 00-054007-70225-2 00-054007-70228-7 00-054007-70231-3 00-054007-70241-2 00-054007-70242-9 00-054007-70244-3 00-054007-70246-7 00-054007-70263-4 00-054007-70288-7 00-054007-70290-0 00-054007-70300-6 00-054007-70304-4 01-2065-1-0216 01-2900-1-04412 00581P0075 600TS-10 60205-1 604200-1 605601-1 60598-1-CUT-TAPE 60617-1-C 61314-6-C 61810-3 61-S 626-0194 62-NBM-A 62-SP 63-S 640179-1 M55155/059103 M55155/079C01 M55155/099H02 M55155/109H01 M55155/109H02 M55155/12XH05 M55155/16XH02 M55155/29-5S M55155/29XJ08