



PS No.	PS-010-050
Version	00
Date	2015-5-30

继电器规格书

RELAY SPECIFICATION

品名/Product Description RD-105DM-A
零件编号/Part Number
客户名/Customer

客户批准/Customer Approval

盖章处/STAMPING AREA

发行批准 / Issued by		
PD	SM	R&D
冯旭强	余明亮	钟久洪


变更履历 / HISTORY


[illegible]

继电器规格书 Relay Specification	型号 Type	RD-105DM-A	产品编号 Part Number		PS No.: PS-010-050 Ver 00
1 <u>零件清单/PARTS LIST</u>					
No.	零件名 Part	材质 MATERIAL	型号/处理方式 TYPE/TREATMENT	UL FILE No. FLAME CLASS	
1	外壳 Case	PBT	5010GN6-30 RG301	E53664 E171666	
2	骨架 Bobbin	PBT	5010GN6-30 M8X	E53664	
3	铁芯 Core	铁 Steel	镀镍 Nickel Plated		
4	轭铁 Yoke	铁 Steel	镀镍 Nickel Plated		
5	衔铁 Armature	铁 Steel	镀镍 Nickel Plated		
6	M接点 M Contact	银合金 Ag Alloy			
7	可动接点 C Contact	银合金 Ag Alloy			
8	B端子 B Terminal	铜合金 Cu Alloy			
9	M端子 M Terminal	铜合金 Cu Alloy			
10	可动弹片 S.C.C	铜合金 Cu Alloy			
11	线圈端子 Coil Terminal	铜合金 Cu Alloy	镀锡 Solder Coated		
12	线材 Wire	聚氨脂漆包圆铜线 Polyurethane copper wire	3UEW 155(F Class)	E164502 E234867	
13	胶水 Sealing Resin	环氧树脂 Epoxy			



继电器规格书 Relay Specification		型号 Type	RD-105DM-A	产品编号 Part Number	
2. 性能/SPECIFICATIONS					PS No.: PS-010-050 Ver 00
2.1 驱动部分/COIL SPECIFICATIONS					
2.1.1 额定电压	5	VDC（在20℃时）			
Rated Coil Voltage	5	VDC at 20℃			
2.1.2 额定功率	0.36	W（在20℃时）			
Nominal Power	0.36	W at 20℃			
2.1.3 线圈电阻	69.4	Ω±10%（在20℃时）			
Coil Resistance	69.4	Ω±10%（at 20℃）			
2.1.4 额定电流	72	mA±10%（在20℃时）			
Nominal Current	72	mA±10%（at 20℃）			
2.1.5 吸合电压	3.75	VDC以下（在20℃时）			
Operate Voltage	3.75	VDC Max. at 20℃			
2.1.6 释放电压	0.25	VDC以上（在20℃时）			
Release Voltage	0.25	VDC Min. at 20℃			
2.1.7 最大连续施加电压	7.75	VDC Max. 155%额定电压			
Max Power	7.75	VDC Max. 155%of Nominal			
2.2 开关部/CONTACT SPECIFICATION					
2.2.1 开关类型	单刀常开型				
Contact Configuration	1 Form A				
2.2.2 接点规格	10	A 277VAC（阻性负载）			
Contact Rating	10	A @277VAC (Resistive)			
2.2.3 接触电阻	100	mΩ 以下，(初期值，DC 6V/1A条件下)			
Contact Resistance	100	mΩ Max. @ Initiate, DC 6V/1A			
	500	mΩ 以下，(寿命试验后，DC 6V/1A条件下)			
	500	mΩ Max. @ After Life, DC 6V/1A			
2.2.4 吸合时间	20	ms 以下（额定电压下）			
Operate Time	20	ms Max. @ Rated Voltage			
2.2.5 释放时间	10	ms 以下（施加额定电压后断开时）			
Release Time	10	ms Max. @ Rated Voltage			
2.2.6 最大动作频率	300	次/分（无负载）			
Max. Switching Rate	300	ops./min. (no load).			
	6	次/分（额定负载）			
	6	ops./min. (Rated load)			

继电器规格书 Relay Specification		型号 Type	RD-105DM-A		产品编号 Part Number	
2.3 特性/GENERAL SPECIFICATION						
2.3.1 绝缘电阻 Insulation Resistance		1000 MΩ以上 (500VDC) 1000 MΩ Min@500VDC				
2.3.2 介质耐压 Dielectric Strength		750 VAC/分钟(接点间) 1500 VAC/分钟(线圈/接点间) 750 VAC@50/60Hz 1 min.(Between Open Contacts) 1500 VAC@50/60Hz 1 min.(Between Coil and Contacts)				
2.3.3 电气寿命 Electrical Life		1X10 ⁵ 次以上 (额定阻性负载条件下) 1X10 ⁵ Cycle Min. @ Rate Load				
2.3.4 机械寿命 Mechanical Life		1X10 ⁶ 次以上 (无负载) 1X10 ⁶ Cycle Min. @no load				
2.3.5 使用环境温度 Temperature		-40~105 ℃ (无凝结时) -40~105 ℃ @no condensation				
2.3.6 使用环境湿度 Humidity		20~85% RH (无凝结时) 20~85% RH @no condensation				
2.3.7 抗振动 Vibration		耐久 Mechanical 误动作 Operational	10~55 Hz, 双振幅 1.5mm 10 to 55 Hz, 1.5mm double amplitude 10~55 Hz, 双振幅1.5mm 10 to 55 Hz, 1.5mm double amplitude			
2.3.8 抗冲击 Shock		耐久 Mechanical 误动作 Operational	980 m/s ² Min (约100G) 980 m/s ² Min (100G approximately) 98 m/s ² Min (约10G) 98 m/s ² Min (10G approximately)			
2.3.9 重量 Weight		9 克 9 g				
2.3.10 焊锡条件 Solder ability		5s @ 260℃ (波峰焊) 5s @ 260℃ (wave soldering)				
2.4 端子性能/TERMINAL CHARACTERSITICS						
2.4.1 端子强度 Terminals strength		5牛/10秒, 任意方向静态压力, 无异常, 但端子弯曲可以 5N 10s, Thereshall be no abnormalities. (The curving of the terminal shall be acceptable)				
2.4.2 可焊性 Terminal solderbility		260±5℃ 5s, 端子头部3mm部分90%以上的面积有锡覆盖 (无铅焊锡) 260±5℃ 5s, In Case of lead lead free solder, 90% of the dipped portion shall be solderd.				
2.4.3 耐热性 Soldring Heat Resistance		10s 260℃或3s 350℃,端子头部3mm浸入锡中, 无异常发生 10s @ 260℃ or 3s @ 350℃ ,There shall be no abnormalities. (wave soldering)				

继电器规格书 Relay Specification	型号 Type	RD-105DM-A	产品编号 Part Number	PS No.: PS-010-050 Ver 00
2.5 安全规格/SAFETY REQUIREMENTS				
2.5.1 UL规格认定（UL & C-UL） UL（UL & C-UL）		档案号: File No.:	E345228 	
2.5.2 CQC标志认证 CQC		证书编号: Certificate No.:	CQC12002082387 	
2.5.3 TUV规格认定 TUV		证书号 Certificate No.	R 50244311 	
3. 捺印图/Mark Layout				
			注: 仅供参考. For reference only.	
结束/<END>				

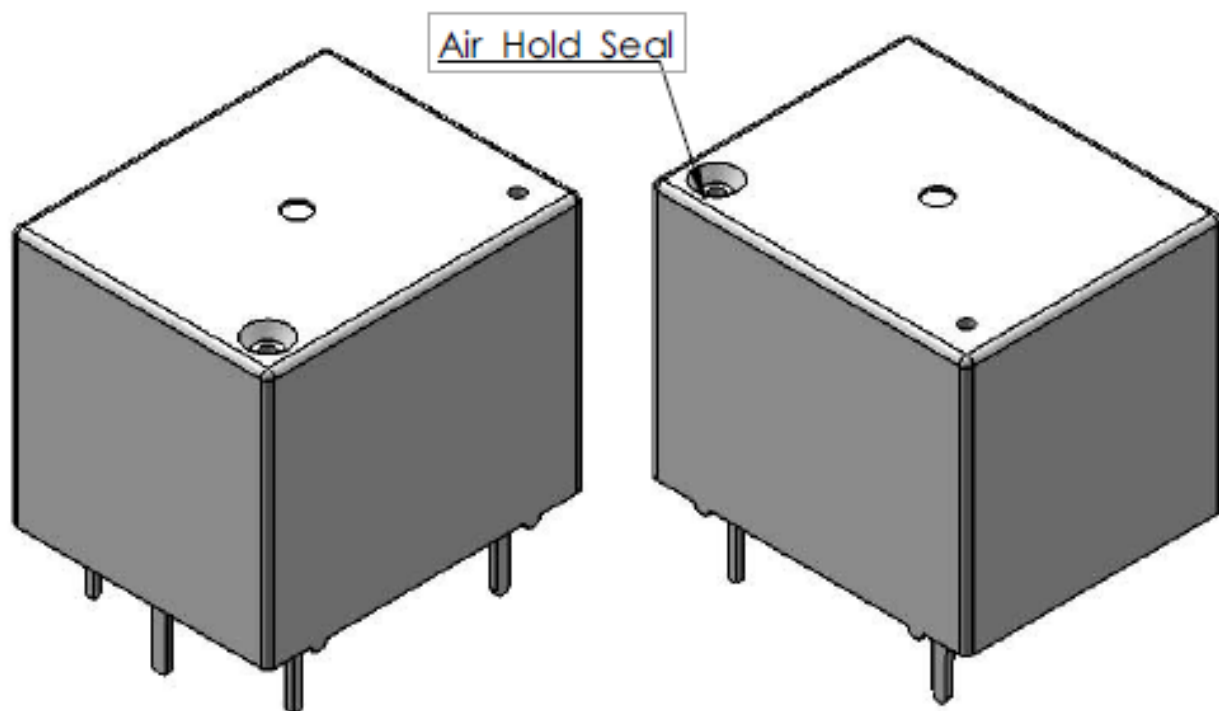

3:1

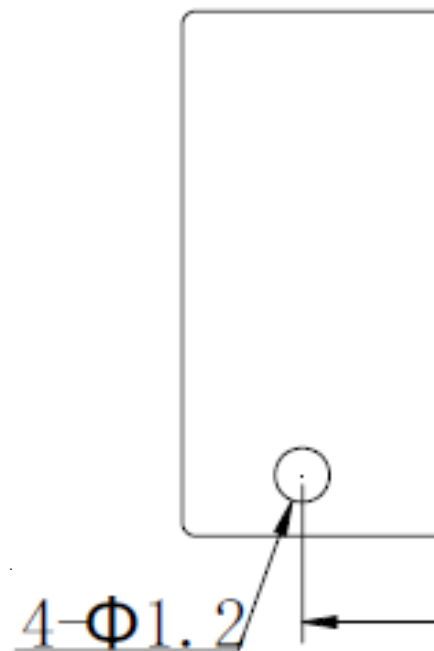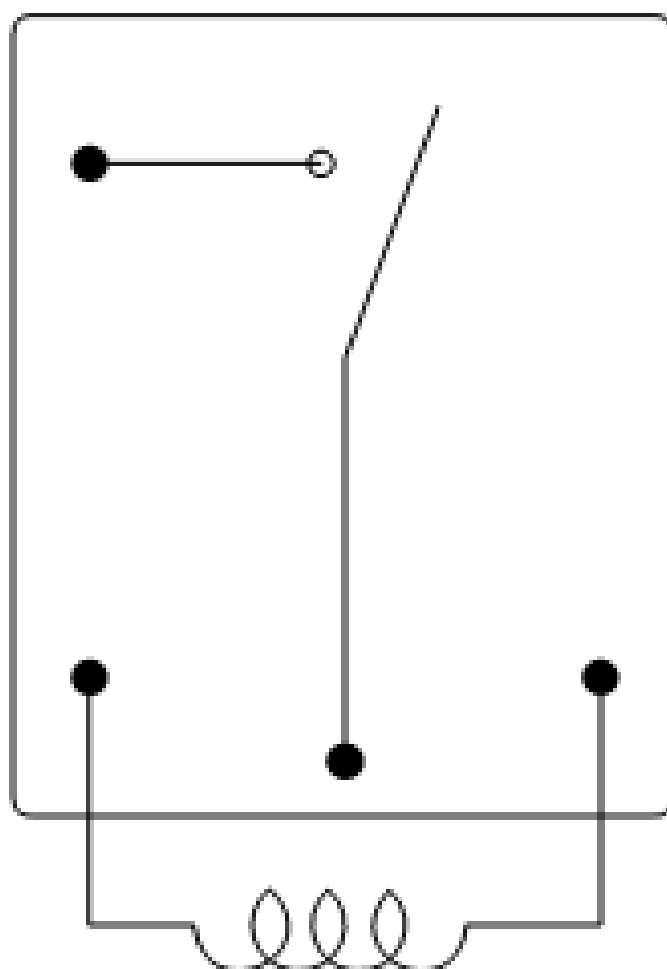

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) ***category:***

Click to view products by [Wangrong](#) ***manufacturer:***

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)