

RCLS3L024W**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Similar to illustration

Individual relays for TERMSERIES

- Electromechanical relays
- Different contact materials

General ordering data

Version	TERMSERIES, Relay, Number of contacts: 1, NO contact AgSnO, Rated control voltage: 24 V DC, Continuous current: 16 A, Plug-in connection, Test button available: No
Order No.	1984080000
Type	RCLS3L024W
GTIN (EAN)	4050118369175
Qty.	20 pc(s).

RCLS3L024W**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	15.7 mm	Depth (inches)	0.618 inch
Height	29 mm	Height (inches)	1.142 inch
Width	12.7 mm	Width (inches)	0.5 inch
Net weight	14.4 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
---------------------	----------------	-----------------------	----------------

Rated data UL

Certificate No. (cURus)	E302101
-------------------------	---------

Control side

Rated control voltage	24 V DC	Rated current DC	17.3 mA
Power rating	420 mW	Coil resistance	1440 Ω ± 10 %
Status indicator	No		

Load side

Rated switching voltage	250 V AC	Continuous current	16 A
Max. switching frequency at rated load	0.1 Hz	Inrush current	80 A / 20 ms
AC switching capacity (resistive), max.	4000 VA	DC switching capacity (resistive), max.	384 W @ 24 V
Switch-on delay	≤ 10 ms	Switch-off delay	≤ 4 ms
Contact type	1 NO contact (AgSnO)	Min. switching power	1 W

General data

Test button available	No	Mechanical switch position indicator	No
Colour	white		

Insulation coordination

Rated voltage	400 V	Pollution severity	3
Surge voltage category	III	Clearance and creepage distances for control side - load side	≥ 10 mm
Dielectric strength for control side - load side	5 kV _{eff} / 1min	Dielectric strength of open contact	1 kV _{eff} / 1 min
Protection degree	IP20		

Further details of approvals / standards

Certificate No. (cURus)	E302101
-------------------------	---------

Connection data

Wire connection method	Plug-in connection	Pitch in mm (P)	5 mm
------------------------	--------------------	-----------------	------

RCLS3L024W

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Classifications

ETIM 6.0	EC001437	ETIM 7.0	EC001437
ETIM 8.0	EC001437	ETIM 9.0	EC001437
ETIM 10.0	EC001437	ECLASS 9.0	27-37-16-01
ECLASS 9.1	27-37-16-01	ECLASS 10.0	27-37-16-01
ECLASS 11.0	27-37-16-01	ECLASS 12.0	27-37-16-01
ECLASS 13.0	27-37-16-01	ECLASS 14.0	27-37-16-01
ECLASS 15.0	27-37-16-01		

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E302101

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Downloads

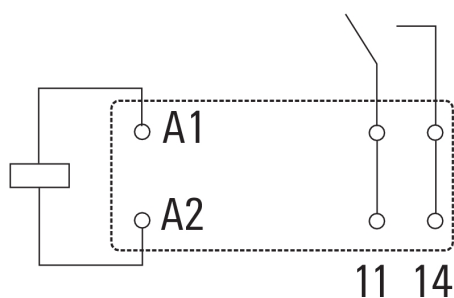
Engineering Data	CAD data – STEP
User Documentation	FL_TERMSERIES_RCL1NOInrush_LOAD_GUIDE
Catalogues	Catalogues in PDF-format

RCLS3L024W**Weidmüller Interface GmbH & Co. KG**

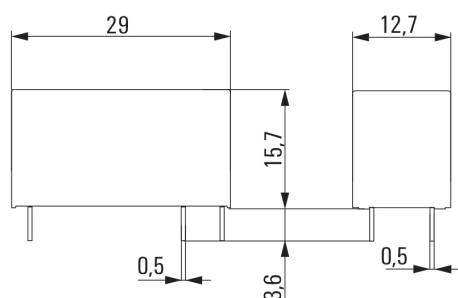
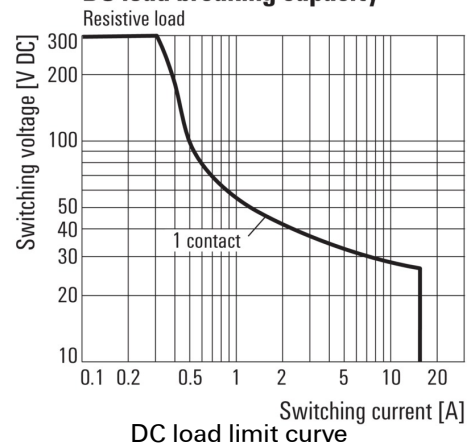
Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Drawings****Wiring diagram**

View of Pins from below

Dimensional drawing**Graph****DC load breaking capacity**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Relays](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[6-1617801-8](#) [CX-3958](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-210-113](#) [FCA-325-159](#) [1-1833005-4](#) [H-16/S1](#) [H-8C](#) [ACC530U20](#) [HF3FF/024-1ZST\(257\)](#) [HFE10-1/12-HT-L2\(257\)](#) [EB3L-S10SAN](#) [1618095-3](#) [1618104-9](#) [1618279-1](#) [BHR124Y](#) [N417](#) [2-1618398-1](#) [88DHSX-6](#)
[SF5201F02](#) [301-17SX](#) [1618105-2](#) [1618276-6](#) [1655HS-1C-24VDC](#) [A837D](#) [A862B1](#) [ACC730-8025B](#) [SZ-T13](#) [2-1618002-9](#) [2-1618273-3](#)
[CGE40-2P-20AN](#) [HFW12111S02](#) [RF170Z-5](#) [401-45X](#) [4-1618248-5](#) [42RO-500S-SIL](#) [AVR869](#) [MDR-4088](#) [B466B](#) [MH-17](#) [BHR349](#) [3-1618060-1](#) [3-1618248-9](#) [JQ1AE-5V](#) [D7T](#) [42RO-50G-SIL](#) [DL-HANDLE](#) [46488](#) [RP9809-G1](#)