

**CABTITE FR 24/10 BK SET****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Similar to illustration**

The frame, fabricated from a single piece, is quick and easy to assemble and consists of dimensionally stable, fibre-glass reinforced plastic. The captive foamed seal guarantees effective IP66 sealing in accordance with DIN EN 60529, even on painted and rough surfaces.

**General ordering data**

|            |                                                                                                                                                         |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | Frame, Cabtite (cable entry system), Polyamide, glass fibre-reinforced, Deep black, Height: 70 mm, Width: 153 mm, Depth: 19.6 mm, -40 °C...120 °C, IP66 |
| Order No.  | <a href="#">2583720000</a>                                                                                                                              |
| Type       | CABTITE FR 24/10 BK SET                                                                                                                                 |
| GTIN (EAN) | 4050118617252                                                                                                                                           |
| Qty.       | 1 pc(s).                                                                                                                                                |

Creation date September 18, 2022 12:37:09 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

**CABTITE FR 24/10 BK SET****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|                             |            |                            |            |
|-----------------------------|------------|----------------------------|------------|
| Depth                       | 19.6 mm    | Depth (inches)             | 0.772 inch |
| Height                      | 70 mm      | Height (inches)            | 2.756 inch |
| Height of lowest version    | 19.6 mm    | Width                      | 153 mm     |
| Width (inches)              | 6.024 inch | Diameter                   | 5.5 mm     |
| Mounting dimension - height | 130 mm     | Mounting dimension - width | 32 mm      |
| Net weight                  | 110 g      |                            |            |

**Temperatures**

|                       |                 |
|-----------------------|-----------------|
| Operating temperature | -40 °C...120 °C |
|-----------------------|-----------------|

**General information**

|                   |                                                                                                                                            |                           |                                   |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------------------|
| Halogen           | No                                                                                                                                         | Material                  | Polyamide, glass fibre-reinforced |
| Opening length    | 113.5 mm                                                                                                                                   | Opening width             | 46 mm                             |
| Protection degree | IP66                                                                                                                                       | Sealing                   | TPE                               |
| Sealing element   | 2 large sealing elements and 4 small sealing elements or 1 large sealing element and 6 small sealing elements or 10 small sealing elements | Silicone                  |                                   |
| Tightening torque | 3 Nm                                                                                                                                       | UL 94 flammability rating | No<br>V-0                         |

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002624    | ETIM 7.0    | EC002624    |
| ETIM 8.0    | EC002624    | ECLASS 9.0  | 27-18-28-15 |
| ECLASS 9.1  | 27-18-92-65 | ECLASS 10.0 | 27-18-28-15 |
| ECLASS 11.0 | 27-18-28-15 | ECLASS 12.0 | 27-18-28-15 |

**Approvals**

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Downloads**




|                    |                                                   |
|--------------------|---------------------------------------------------|
| Engineering Data   | <a href="#">CAD data – STEP</a>                   |
| Engineering Data   | <a href="#">EPLAN</a>                             |
| User Documentation | <a href="#">Cabtite Installation Instructions</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>          |

**CABTITE FR 24/10 BK SET**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

Drawings

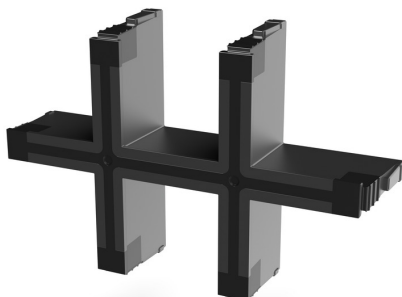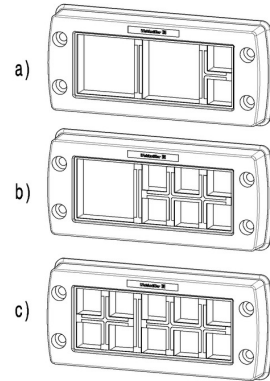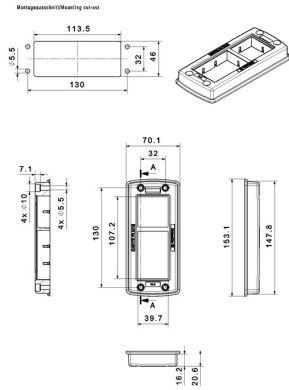

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Mounting & Accessories](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[8945](#) [8950](#) [8961](#) [582603-1](#) [009333-000](#) [CXA-0069](#) [D-150-0175CS2902](#) [70.060.1628.0](#) [727844N003](#) [770-1004](#) [770-1102](#) [770-1204](#) [770-1205-10](#) [770-1301-10](#) [770-1306](#) [770-1422](#) [770-1602](#) [770-1603](#) [770-1604](#) [770-1607](#) [790-1002](#) [809090N001](#) [843188-000](#) [8666](#) [PVC10512-BLACK-500](#) [PVC1056-BLACK-500](#) [DB-11](#) [1301800416](#) [1302030548](#) [1302264450](#) [1300830184](#) [1300830729](#) [1300900039](#) [1301580036](#) [1301850553](#) [1301860900](#) [1301860939](#) [1302000074](#) [1302261315](#) [1302264431](#) [APA18-AK](#) [MSK-0001](#) [1-787307-1](#) [1868](#) [HP-6N](#) [202C221-13-0](#) [CA7308-000](#) [229408-1](#) [KC-201](#) [8949](#)