
Sn96%, /		Yes	Yes
CUSTOMER T	ERMINAL	RoHS	LEAD(Pb)-FREE



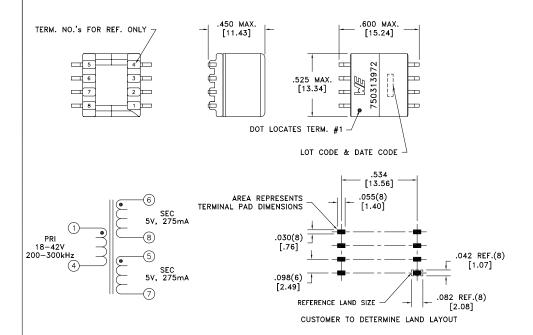

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4	@20°C	0.08 ohms max.
D.C. RESISTANCE	5-7	@20°C	0.185 ohms ±10%
D.C. RESISTANCE	6-8	@20°C	0.185 ohms ±10%
INDUCTANCE	1-4	10kHz, 100mVAC, Ls	40.0uH ±10%
SATURATION CURRENT		20% rolloff from initial	2.0A
LEAKAGE INDUCTANCE	1-4	tie(5+6+7+8), 100kHz, 100mVAC, Ls	400nH typ., 1.0uH max.
DIELECTRIC	1-8	1875VAC, 1 second	1500VAC, 1 minute
DIELECTRIC	1-7	1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO		(1-4):(6-8)	1:1, ±1%
TURNS RATIO		(1-4):(5-7)	1:1, ±1%

GENERAL SPECIFICATIONS:

Designed to comply with the following requirements as defined by IEC61558-2-16: - Basic insulation for a primary circuit at a working voltage of 50Vrms.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	_
		Method: Tape & Reel /	
		PKG-0328	$\Psi \cup $
6B	4/20	www.we-online.com/midcom	NVENTION PLACEMENT
6A	3/14	SEE REVISION SHEET FOR RE	VISION LEVEL

Angles: ±1° Fractions: ±1/64

Tolerances unless otherwise specified: Decimals: ±.005 [.13] Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

eiSos p/n: **750313972**

TRANSFORMER

750313972

PART NO.

SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02