

CUSTOMER	TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%,	Ag4%	Yes	Yes



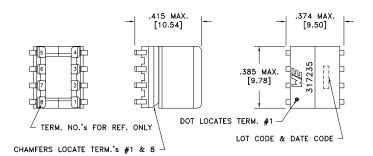

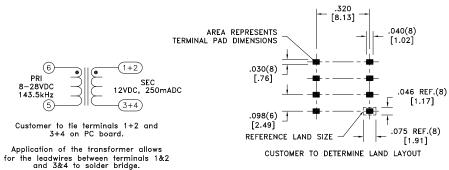

## ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

	PARAMETER		TEST CONDITIONS	VALUE	
	D.C. RESISTANCE	6-5	@20°C	0.036 ohms ±20%	
6B	D.C. RESISTANCE	1-4	tie(1+2, 3+4), @20°C	0.047 ohms ±20%	
	INDUCTANCE	6-5	100kHz, 100mVAC, Ls	16.0uH ±10%	
	SATURATION CURRENT	6-5	20% rolloff from initial	2.4A	
	LEAKAGE INDUCTANCE	6-5	tie(1+2+3+4), 100kHz, 10mVAC, Ls	95nH typ., 240nH max.	
	DIELECTRIC	6-1	tie(3+4), 1875VAC, 1 second	1500VAC, 1 minute	
	TURNS RATIO		(6-5):(1-4), tie(1+2, 3+4)	1:1, ±1%	

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1: Functional insulation only.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

## DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	_
		Method: Tape & Reel	(4)
		PKG-0410	$\Psi$
6B	6/18	www.we-online.com/midcom	CONVENTION
6.4	5/18	SEE REVISION SHEET FOR	REVISION

PLACEMENT

Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Footprint: ±.005 [.13] Fractions: ±1/64

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER** 

PART NO.

750317235

eiSos p/n: **750317235** 

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02