


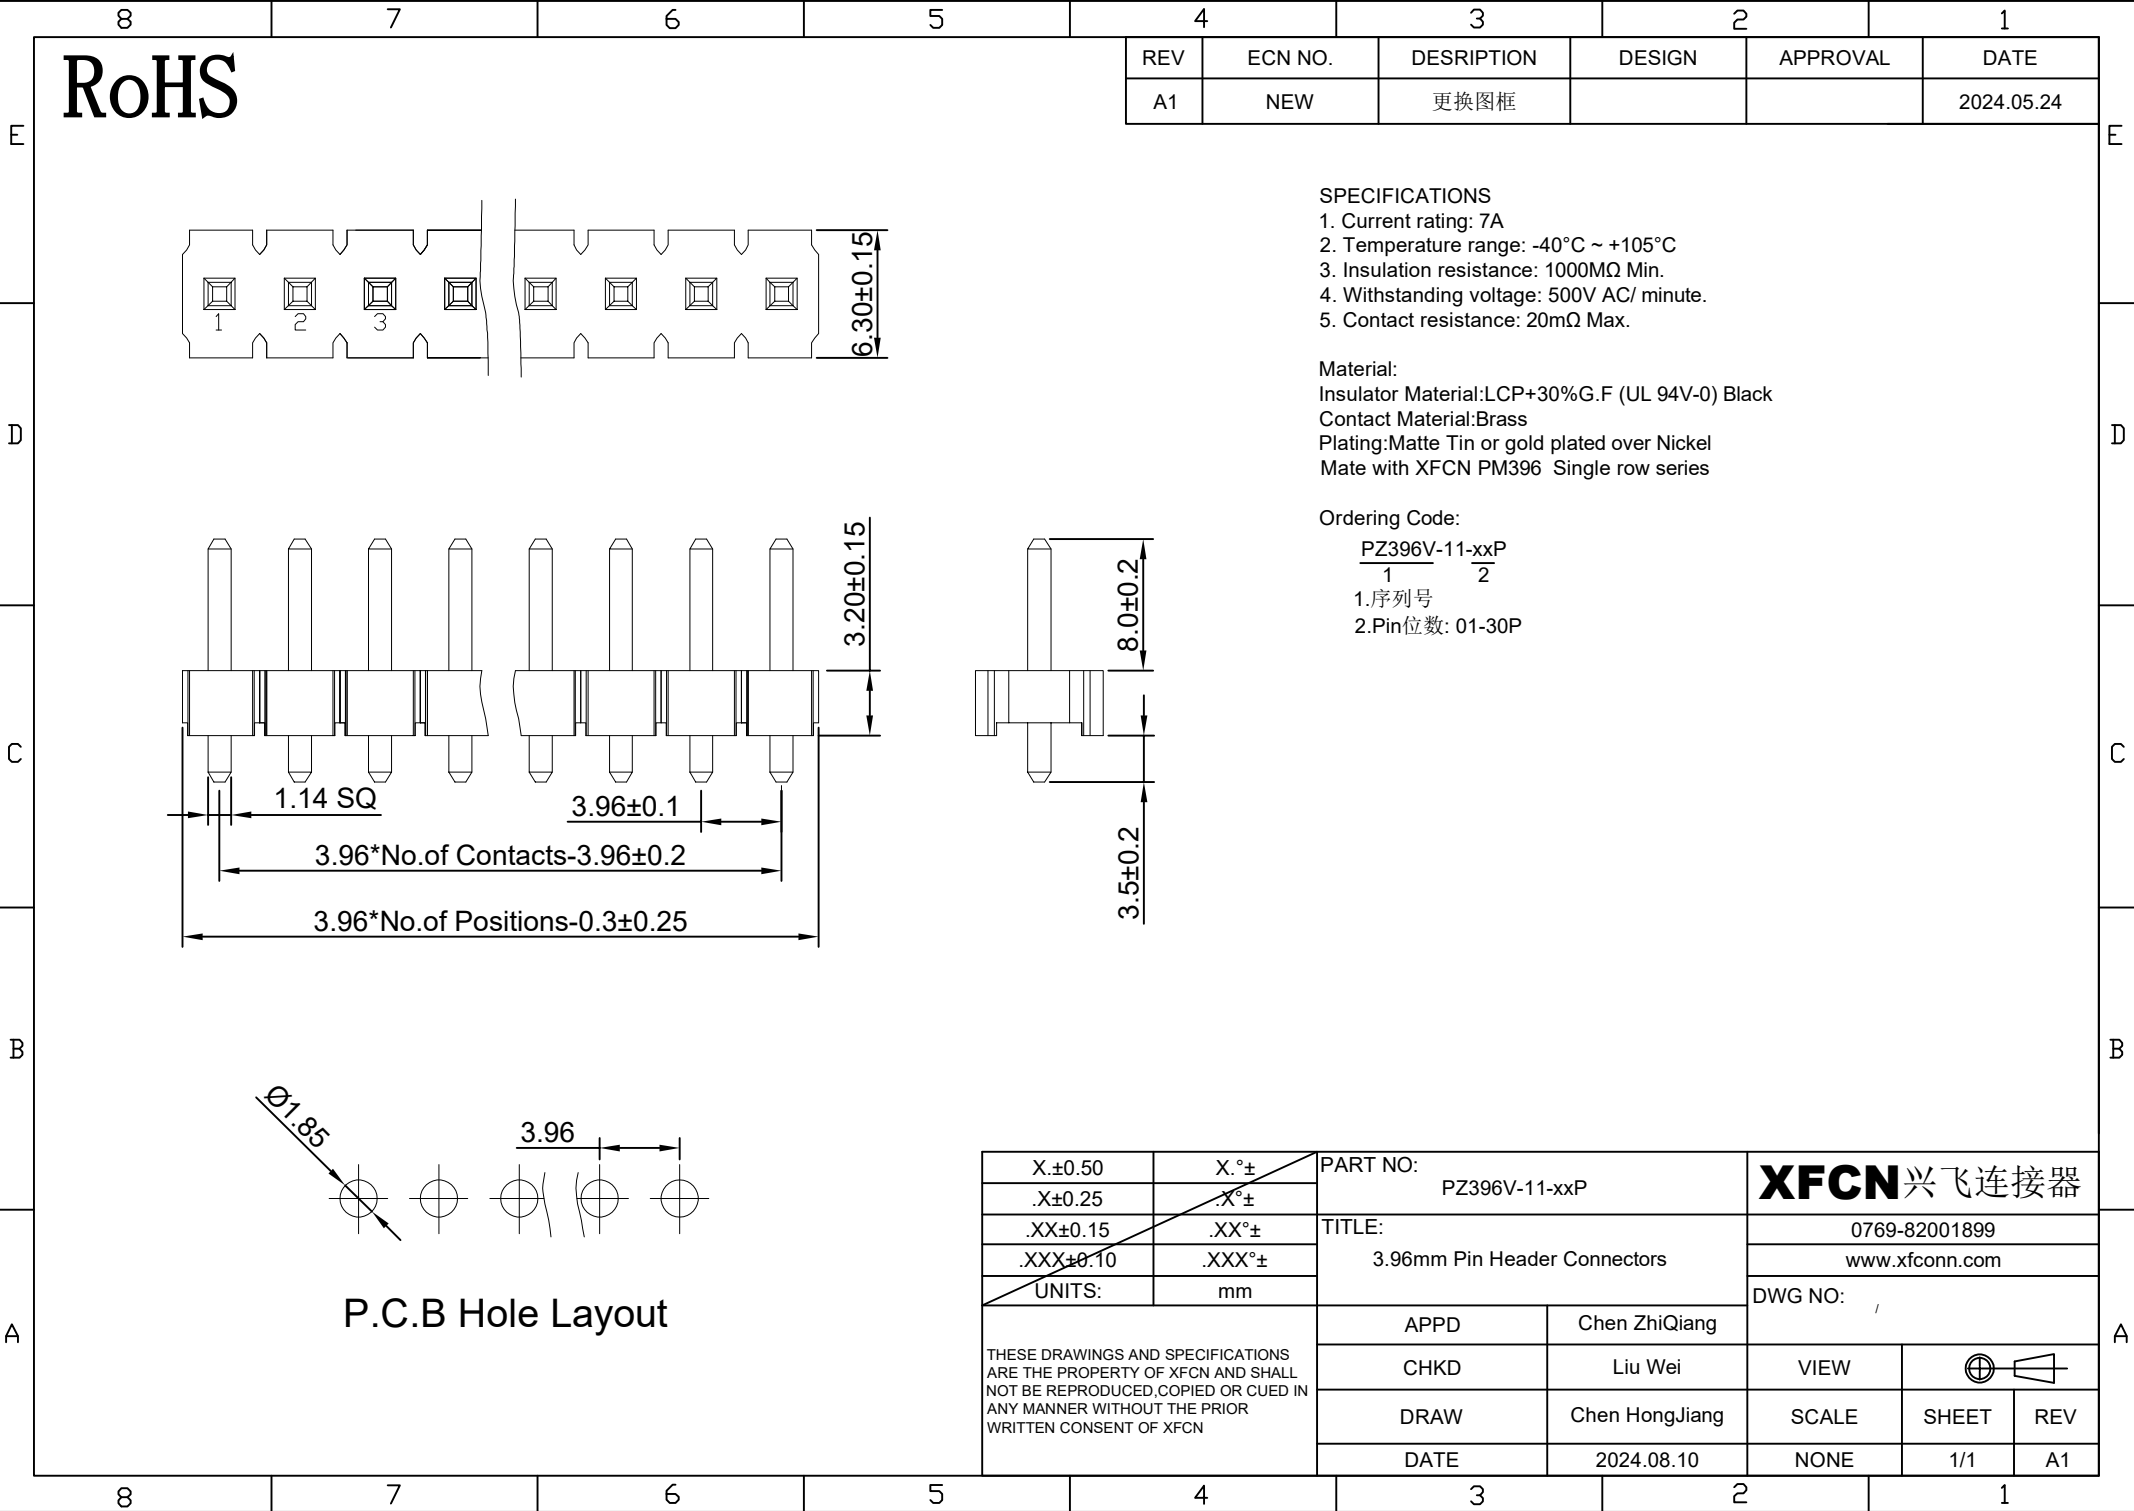

RoHS

SPECIFICATIONS

1. Current rating: 7A
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 500V AC/ minute.
5. Contact resistance: 20mΩ Max.

Material:

Insulator Material:LCP+30%G.F (UL 94V-0) Black

Contact Material:Brass

Plating:Matte Tin or gold plated over Nickel


Mate with XFCN PM396 Single row series

Ordering Code:

PZ396V-11-xxP

1.序列号

2.Pin位数: 01-30P

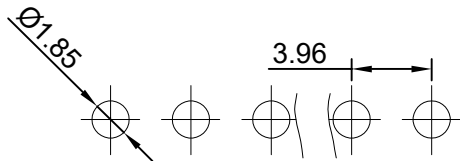

P.C.B Hole Layout

X.±0.50	X.°±	PART NO: PZ396V-11-xxP		XFCN兴飞连接器	
.X±0.25	.X°±				
.XX±0.15	.XX°±	TITLE: 3.96mm Pin Header Connectors		0769-82001899	
.XXX±0.10	.XXX°±			www.xfconn.com	
UNITS:	mm			DWG NO: /	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang	VIEW	
		CHKD	Liu Wei	SCALE	
		DRAW	Chen HongJiang	SHEET	
		DATE	2024.08.10	1/1	
				A1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [XFCN](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)