


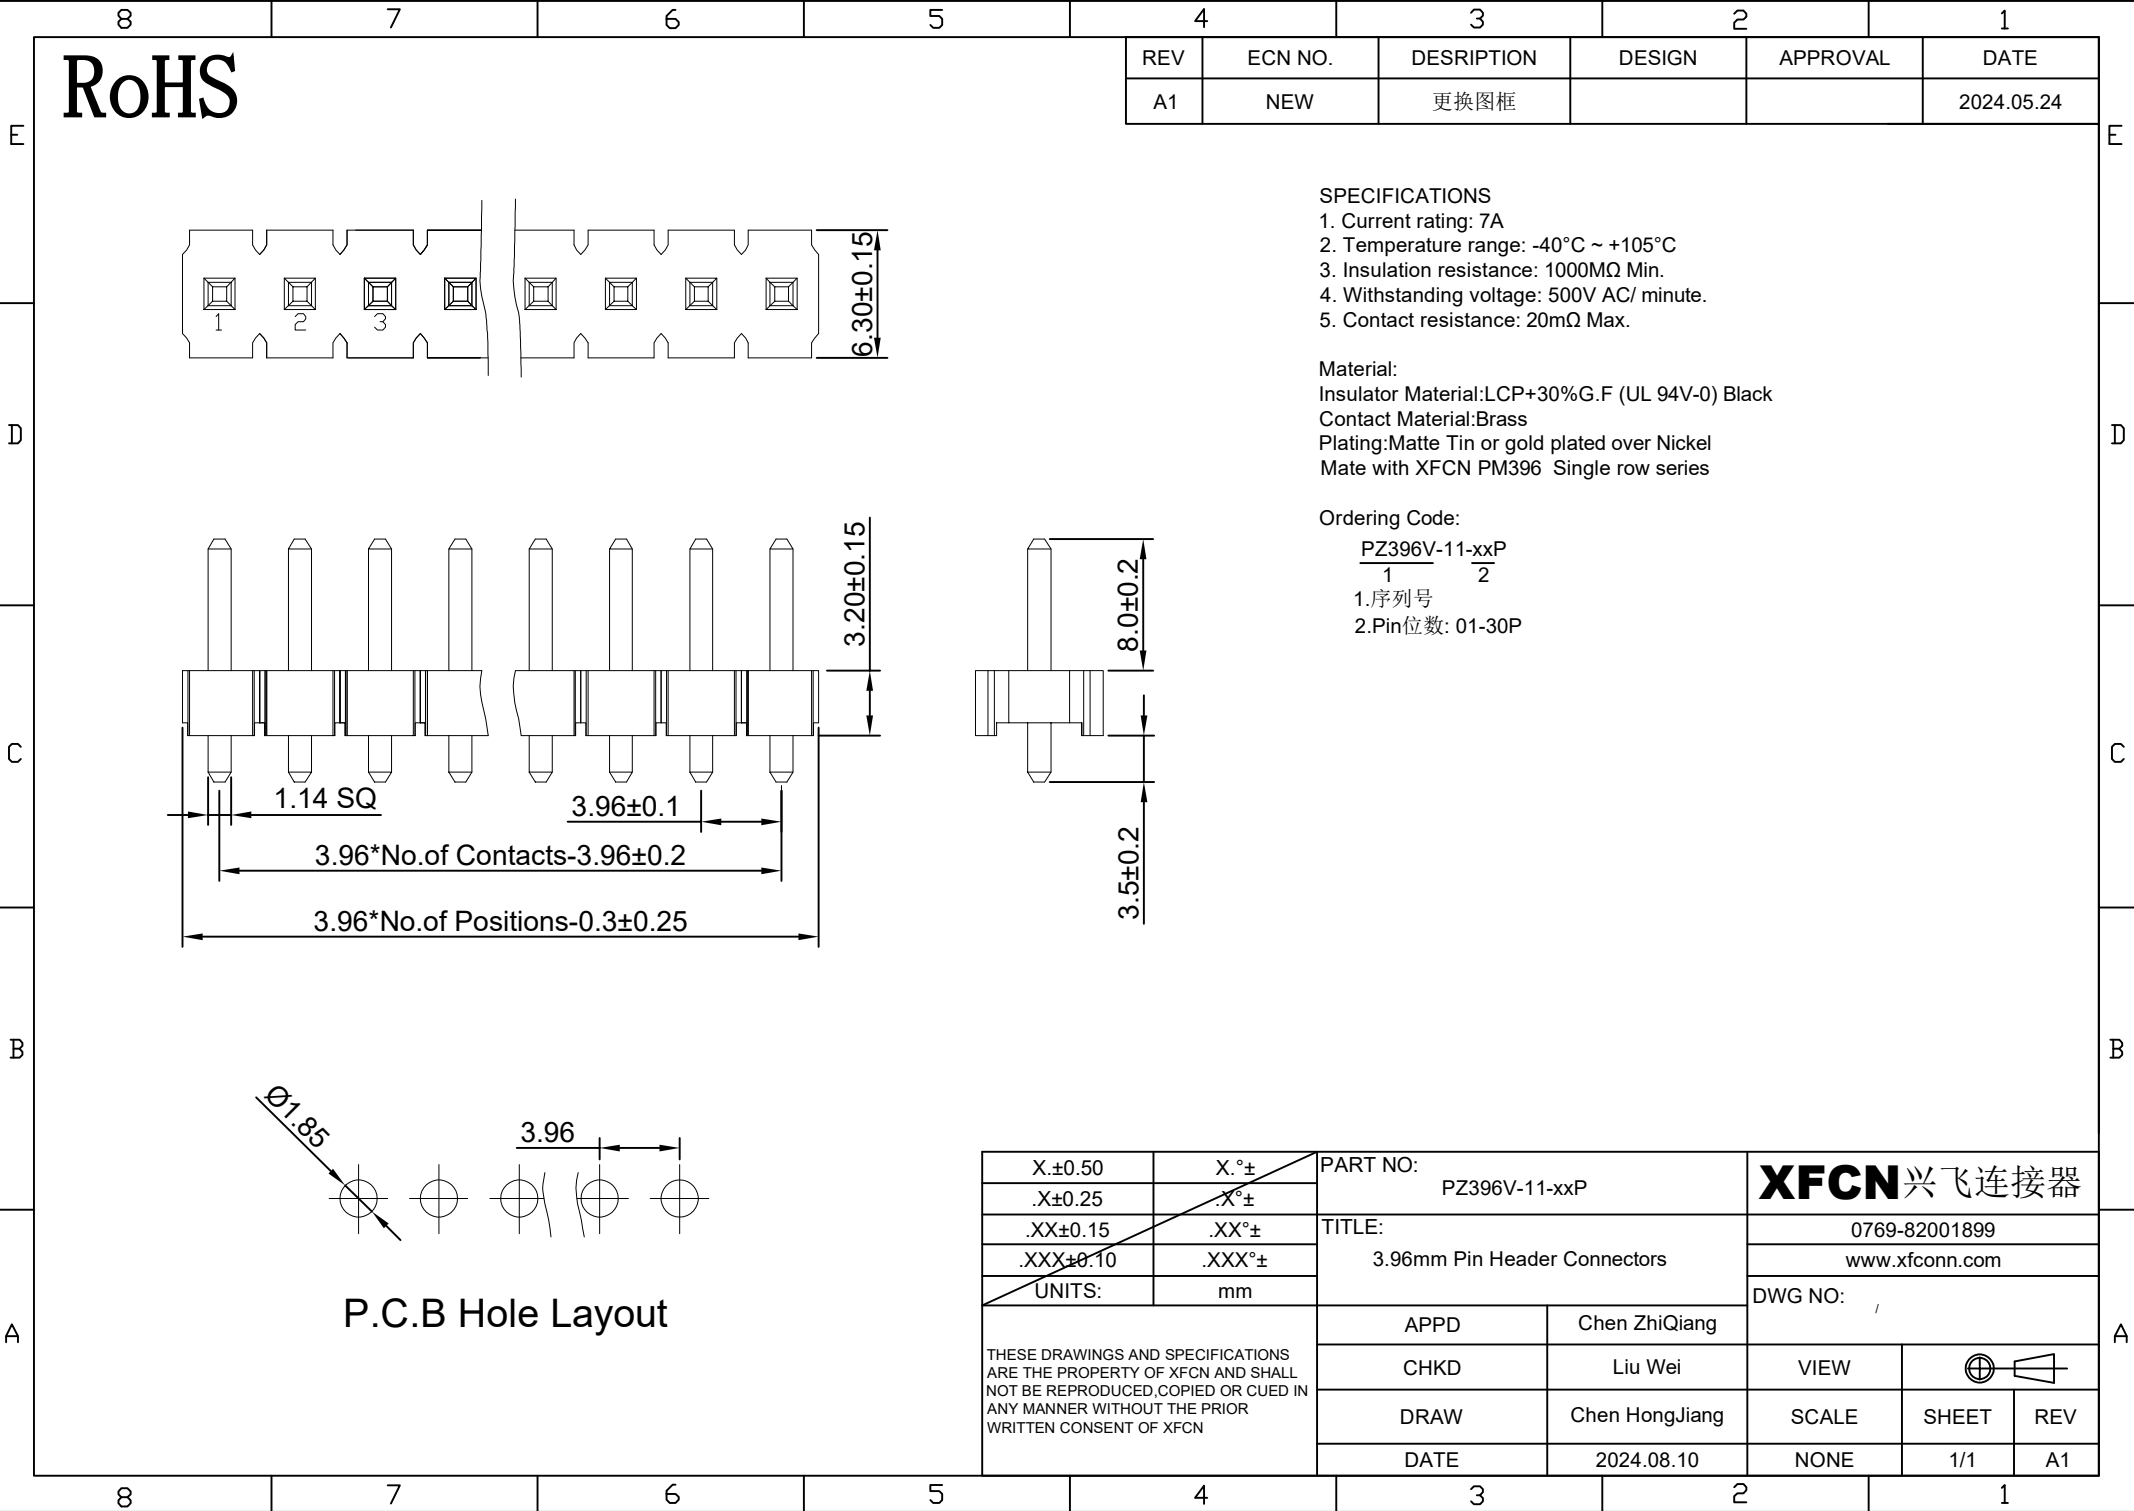

RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

SPECIFICATIONS

- 1. Current rating: 7A
- 2. Temperature range: -40°C ~ +105°C
- 3. Insulation resistance: 1000MΩ Min.
- 4. Withstanding voltage: 500V AC/ minute.
- 5. Contact resistance: 20mΩ Max.

Material:
Insulator Material:LCP+30%G.F (UL 94V-0) Black
Contact Material:Brass
Plating:Matte Tin or gold plated over Nickel
Mate with XFCN PM396 Single row series

Ordering Code:
PZ396V-11-xxP
1 2
1.序列号
2.Pin位数: 01-30P

X.±0.50	X.°±	PART NO: PZ396V-11-xxP		XFCN 兴飞连接器		
.X±0.25	.X°±					
.XX±0.15	.XX°±	TITLE: 3.96mm Pin Header Connectors		0769-82001899		
.XXX±0.10	.XXX°±			www.xfconn.com		
UNITS:	mm			DWG NO: /		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang			
		CHKD	Liu Wei	VIEW		
		DRAW	Chen HongJiang	SCALE	SHEET	REV
		DATE	2024.08.10	NONE	1/1	A1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [XFCN](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)