


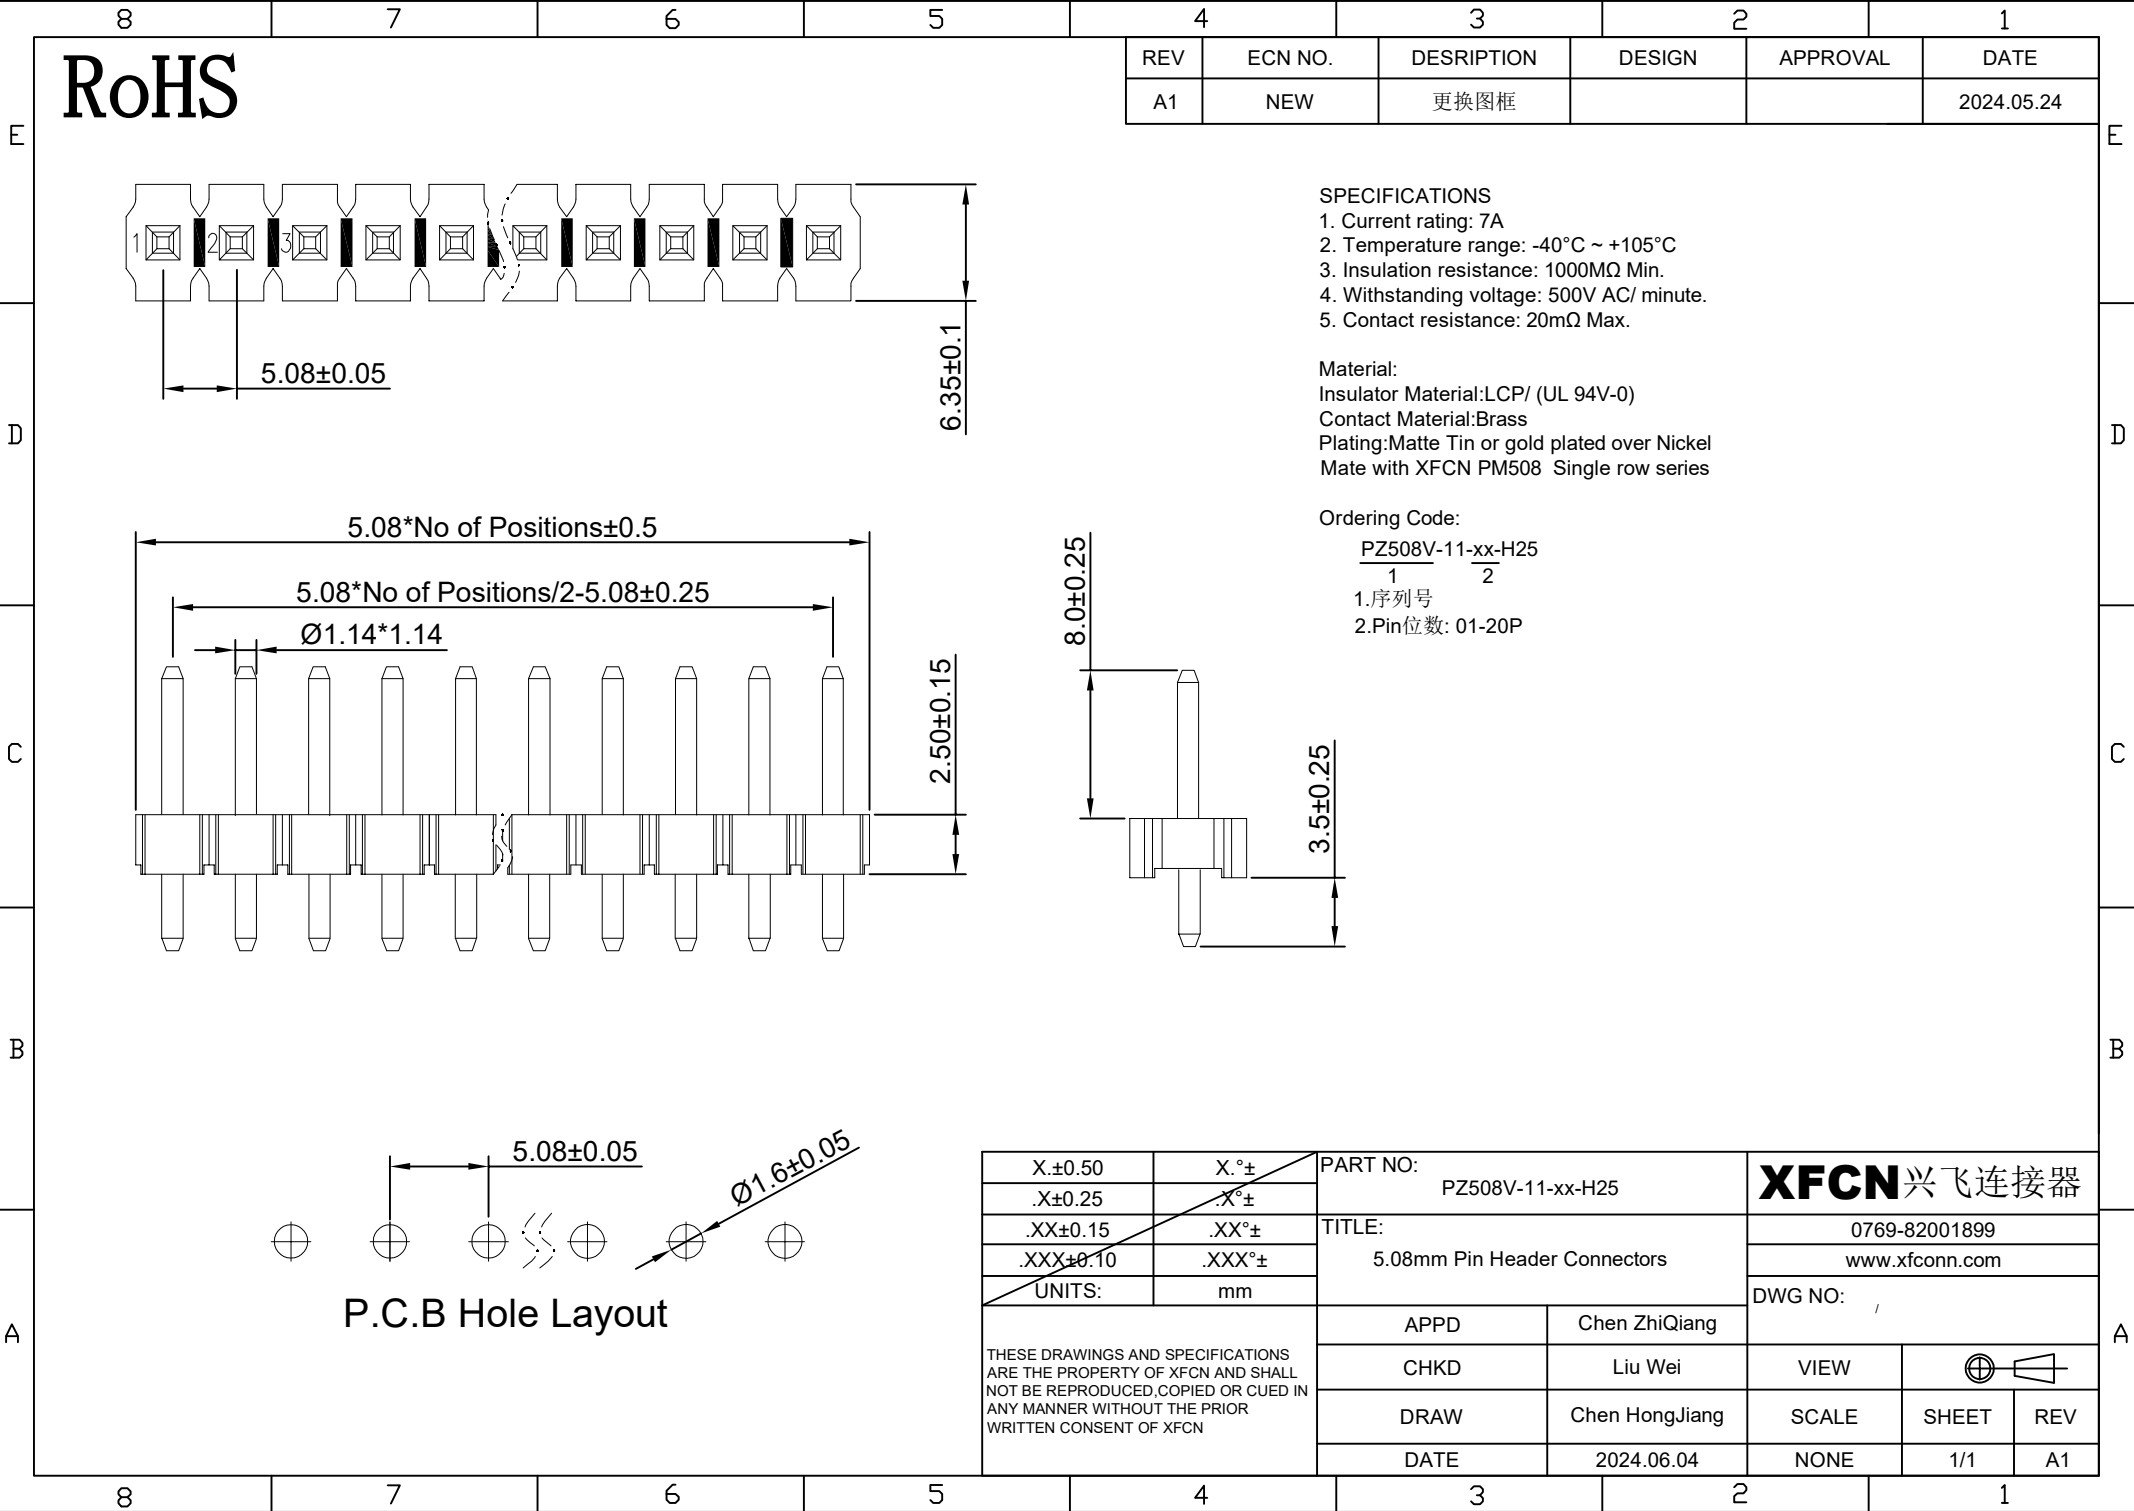


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

- SPECIFICATIONS
- Current rating: 7A
 - Temperature range: -40°C ~ +105°C
 - Insulation resistance: 1000MΩ Min.
 - Withstanding voltage: 500V AC/ minute.
 - Contact resistance: 20mΩ Max.

Material:
Insulator Material:LCP/ (UL 94V-0)
Contact Material:Brass
Plating:Matte Tin or gold plated over Nickel
Mate with XFCN PM508 Single row series

Ordering Code:
PZ508V-11-xx-H25
1 2
1.序列号
2.Pin位数: 01-20P

X.±0.50	X.°±	PART NO: PZ508V-11-xx-H25	XFCN 兴飞连接器		
.X±0.25	.X°±				
.XX±0.15	.XX°±	TITLE: 5.08mm Pin Header Connectors	0769-82001899		
.XXX±0.10	.XXX°±		www.xfconn.com		
UNITS:	mm	DWG NO: /			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN					
		APPD	Chen ZhiQiang		
		CHKD	Liu Wei		
		DRAW	Chen HongJiang		
DATE	2024.06.04	VIEW			
		SCALE	SHEET	REV	
		NONE	1/1	A1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [XFCN](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)