
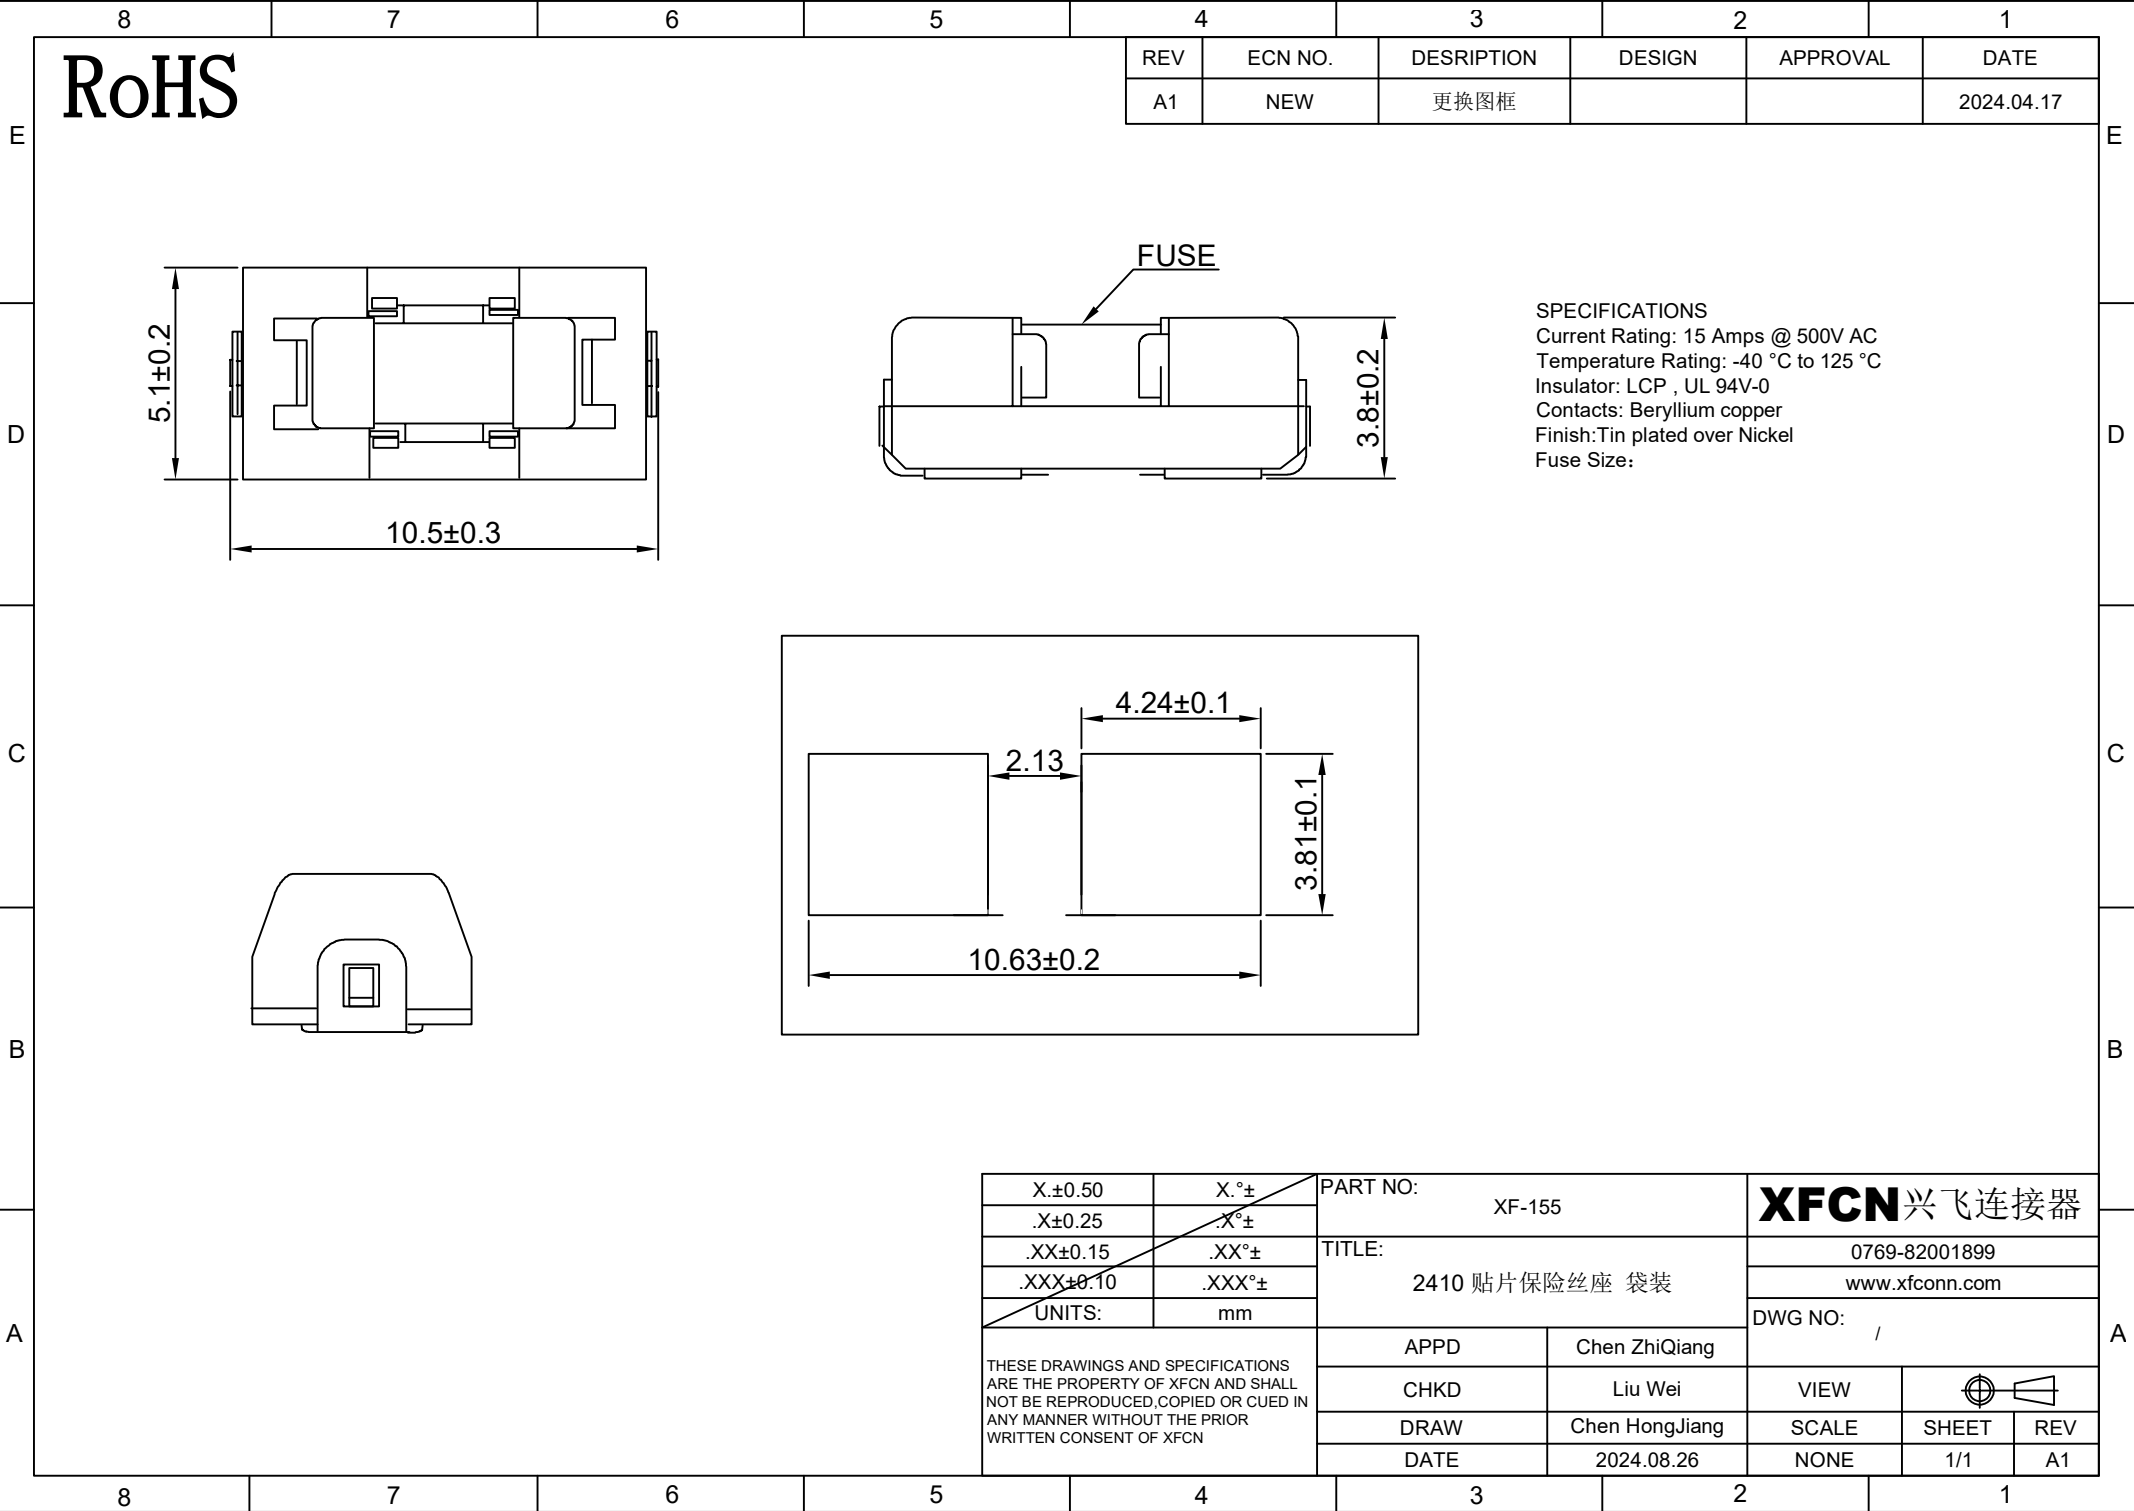




RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.04.17

SPECIFICATIONS
Current Rating: 15 Amps @ 500V AC
Temperature Rating: -40 °C to 125 °C
Insulator: LCP , UL 94V-0
Contacts: Beryllium copper
Finish: Tin plated over Nickel
Fuse Size:

X.±0.50	X.°±	PART NO: XF-155		XFCN 兴飞连接器	
.X±0.25	.X°±				
.XX±0.15	.XX°±	TITLE: 2410 贴片保险丝座 袋装		0769-82001899	
.XXX±0.10	.XXX°±			www.xfconn.com	
UNITS:	mm			DWG NO: /	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang	VIEW 	
		CHKD	Liu Wei		
		DRAW	Chen HongJiang	SCALE	SHEET
		DATE	2024.08.26	NONE	1/1
				REV	A1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[0031.1351.01](#) [6SC30A2IC](#) [F30A3S](#) [F600A3B](#) [80910030](#) [80910080](#) [9-3557-GP REV A](#) [HFH-1](#) [RF30A1S](#) [RF30A2B](#) [RF30A3SP](#)
[15602-04-08-21](#) [HTJ-LES-FUSE](#) [2193](#) [2602](#) [2650](#) [F60A2SQ](#) [T30A2B](#) [G4PB8](#) [2660](#) [HKP-CCHH](#) [341001A](#) [348670](#) [CVRMCC](#) [4202](#) [4537](#)
[HPC](#) [55900008011](#) [345602-010](#) [345603-010](#) [345612](#) [345903A](#) [3833-5](#) [3833-7](#) [3992](#) [4393](#) [4409](#) [CCM630](#) [6SM30A1IC](#) [6T30A2S](#)
[T100A1B](#) [CJ630](#) [T400A1B](#) [BP/HHA-RP](#) [74-FH6](#) [6611HPJ](#) [E92/30CC](#) [03450632H](#) [BK/HTB-68M-R](#) [0101590](#)