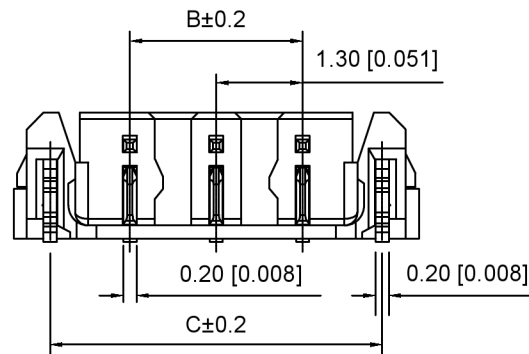
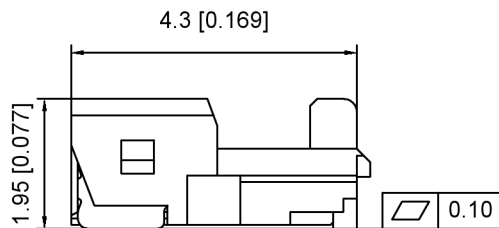


Specifications:

规格:

Voltage rating:30V AC/DC

额定电压: 30V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃~+125℃




温度范围: -40℃~+125℃

Insulation resistance:100MΩ min

绝缘电阻: 100MΩ Min

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max

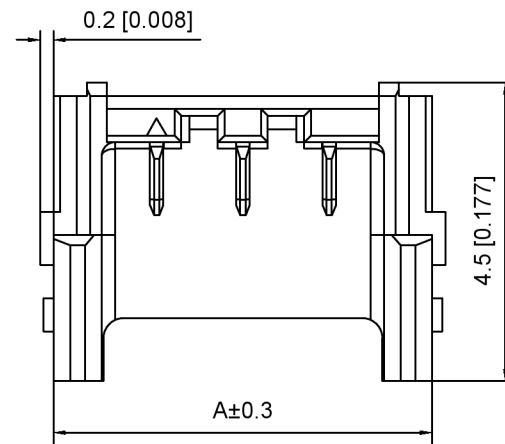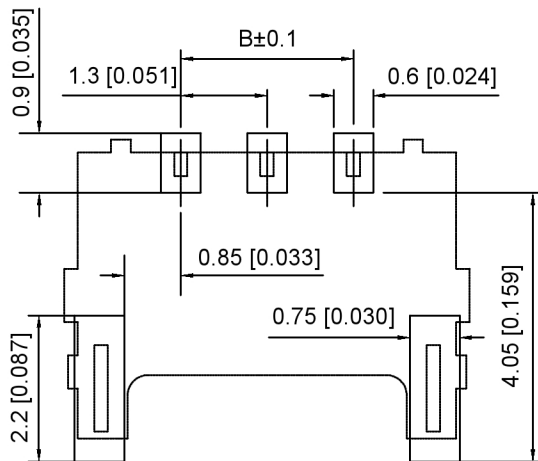

X1300 W R S - XX - 4T V01 X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:R-Stright 90°
- 4.Welding Way:S-SMT
- 5.Row No.Pin No:XX-02~12 Pin
- 6.Material:4T-PA4T UL94V-0
- 7.Plating:V01:Gold Flash
- 8.Color:Blank-Natural ; BK-Black

Recommended PCB Layout
General Tolerance:±0.05

3~12 Pin Shape

02 Pin Shape

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	4.40	1.30	3.70	08	12.20	9.10	11.50
03	5.70	2.60	5.00	09	13.50	10.40	12.80
04	7.00	3.90	6.30	10	14.80	11.70	14.10
05	8.30	5.20	7.60	11	16.10	13.00	15.40
06	9.60	6.50	8.90	12	17.40	14.30	16.70
07	10.90	7.80	10.20				

X1300WRS-XX-4TV01	Brass	Gold Flash	X1300H
X1300WRS-XX-4TV01BK			
PART NO	Material	Plating	Suitable XKB Housing




DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	1.3mm Crimp Style Connector
CHKD		UNIT: mm/in	PART NO.: X1300WRS-XX-4TV01
APPD		SIZE: A4	DWG NO.: X-X1300WRS-XX-4TV01

					ANGLAR	±5°
Δ X					L≤ 4	±0.2
Δ X					4<L≤ 16	±0.3
Δ X					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						




XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

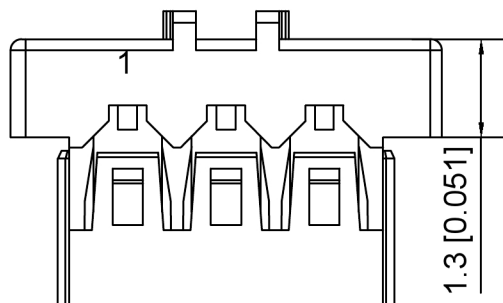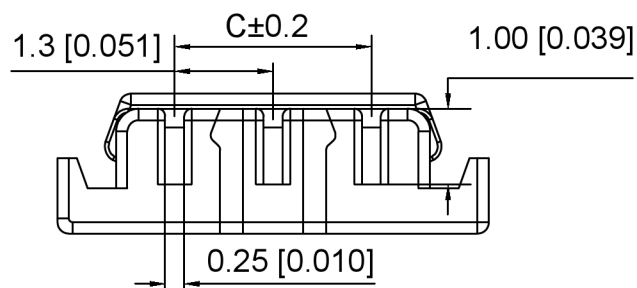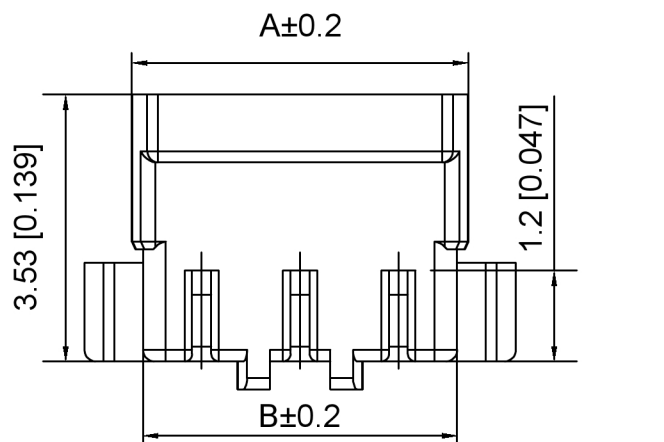

3~12 Pin Shape

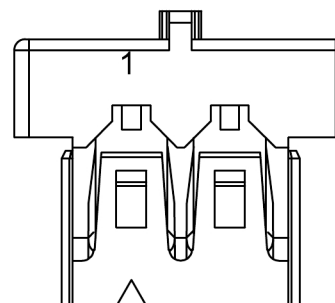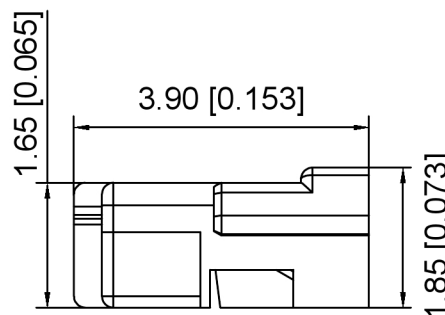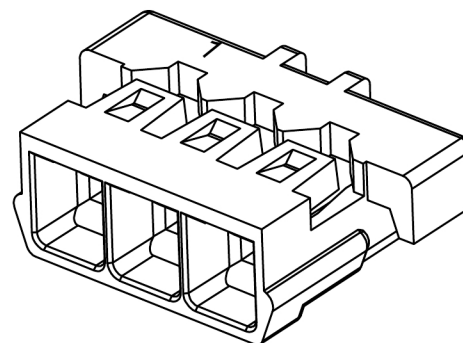

02 Pin Shape

Specifications:

规格:

Voltage rating:30V AC/DC
额定电压: 30V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
Temperature range: -40℃~+125℃
温度范围: -40℃~+125℃
Insulation resistance:100MΩ min
绝缘电阻: 100MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

X1300 H - XX - N0 HF X
① ② ③ ④ ⑤ ⑥

- 1.Series No
- 2.Category:H-HSG
- 3.Row No.Pin No:XX-02~12P
- 4.Material:N0-PA66 UL94V-0
- 5.Special No:HF-Halogen Free
- 6.Color:Blank-Natural ; BK-Black

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	3.15	2.85	1.30	08	10.95	10.65	9.10
03	4.45	4.15	2.60	09	12.25	11.95	10.40
04	5.75	5.45	3.90	10	13.55	13.25	11.70
05	7.05	6.75	5.20	11	14.85	14.55	13.00
06	8.35	8.05	6.50	12	16.15	15.85	14.30
07	9.65	9.35	7.80	/			



X1300H-XX-N0HF	PA66	X1300W	X1300T
X1300H-XX-N0HFBK			
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	1.3mm Crimp Style Connector
CHKD		UNIT: mm/in	PART NO.: X1300H-XX-N0HF
APPD		SIZE: A4	DWG NO.: X-X1300H-XX-N0HF
			WEIGHT
			SHEET
			REVISION

					ANGLAR	±5°
Δ X					L≤ 4	±0.2
Δ X					4<L≤ 16	±0.3
Δ X					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS						UNSPECIFIED TOLERANCES
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

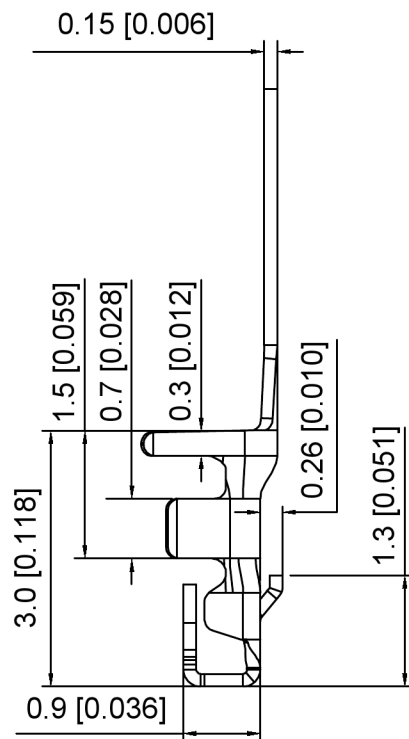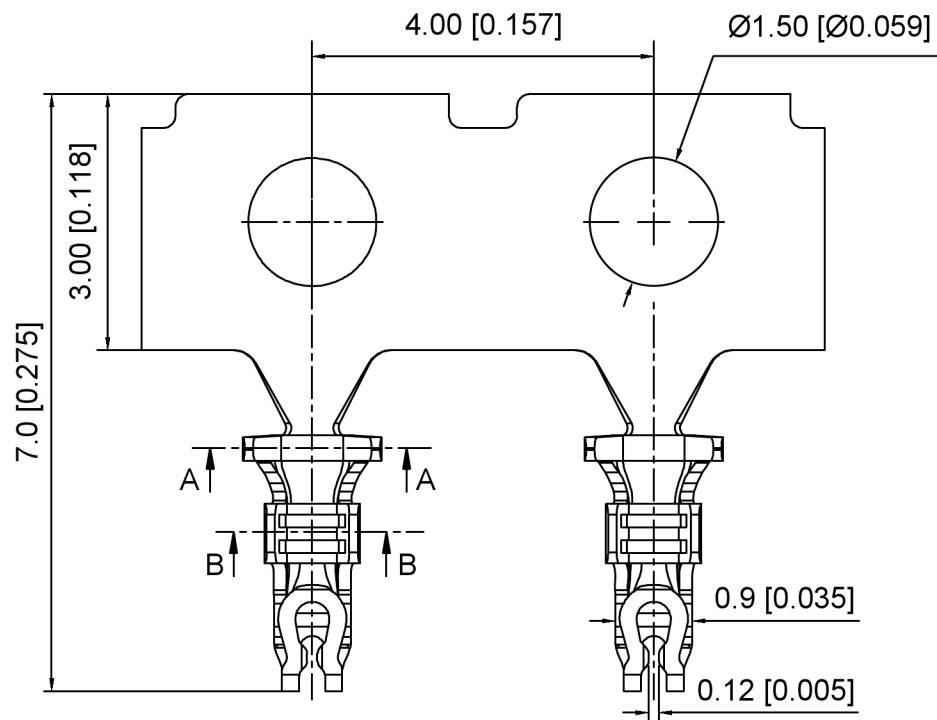

Specifications:

规格:

Voltage rating:30V AC/DC

额定电压: 30V AC/DC

Current rating:2A AC/DC

额定电流: 2A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃~+125℃

温度范围: -40℃~+125℃

Insulation resistance:100MΩ

绝缘电阻: 100MΩ

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max



X1300 T - P V01
① ② ③ ④

1.Series No


2.Category:T-Terminal

3.Material:P-Phosphor Bronze


4.Plating:V01-Gold Flash

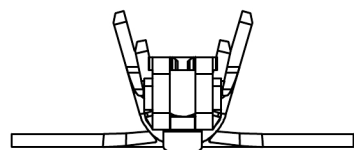

SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1

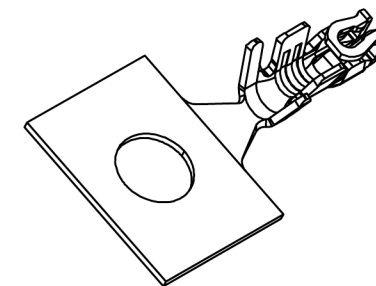

X1300T-PV01	Phosphor Bronze	AWG#30~26 O.D 0.98mm Max	X9635TF
PART NO	Material	Wire Range	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	1.3mm Crimp Style Connector
CHKD		UNIT: mm/in	PART NO.: X1300T-PV01
APPD		SIZE: A4	DWG NO.: X-X1300T-PV01

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)