



3P

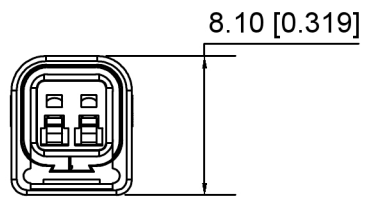

2P

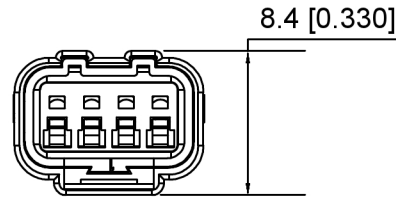

4P

Specifications:

规格:

Voltage rating: 100V AC/DC

额定电压: 100V AC/DC

Current rating: 3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage: 1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range: -25°C~+85°C




温度范围: -25°C~+85°C

Insulation resistance: 1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance: 20mΩ Max

接触电阻: 20mΩ Max

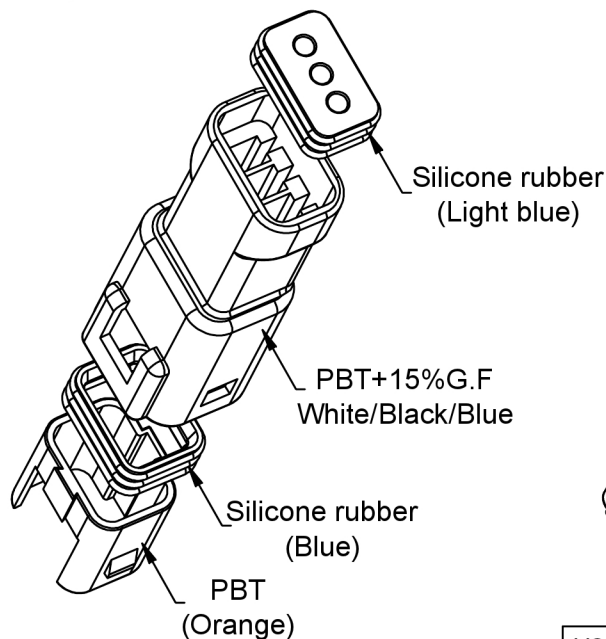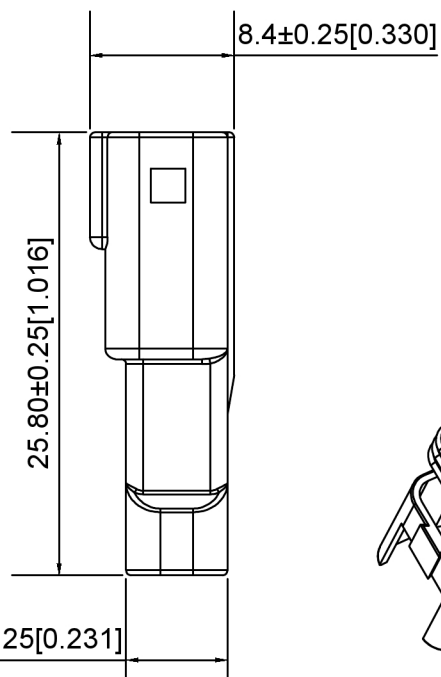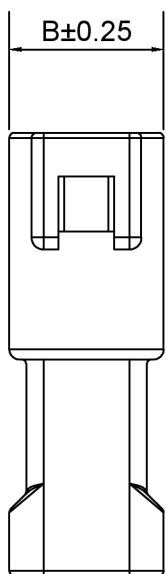

X2050 H F - XX - PT
① ② ③ ④ ⑤

1. Series No
2. Category: H-HSG
3. Category: F-Female
4. Row No. PIN No: XX-02Pin-08Pin
5. Material: PT-PBT 94V-0

Poles	Dimensions(mm)	
	A	B
02	2.00	7.00
03	4.00	9.00
04	6.00	11.00
06	4.00	9.80
08	6.00	11.00

X2050HF-XX-PT	PBT	X2050HM	X2050TM
PART NO	Material	Suitable XKB Housing	Suitable XKB Terminal
DSND	SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector	
DWN	VIEW:	PART NO.: X2050HF-XX-PT	
CHKD	UNIT: mm/in	DWG NO.: X-X2050HF-XX-PT	
APPD	SIZE: A4	WEIGHT	SHEET 1/1
UNSPECIFIED TOLERANCES			
XKB INDUSTRIAL PRECISION CO., LIMITED			
		REVISION	A0

广东星坤科技股份有限公司

日期

文件工程章

REVISIONS	DATE	REVISED	APPROVED	DESCRIPTION



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [M902-2344](#) [72.330.1035.1](#) [73.353.4028.0](#) [F166900](#) [F358300-B](#) [F407400](#) [776880-1](#)
[827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [98891-1012](#) [12004475-L](#) [12020308](#) [12041318-B](#)
[12052466](#) [12059716](#) [12064869](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12110546-B](#) [12131792](#) [12084688](#) [12092346](#)
[HD34-18-14PT](#) [HD46-24-23SN-059](#) [HDB36-24-16PN-059](#) [HDP26-24-9SE-L015](#) [12185280](#) [12185550](#) [12336-12](#) [12191172-B](#) [12S](#)
[13545280](#) [13577943](#) [13681974](#) [13737722-B](#) [13830674](#) [13832576](#) [13849772](#)