
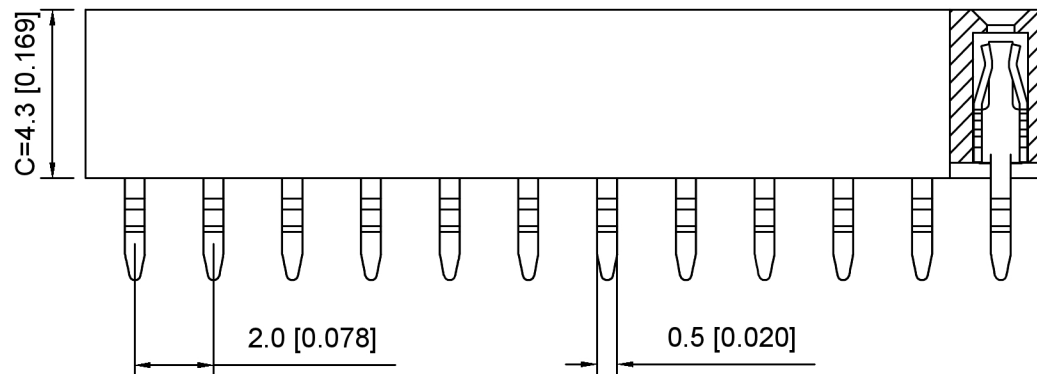
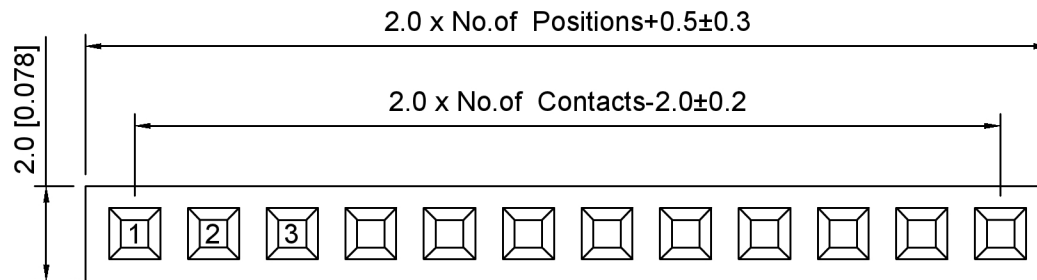


PCB LAYOUT

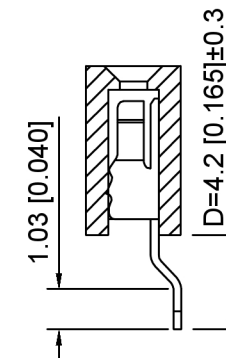

Specifications:
规格:
Voltage rating: 250V AC/DC
额定电压: 250V AC/DC
Current rating: 3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage: 1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range: -40°C~+105°C
温度范围: -40°C~+105°C
Insulation resistance: ≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance: ≤20mΩ
接触电阻: ≤20mΩ
Material: PA6T UL94V-0
材质: PA6T UL94V-0
Plating Category: 1U"Gold
镀层: 1U"Gold
Reflow soldering temperature: 260±5°C, 10S
回流焊温度: 260±5°C, 10S

X4611 F R S - XX - C43 D42
① ② ③ ④ ⑤ ⑥ ⑦

1. Series No
2. Category: F-Female
3. Welding Board Angle: R-Stright 90°
4. Welding Way: S-SMT
5. Row No. Pin No: XX-01~40 Pin
6. Plastic height: C=4.3mm
7. Pin Length: D=4.2mm

X4611FRS-XX-C43D42	PA6T	Brass	X4611W
PART NO	Material	Material(Pin)	Suitable XKB Wafer

广东星坤科技股份有限公司	
Δ#	日期
ΔX	数
ΔX	数
MARK	文件工程章

DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
REVISIONS				
ANGLAR	±5°			
L ≤ 4	±0.2			
4 < L ≤ 16	±0.3			
16 < L ≤ 63	±0.4			
L > 63	±0.5			

XKB

DSND		SCALE: N/A	MODEL TYPE: 2.0mm BTB Connector		
DWN		VIEW: 	PART NO.: X4611FRS-XX-C43D42		
CHKD		UNIT: mm/in	DWG NO.: X-X4611FRS-XX-C43D42		
APPD		SIZE: A4			
L PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

XKB INDUSTRIAL PRECISION CO., LIMITED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [XKB](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)