

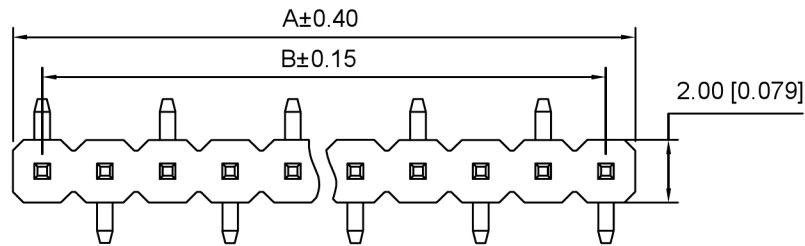
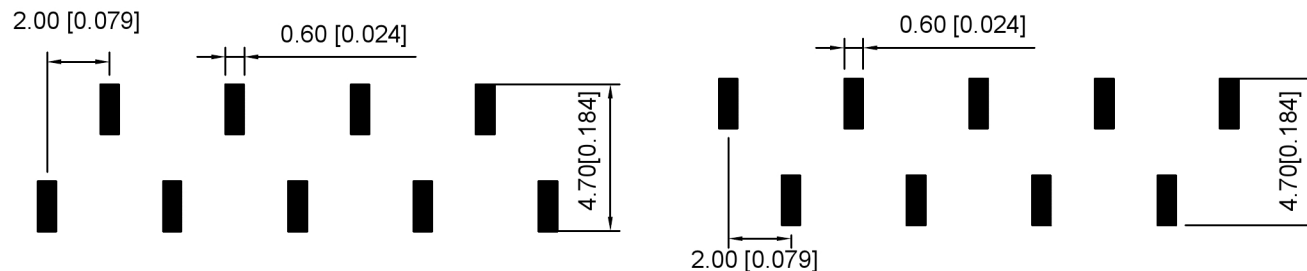
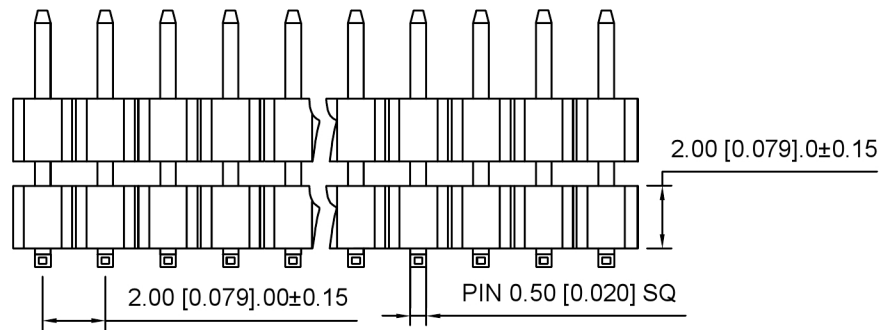


R1

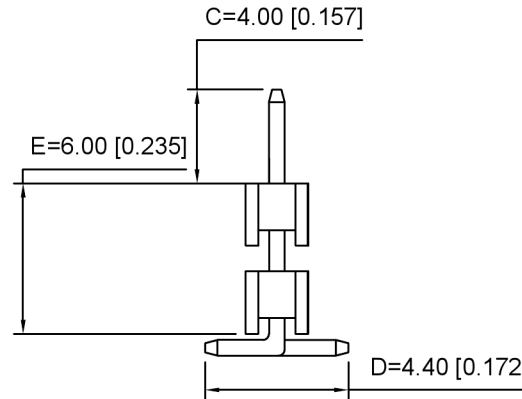

R2

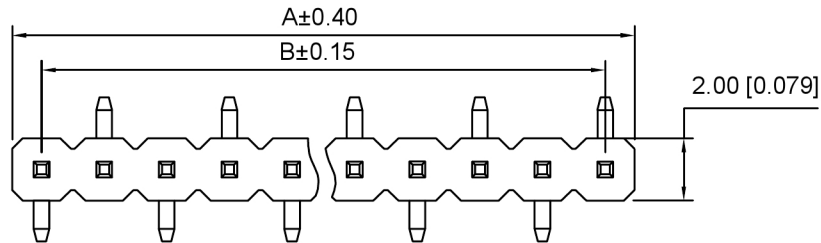

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃-+105℃

温度范围: -40℃-+105℃

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA9T

材质: PA9T

Plating Category:1U"Gold

镀层: 1U"Gold

Reflow soldering temperature:260±5℃, 10S

回流焊温度: 260±5℃, 10S

X4612 W V S - XX I - C40 D44 - E60 X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- 1.Series No.
- 2.Category:W-Water
- 3.Welding Board Angle:V-Stright 180°
- 4.Welding Way:S-SMT
- 5.Row No -Pin No:XX-02P-40P
- 6.Plastic height: l=2.0mm
- 7.Pin length: C=4.0mm
- 8.Pin Pitch:D=4.4mm
- 9.Pin length:E=6.0mm
- 10.Type:X-R1 ; R2

X4612WVS-XXI-C40D44-E60X	PA9T	Brass	1U"Gold	X4611F
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Female

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR	±5°			
L≤ 4	±0.2			
4<L≤ 16	±0.3			
16<L≤ 63	±0.4			
L> 63	±0.5			

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	2.0 BTB Connector
CHKD	UNIT: mm/in	PART NO.: X4612WVS-XXI-C40D44-E60X
APPD	SIZE: A4	DWG NO.: X-X4612WVS-XXI-C40D44-E60X
XKB INDUSTRIAL PRECISION CO.,LIMITED		WEIGHT
		SHEET
		REVISIC
		1/1
		A0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)