
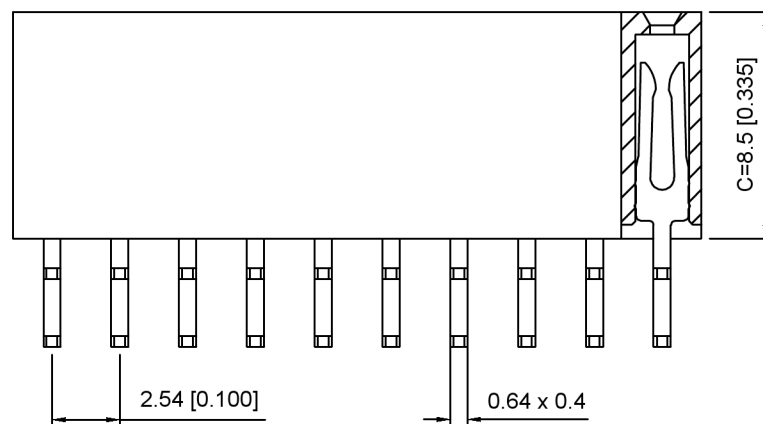
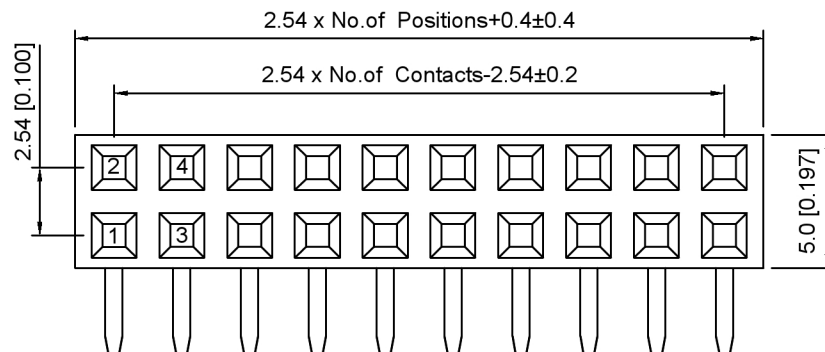


PCB LAYOUT

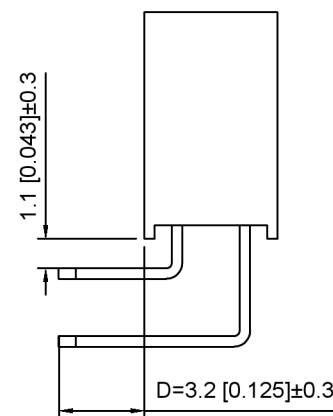

Specifications:

规格:

Voltage rating: 250V AC/DC

额定电压: 250V AC/DC

Current rating: 3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage: 1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range: -40°C ~ +105°C

温度范围: -40°C ~ +105°C

Insulation resistance: ≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance: ≤20mΩ

接触电阻: ≤20mΩ

Material: PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category: 1U"Gold

镀层: 1U"Gold

Wave soldering temperature: 255±5°C, 10S

波峰焊温度: 255±5°C, 10S

X6521 F R - 2xXX - C85 D32
① ② ③ ④ ⑤ ⑥

1. Series No
2. Category: F-Female
3. Welding Board Angle: R-Straight 90°
4. Row No. Pin No: 2xXX-2x01~2x40P
5. Plastic Height: C=8.5mm
6. Pin Length: D=3.2mm

X6521FR-2xXX-C85D32	PA6T	Brass	X6521W
PART NO	Material	Material(Pin)	Suitable XKB Wafer

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	2.54mm BTB Connector
CHKD	UNIT: mm/in	PART NO.: X6521FR-2xXX-C85D32
APPD	SIZE: A4	DWG NO.: X-X6521FR-2xXX-C85D32
KKB INDUSTRIAL PRECISION CO., LIMITED		WEIGHT
		SHEET
		REVISION
		1/1
		A0

XKB

广东星坤科技股份有限公司

Δ	日期
Δ	日期
Δ	日期
MARK	文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR	±5°			
L ≤ 4	±0.2			
4 < L ≤ 16	±0.3			
16 < L ≤ 63	±0.4			
L > 63	±0.5			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XKB](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)