



- Regulated Single & Dual Output
- Wide 4:1 Input Range
- SIP Package
- 1500 VDC Isolation
- UL Approved
- Remote On/Off
- Continuous Short Circuit Protection
- 3 Year Warranty

## Specification

### Input

Input Voltage Range	• See table
Input Reflected Ripple Current	• 20 mA pk-pk through 12 $\mu$ H inductor and 47 $\mu$ F capacitor, 5 Hz to 20 MHz
Input Filter	• Capacitor
Input Surge	• 24 V models: 50 VDC for 100 ms 48 V models: 100 VDC for 100 ms

### Output

Output Voltage	• See table
Minimum Load	• None <sup>(1)</sup>
Line Regulation	• $\pm 0.5\%$ max
Load Regulation	• $\pm 0.5\%$ max from 10-100% load <sup>(1)</sup>
Setpoint Accuracy	• $\pm 1\%$ max
Ripple & Noise	• 50 mV pk-pk max, 20 MHz bandwidth
Short Circuit Protection	• Continuous with auto recovery (foldback)
Cross Regulation	• $\pm 5\%$ on dual output models <sup>(2)</sup>
Remote On/Off	• On: Pin floating or pulled to -Vin Off: Pin driven to +2.7 to 15 VDC with respect to -Vin Vmax: 15 Vdc

Temperature Coefficient	• 0.02%/C
-------------------------	-----------

### General

Efficiency	• See table
Isolation Voltage	• 1500 VDC
Isolation Resistance	• $10^9 \Omega$
Isolation Capacitance	• 500 pF max
Switching Frequency	• 250 kHz typical
MTBF	• >1.2 MHrs to MIL-HDBK-217F at 25 °C, GB

### Environmental

Operating Temperature	• -40 °C to +100 °C, derate from 100% load at 75 °C to 0% load at 100 °C
Storage Temperature	• -40 °C to +125 °C
Case Temperature	• 100 °C max
Cooling	• Convection-cooled

### Safety


Safety Approvals	• UL60950-1, CAN/CSA C22.2 No.60950-1, UL62368-1, CE (Meets all applicable directives), UKCA (Meets all applicable legislation)
------------------	---

### Notes

1. Operation at no load will not damage the converter but may not meet all specifications.
2. When one output is set to 100% load and the other varies between 25%-100% load.
3. Input current measured at nominal input voltage
4. Pin pitch tolerance:  $\pm 0.014$  ( $\pm 0.35$ )
5. Case tolerance:  $\pm 0.02$  ( $\pm 0.5$ )
6. Weight: 0.014 lbs (6.5 g)

Input Voltage	Output Voltage	Output Current	No Load Input Current <sup>(3)</sup>	Max Capacitive Load	Efficiency	Model Number
9.0-36.0V	3.3 V	500 mA	10 mA	2200 $\mu$ F	75%	IM240SSA
	5.0 V	400 mA	10 mA	1000 $\mu$ F	81%	IM240SSA
	12.0 V	165 mA	10 mA	165 $\mu$ F	84%	IM241SSA
	15.0 V	135 mA	10 mA	100 $\mu$ F	85%	IM241SSA
	$\pm 5.0$ V	$\pm 200$ mA	10 mA	$\pm 470$ $\mu$ F	81%	IM240SS
	$\pm 12.0$ V	$\pm 85$ mA	10 mA	$\pm 100$ $\mu$ F	83%	IM241SS
	$\pm 15.0$ V	$\pm 65$ mA	10 mA	$\pm 47$ $\mu$ F	82%	IM241SS
18.0-75.0V	3.3 V	500 mA	5 mA	2200 $\mu$ F	75%	IM480SSA
	5.0 V	400 mA	5 mA	1000 $\mu$ F	80%	IM480SSA
	12.0 V	165 mA	5 mA	165 $\mu$ F	84%	IM481SSA
	15.0 V	135 mA	5 mA	100 $\mu$ F	84%	IM481SSA
	$\pm 5.0$ V	$\pm 200$ mA	5 mA	$\pm 470$ $\mu$ F	80%	IM480SS
	$\pm 12.0$ V	$\pm 85$ mA	5 mA	$\pm 100$ $\mu$ F	81%	IM481SS
	$\pm 15.0$ V	$\pm 65$ mA	5 mA	$\pm 47$ $\mu$ F	84%	IM481SS

### Mechanical Details

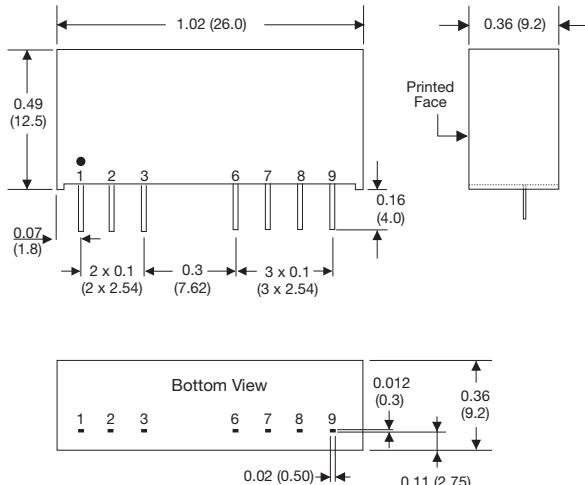

PIN CONNECTIONS					
Pin	Single	Dual	Pin	Single	Dual
1	-V Input	-V Input	7	N.C.	Common
2	+V Input	+V Input	8	N.C.	N.C.
3	Remote On/Off	Remote On/Off	9	-V Output	-V Output
6	+V Output	+V Output			

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Isolated DC/DC Converters](#) category:***

***Click to view products by [XP Power manufacturer:](#)***

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)