

JCJ Series



- 2:1 Input Range
- DIP-24 Metal Package
- Operating Temperature -40°C to $+100^{\circ}\text{C}$
- Single & Dual Outputs
- Continuous Short Circuit Protection
- 1500 VDC Isolation
- 3 Year Warranty

Specification

Input

Input Voltage Range	• 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-75 VDC)
Input Current	• See table
Input Filter	• Pi network
Input Reflected Ripple Current	• JCJ08: 35 mA, JCJ10: 20 mA pk-pk through 12 μH inductor
Input Surge	• 12 V models 24/25 VDC for 100 ms • 24 V models 40/50 VDC for 100 ms • 48 V models 100 VDC for 100 ms
Undervoltage Lockout	• None
Reverse Voltage Protection	• None

Output

Output Voltage	• See table
Output Voltage Balance	• $\pm 1\%$ max, dual output models
Minimum Load	• No minimum load required
Initial Set Accuracy	• $\pm 1\%$ max
Line Regulation	• $\pm 0.5\%$ max
Load Regulation	• $\pm 0.7\%$ for 2.5-3.3 V models, $\pm 0.5\%$ for all other models (see note 2)
Cross Regulation	• $\pm 5\%$ on dual output models (see note 3)
Transient Response	• $< 3\%$ max deviation, recovery to within 1% in 200 μs for a 25% load change
Ripple & Noise	• 75 mV pk-pk, 20 MHz bandwidth, (see note 4)
Overvoltage Protection	• JCJ10: 3.3 V models: 3.9 V typ., 5 V models: 6.2 V typ., 12 V models: 15.0 V typ., 15 V models: 18.0 V typ., ± 12 V models: ± 15.0 V typ., ± 15 V models: ± 18.0 V typ. JCJ08: No OVP
Overload Protection	• $> 150\%$ of full load
Short Circuit Protection	• Trip & restart (hiccup) with auto recovery
Maximum Capacitive Load	• See tables
Temperature Coefficient	• $\pm 0.02/^{\circ}\text{C}$ max

General

Efficiency	• See tables
Isolation	• 1500 VDC Input to Output • 1000 VDC Input to Case • 1000 VDC Output to Case
Isolation Capacitance	• 1200 pF max
Switching Frequency	• 330 kHz typical
Power Density	• JCJ10: 25 W/in³ • JCJ08: 20 W/in³
MTBF	• > 900 KHrs to MIL-HDBK-217F at 25°C, GB

Environmental

Operating Temperature	• -40°C to $+100^{\circ}\text{C}$, derate from 100% load at $+60^{\circ}\text{C}$ to no load at $+100^{\circ}\text{C}$
Case Temperature	• $+100^{\circ}\text{C}$ max
Storage Temperature	• -40°C to $+125^{\circ}\text{C}$
Humidity	• Up to 95% RH, non-condensing
Cooling	• Natural convection

EMC

Emissions	• EN55032 Class A conducted & radiated with external components, see application note
ESD Immunity	• EN61000-4-2, 8 kV air discharge, 4 kV contact discharge • JCJ10: 6 kV contact discharge, Perf Criteria A
EFT/Burst	• EN61000-4-4, level 1 • JCJ10: level 3, Perf Criteria A, (see note 5)
Surge	• JCJ08: EN61000-4-5, installation class 2, JCJ10: installation class 3, Perf Criteria A, (see note 5)
Conducted Immunity	• EN61000-4-6, 3 Vrms • JCJ10: 10 Vrms, Perf Criteria A
Magnetic Field	• EN61000-4-8, 1 A/m Perf Criteria A

Safety


Safety Approvals	• UL62368-1, CAN/CSA C22.2 No. 62368-1 CE (Meets all applicable directives), UKCA (Meets all applicable legislation)
------------------	--

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
9-18 V	3.3 V	2.000 A	20 mA	0.69 A	3300 μ F	80%	JCJ0812S3V3
	5.0 V	1.500 A	20 mA	0.76 A	2200 μ F	82%	JCJ0812S05
	12.0 V	0.665 A	20 mA	0.78 A	470 μ F	85%	JCJ0812S12
	15.0 V	0.535 A	20 mA	0.80 A	220 μ F	83%	JCJ0812S15
	± 5.0 V	± 0.800 A	20 mA	0.81 A	± 1000 μ F	82%	JCJ0812D05
	± 12.0 V	± 0.335 A	20 mA	0.79 A	± 220 μ F	84%	JCJ0812D12
18-36 V	3.3 V	2.000 A	15 mA	0.34 A	3300 μ F	80%	JCJ0824S3V3
	5.0 V	1.500 A	15 mA	0.38 A	2200 μ F	82%	JCJ0824S05
	12.0 V	0.665 A	15 mA	0.39 A	470 μ F	85%	JCJ0824S12
	15.0 V	0.535 A	15 mA	0.40 A	220 μ F	84%	JCJ0824S15
	± 5.0 V	± 0.800 A	15 mA	0.41 A	± 1000 μ F	82%	JCJ0824D05
	± 12.0 V	± 0.335 A	15 mA	0.40 A	± 220 μ F	83%	JCJ0824D12
36-75 V	3.3 V	2.000 A	15 mA	0.17 A	3300 μ F	80%	JCJ0848S3V3
	5.0 V	1.500 A	15 mA	0.19 A	2200 μ F	82%	JCJ0848S05
	12.0 V	0.665 A	15 mA	0.20 A	470 μ F	84%	JCJ0848S12
	15.0 V	0.535 A	15 mA	0.20 A	220 μ F	84%	JCJ0848S15
	± 5.0 V	± 0.800 A	15 mA	0.20 A	± 1000 μ F	82%	JCJ0848D05
	± 12.0 V	± 0.335 A	15 mA	0.20 A	± 220 μ F	85%	JCJ0848D12
9-18 V	2.5 V	3.000 A	10 mA	0.79 A	2200 μ F	81%	JCJ1012S2V5
	3.3 V	3.000 A	10 mA	1.01 A	2200 μ F	84%	JCJ1012S3V3
	5.0 V	2.000 A	10 mA	0.99 A	2200 μ F	86%	JCJ1012S05
	12.0 V	0.833 A	10 mA	0.98 A	820 μ F	87%	JCJ1012S12
	15.0 V	0.667 A	10 mA	0.96 A	470 μ F	89%	JCJ1012S15
	± 12.0 V	± 0.416 A	10 mA	0.98 A	± 220 μ F	87%	JCJ1012D12
18-36 V	2.5 V	3.000 A	10 mA	0.38 A	2200 μ F	84%	JCJ1024S2V5
	3.3 V	3.000 A	10 mA	0.50 A	2200 μ F	85%	JCJ1024S3V3
	5.0 V	2.000 A	10 mA	0.48 A	2200 μ F	89%	JCJ1024S05
	12.0 V	0.833 A	10 mA	0.49 A	820 μ F	88%	JCJ1024S12
	15.0 V	0.667 A	10 mA	0.49 A	470 μ F	88%	JCJ1024S15
	± 12.0 V	± 0.416 A	10 mA	0.49 A	± 220 μ F	88%	JCJ1024D12
36-75 V	2.5 V	3.000 A	10 mA	0.19 A	2200 μ F	84%	JCJ1048S2V5
	3.3 V	3.000 A	10 mA	0.25 A	2200 μ F	85%	JCJ1048S3V3
	5.0 V	2.000 A	10 mA	0.24 A	2200 μ F	88%	JCJ1048S05
	12.0 V	0.833 A	10 mA	0.25 A	820 μ F	87%	JCJ1048S12
	15.0 V	0.667 A	10 mA	0.24 A	470 μ F	88%	JCJ1048S15
	± 12.0 V	± 0.416 A	10 mA	0.25 A	± 220 μ F	87%	JCJ1048D12

Notes

1. Input current measured at nominal input voltage.
2. From 10% to 100% load.
3. When one output is set at 100% load and the other varied between 25% and 100% load
4. Measured with 20 MHz bandwidth and 1 μ F ceramic capacitor across output rails.
5. A 220 μ F/100 V capacitor across the input is required to meet EN61000-4-4 and EN61000-4-5

Mechanical Details and Application Note

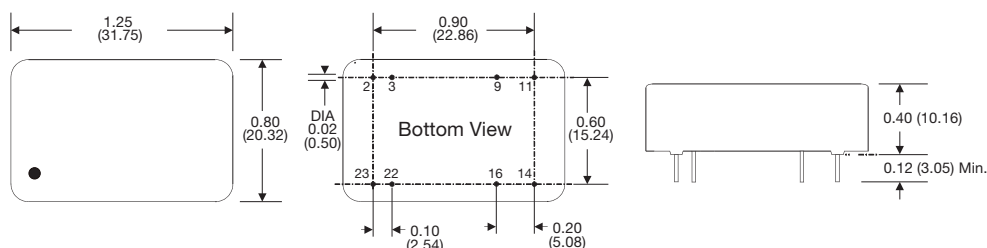

Pin Connections					
Pin	Single	Dual	Pin	Single	Dual
2	-Vin	-Vin	14	+Vout	+Vout
3	-Vin	-Vin	16	-Vout	Common
9	No Pin	Common	22	+Vin	+Vin
11	N.C.	-Vout	23	+Vin	+Vin

Notes

1. All dimensions are in inches (mm)
2. Weight: 0.04 lbs (17 g) approx.
3. Pin pitch and length tolerance: ± 0.014 (± 0.35)
4. Pin diameter tolerance: 0.02 ± 0.002 (0.5 ± 0.05)
5. Case tolerance: ± 0.02 (± 0.5)
6. Package: 24 in DIL nickel-coated copper.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters - Through Hole](#) ***category:***

Click to view products by [XP Power](#) ***manufacturer:***

Other Similar products are found below :

[F0505XT-2WR2](#) [F1515XT-2WR3](#) [WRF0505S-3WR2](#) [K7815M-1000R3](#) [B1215S-3WR2](#) [R-78E3.3-0.5](#) [K7812M-1000R3](#) [B0509XT-1WR3](#)
[B0524XT-1WR3](#) [B1203XT-1WR3](#) [B1524S-3WR2](#) [B2424S-3WR2](#) [F0524D-2WR2](#) [B1212S-1W](#) [A1215S-2WR3](#) [F1205XT-1WR3](#) [F0303XT-1WR3](#) [F0505D-1WR2](#) [K7805-500](#) [B0305S-1W](#) [F0509XT-1WR3](#) [F2424XT-1WR3](#) [K7812-500R3](#) [G2415S-2WR3](#) [B2424LS-1WR3](#) [F1212S-3WR2](#) [R-78E12-0.5](#) [K7805M-1000R3](#) [B1224XT-1WR3](#) [H1205S-2WR2](#) [K7812-1000R3](#) [B1515S-2WR3](#) [B0505XT-2WR3](#) [F2424XT-2WR3](#)
[B0505S-1WL](#) [F0505D-1WR3](#) [F1224D-2WR3](#) [B1205S-2W](#) [A2405S-1WR3](#) [B2415S-3WR2](#) [R-78E5.0-0.5](#) [R-78E9.0-0.5](#) [B1515S-3WR2](#)
[F1205XT-2WR3](#) [B2424XT-1WR3](#) [B0503XT-2WR2](#) [B1505S-3WR2](#) [B1212XT-1WR3](#) [PXD60-48WD24](#) [PXD40-48WS3P3](#)