



Great Compatibility

Apply to 3.6V/3.7V Li-ion/IMR/INR/ICR:
14500/14650/16340/17335/17500/17670/
18350/18490/18500/18650/18700/20700/
21700/22650/25500/26650
1.2V Ni-MH/Ni-CD:
AAAA/AAA/AA/A/SC/C

Note: Cannot charge protected 20700/21700 batteries

Innovative LCD Screen Display

Shows All Information You Want (battery power percentage, battery voltage, charge current, battery charged capacity)

By knowing the charging capacity, you can know the real status of your batteries





Quick Charge Time

Fully charges a 18650 2500mAh battery in 1.5hrs with real 2A charge current

※The data is tested in laboratory environment, only for reference. Actual charging time may differ from the status of the battery and the using environment

Two Input Ports, Charge Anytime and Anywhere

You can use the power cord to power the charger via AC input port when you are indoors; when you are outdoors or on journey, you can use the Micro USB port. Shares one adapter with your phone, cost-effective and eco-friendly





0V Activation Function

Most batteries we discarded are over-discharged batteries, and 0V Activation Function brings them back to life. Originally invented by Shenzhen XTAR Electronics Co., Ltd, this technology has been followed-up by other companies. We are extremely honored to improve the overall level of the industry



TC-CC-CV Three-Stage Charging

This charger regulates the voltage and current delivered to the batteries in three automatic stages, to ensure batteries receive optimum charging with minimal wear and tear





Soft Start

When start charging the batteries, this charger will increase the output current slowly to protect the batteries

6 Protections, 3 Certificates, 2 Insurances

RoHS **FC** **CE**



Reverse polarity
protection



Short circuit
protection



Temperature
monitoring



CPIC Product
Insurance



Flame retardant
material



1 year
warranty



Over-discharge
protection





Over heat
protection



Over-charge
protection

X2 Specifications

Model	X2
Input	100-240V~ 50/60Hz 0.4A DC 5V 2.1A
Constant Current	2Ax1/1Ax2/0.5Ax2
Cut-Off Voltage	4.20 ± 0.05V/ 1.45±0.1V
Net Weight	125g
Size	L135*W75*H38mm
Operating Temperature	0-40°C

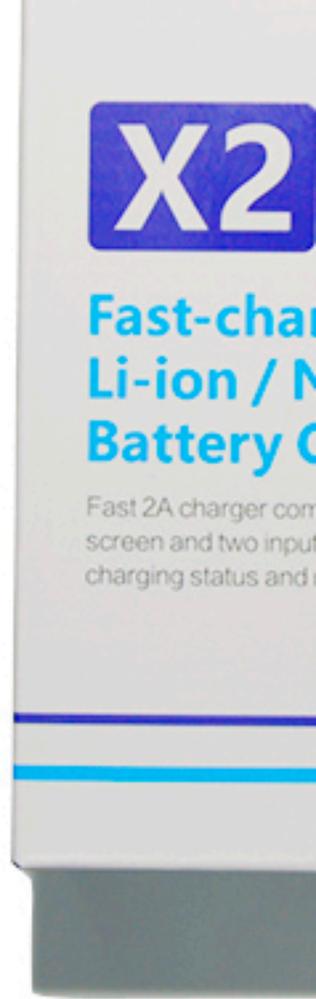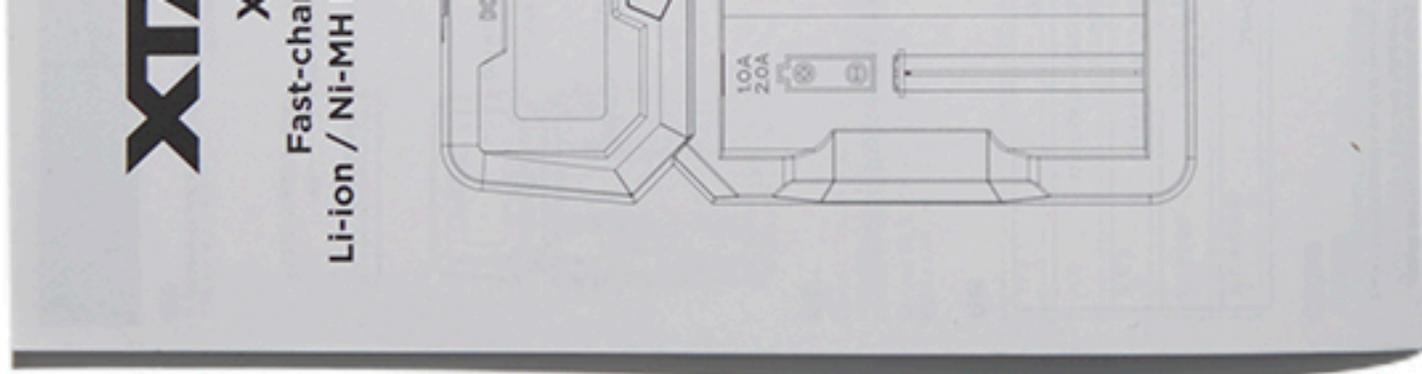

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Battery Chargers](#) category:

Click to view products by [Xtar](#) manufacturer:

Other Similar products are found below :

[149116](#) [2217331-1](#) [CA0002](#) [CH0011](#) [CB1210A](#) [PS-034052](#) [CH0015](#) [GP U811+ 4X R6 2100MAH](#) [GP X411 AA/AAA + 4X R6 2700MAH](#)
[RECYKO](#) [CB243A](#) [CB123A](#) [CB1235A](#) [CB2420A](#) [CB12245A](#) [HEP-600C-48](#) [MC1 PLUS NEW](#) [MC2](#) [MC1](#) [BQ-CC55E](#) [VP4 PLUS](#)
[DRAGON](#) [LCD MULTI CHARGER](#) [MINI-CHARGER](#) [5V 2.1A](#) [PB320](#) [PB50](#) [PB550 + 4XAA 2700MAH](#) [VP2](#) [POCKET-CHARGER +](#)
[4XAA 2100MAH](#) [PB-300P-12](#) [VC2](#) [79540-5015](#) [MINI CHARGER + 2XAA 2100MAH](#) [ENC-360-12](#) [ENC-360-24](#) [ENC-360-48](#) [HEP-600C-](#)
[12](#) [HEP-600C-24](#) [CHFC3](#) [ENC-120-12](#) [RCP-1600-24](#) [68532-4461](#) [153117](#) [BVL240600003N](#) [68532-4462](#) [BC7217 120](#) [BVL062000003N](#)
[68532-4510](#) [PB-120P-54P](#) [TSP-BCM48](#) [1073100064-001](#)