

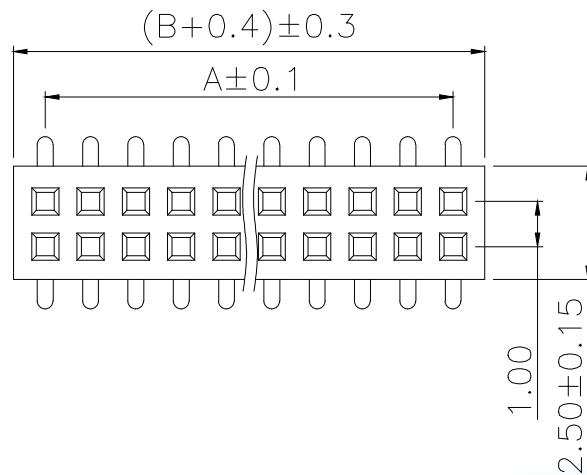


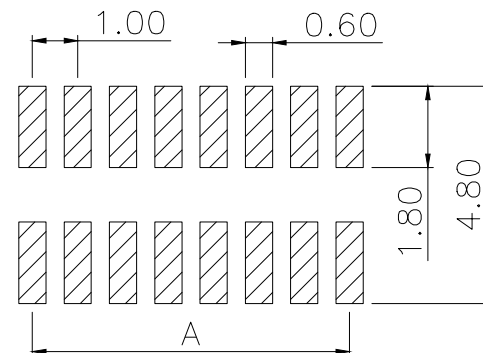

SPECIFICATIONS

Current Rating: 0.75 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operation Temperature: -40°C to $+105^{\circ}\text{C}$
Insulator Material: Polyester (UL94V-0)
Contact Material: Phosphor bronze
Standard: PA6T
Contact Plating: Gold Flash
Max. Processing Temp: 240°C for 30-60 seconds
(260°C for 5 seconds)

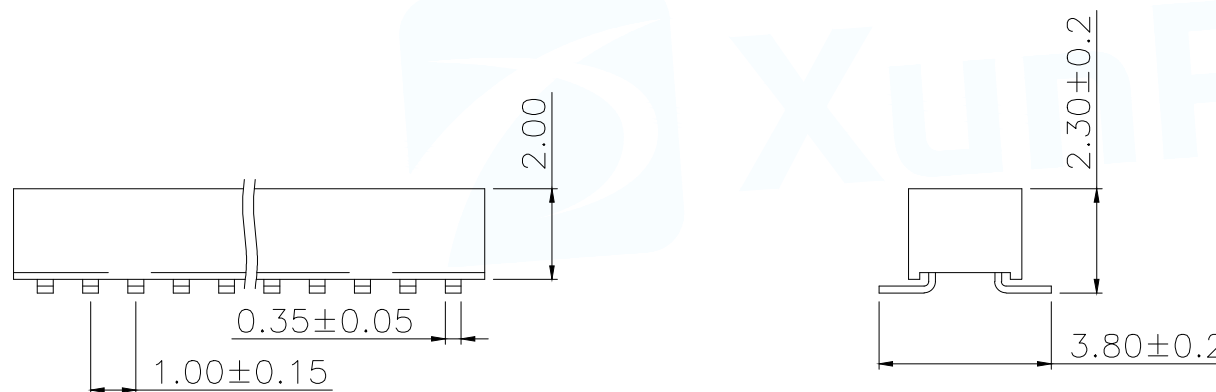

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ± 0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
FH1.0-02-01PWS	2*1	0.00	1.00
FH1.0-02-02PWS	2*2	1.00	2.00
FH1.0-02-03PWS	2*3	2.00	3.00
FH1.0-02-04PWS	2*4	3.00	4.00
FH1.0-02-05PWS	2*5	4.00	5.00
FH1.0-02-06PWS	2*6	5.00	6.00
FH1.0-02-07PWS	2*7	6.00	7.00
FH1.0-02-08PWS	2*8	7.00	8.00
FH1.0-02-09PWS	2*9	8.00	9.00
.....			
FH1.0-02-40PWS	2*40	(PIN-1)	(PIN)

PART NUMBER DESCRIPTION:

FH1.0-02-NPWS

(D=单排; S=双排)
(Z=直脚; W=弯脚)
(PIN数量; 01.....40PIN)
(排针开关)

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 1.0FH H2.0 2xNPIN SMT W2.5 U型 PC3.8 PB2.3 6T
			PAR FH1.0-02-NPWS
			DWN
			CHKD
DECIMALS:	ANGLES:		APVD
X.±0.30	X°±5'		SCALE N:A
X.X±0.20	X.X'±1"		UNIT:MM
X.XX±0.10	X.XX'±0.5"		SIZE:A4
CUSTOMER COPY		SIZE:A4	SHEET:1F1
			REV:A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XUNPU](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)