ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

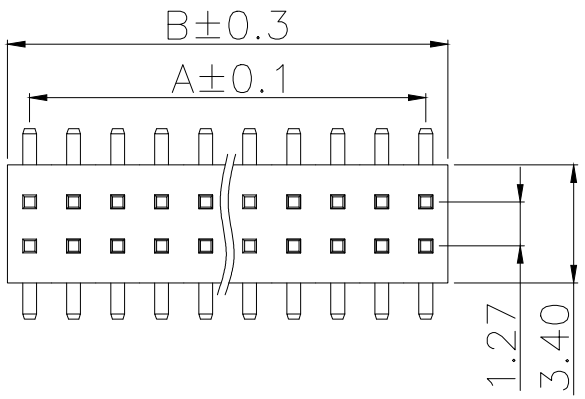

SPECIFICATIONS
Current Rating:1.0 Amps
Withstanding Voltage:AC 500V
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Operation Temperature:−40° to+105°
Insrlator Material:Polyester(UL94V−0)
Contact Material:Brass
Standard:PA6T
Contact Plating:Gold Flash
Max.Processing Temp: 240°C for30−60seconds
(260°C for5seconds)

P/N	PIN	DIM.A	DIM.B
PH1.27−02−01PWS	2*1	0.00	1.27
PH1.27−02−02PWS	2*2	1.27	2.54
PH1.27−02−03PWS	2*3	2.54	3.81
PH1.27−02−04PWS	2*4	3.81	5.08
PH1.27−02−05PWS	2*5	5.08	6.35
PH1.27−02−06PWS	2*6	6.35	7.62
PH1.27−02−07PWS	2*7	7.62	8.89
PH1.27−02−08PWS	2*8	8.89	10.16
PH1.27−02−09PWS	2*9	10.16	11.43
.....	.....	.....	.....
PH1.27−02−50PWS	2*50	(PIN−1)x1.27	(PIN)x1.27

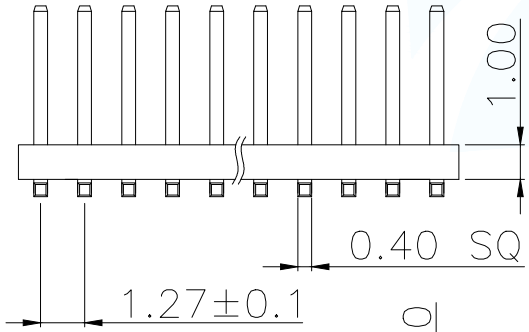

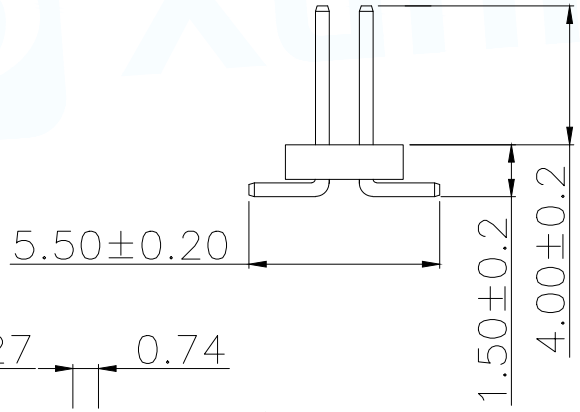

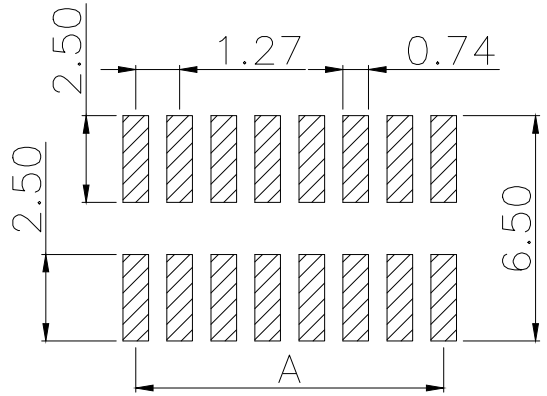

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

PART NUMBER DESCRIPTION:

PH1.27−02−NPWS

- (D＝单排;S＝双排)
- (Z＝直脚;W＝弯脚)
- (PIN数量;01.....50PIN)
- (排针开关)

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE:1.27PH H1.0 2xnPin SMT W3.4 PC5.5 PA4.0 PB1.5 L7.2 6T		
		PAR	PH1.27−02−NPWS	
		DWN		
DECIMALS:	ANGLES:	CHKD		
X.±0.30	X°±5°	APVD		
X.X±0.25	X.X°±1°	SCALE N:A	UNIT:MM	
X.XX±0.20	X.XX°±0.5°	CUSTOMER COPY	SIZE:A4	SHEET:1F1 REV:A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings ***category:***

Click to view products by XUNPU ***manufacturer:***

Other Similar products are found below :

892-18-020-10-001101 0010894062 0010977306 0015477636 0015917161 0022104068 0022121042 0022155065 0022281023 57102-F02-18ULF PCN6B-10P-2.5DS 58102-G61-06LF 582553-1 0015911208 01.001.5753.1 0022285048 0050291907 02.125.8002.8 CSU011177004 622-0430 63453-116 636-1030 636-1427 636-3427 636-4007 641938-9 65495-038 65692-001LF 65781-018 65781-047 65817-010LF 67095-007LF 67601157 68631-112 68645-018 699319-000 70.362.1628.0 70-4210 70-4226B 70-4853B 707-5028 71.350.2428.0 733-134 733-162 760-3052 80.063.4001.1 800-90-001-10-001000 801-43-002-10-013000 801-43-006-10-002000 803-43-024-10-001000