
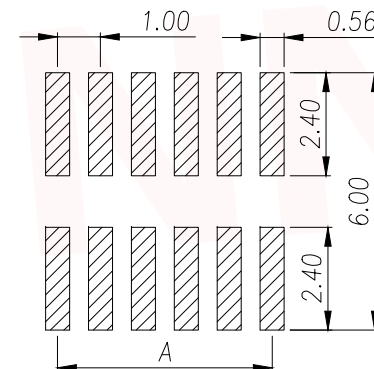

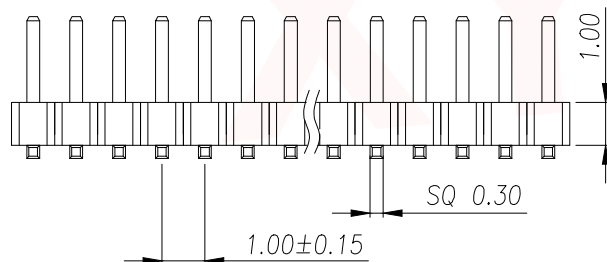


SPECIFICATIONS

Current Rating: 0.75 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operation Temperature: -40° to +105°
Insulator Material: Polyester (UL94V-0)
Contact Material: Brass
Standard: PA6T
Contact Plating: Gold Flash
Max. Processing Temp: 240°C for 30-60 seconds
(260°C for 5 seconds)

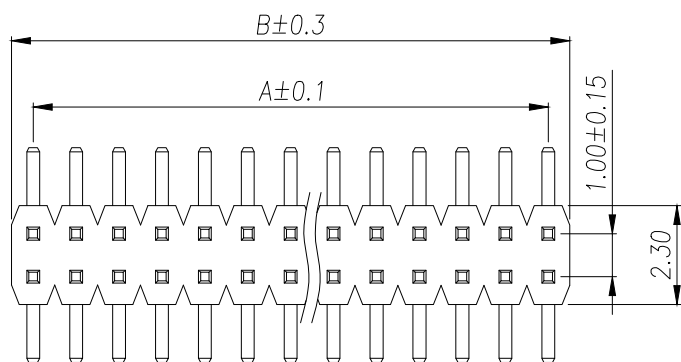

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

Part No	Pin	A	B	Part No	Pin	A	B	Part No	Pin	A	B	Part No	Pin	A	B
PZ1.0-US2S-1A	1	0.00	1.00	PZ1.0-US2S-11A	11	10.00	11.00	PZ1.0-US2S-21A	21	20.00	21.00	PZ1.0-US2S-31A	31	30.00	31.00
PZ1.0-US2S-2A	2	1.00	2.00	PZ1.0-US2S-12A	12	11.00	12.00	PZ1.0-US2S-22A	22	21.00	22.00	PZ1.0-US2S-32A	32	31.00	32.00
PZ1.0-US2S-3A	3	2.00	3.00	PZ1.0-US2S-13A	13	12.00	13.00	PZ1.0-US2S-23A	23	22.00	23.00	PZ1.0-US2S-33A	33	32.00	33.00
PZ1.0-US2S-4A	4	3.00	4.00	PZ1.0-US2S-14A	14	13.00	14.00	PZ1.0-US2S-24A	24	23.00	24.00	PZ1.0-US2S-34A	34	33.00	34.00
PZ1.0-US2S-5A	5	4.00	5.00	PZ1.0-US2S-15A	15	14.00	15.00	PZ1.0-US2S-25A	25	24.00	25.00	PZ1.0-US2S-35A	35	34.00	35.00
PZ1.0-US2S-6A	6	5.00	6.00	PZ1.0-US2S-16A	16	15.00	16.00	PZ1.0-US2S-26A	26	25.00	26.00	PZ1.0-US2S-36A	36	35.00	36.00
PZ1.0-US2S-7A	7	6.00	7.00	PZ1.0-US2S-17A	17	16.00	17.00	PZ1.0-US2S-27A	27	26.00	27.00	PZ1.0-US2S-37A	37	36.00	37.00
PZ1.0-US2S-8A	8	7.00	8.00	PZ1.0-US2S-18A	18	17.00	18.00	PZ1.0-US2S-28A	28	27.00	28.00	PZ1.0-US2S-38A	38	37.00	38.00
PZ1.0-US2S-9A	9	8.00	9.00	PZ1.0-US2S-19A	19	18.00	19.00	PZ1.0-US2S-29A	29	28.00	29.00	PZ1.0-US2S-39A	39	38.00	39.00
PZ1.0-US2S-10A	10	9.00	10.00	PZ1.0-US2S-20A	20	19.00	20.00	PZ1.0-US2S-30A	30	29.00	30.00	PZ1.0-US2S-50A	50	49.00	50.00

DIMENSION IN mm		厦门市辛译精密电子有限公司 Xiamen XinYi Xyconn Electronics Co.,Ltd				
TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X±0.35	X.*± 5°	APR. Alex	TITLE: 1.0PZ H1.0 2xnPin SMT W2.3 PC5.0 PA2.0 PB1.4 L5.0 6T			
.XX±0.25	.X*± 3°	CHK. Jack	DWG NO. PZ1.0-US2S-NA			
.XXX±0.15	.XX*± 1°	DRA. Can	PROJ. 		CUSTOMER DRAWING	
			SIZE A4	SCALE 1:1	SHEET 1/1	REV. A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [XYECONN](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-4007](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#) [67095-007LF](#)
[67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#)
[8-1437020-4](#) [819-22-004-30-001101](#)