

DATA SHEET

GAS DISCHARGE TUBES TELEPHONE INTERFACE

2R-5-SST4.2 series

RoHS compliant & free



Product specification— February 02, 2021 V.1



Gas Discharge Tube (GDT) Data Sheet

Features


- Provide ultra-fast response to surge voltage from slow-rising surge of 100V/s to rapid-rising surge of 1KV/μs
- Stable breakdown voltage
- High insulation resistance
- Low capacitance ($\leq 1\text{pF}$)
- High holdover voltage
- Large absorbing transient current capability
- Micro-Gap Design
- Size: 5.0mm*4.2mm
- Square ceramic tube for SMD
- Storage and operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Meets MSL level 1, per J-STD-020
- Safety certification: UL



Applications

- Repeaters, Modems
- Telephone Interface, Line cards
- Data communication equipment
- Line test equipment

Part Number Code

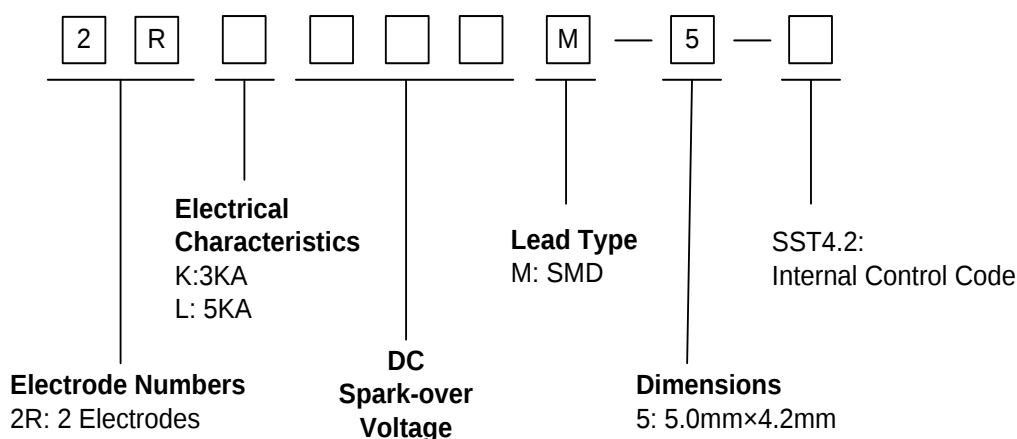

Dimensions


M Type	Symbol	Dimension (mm)	
		Spec.	Tolerance
Recommended Pad Size	D	5.0	±0.2
	T	4.2	±0.3
	B	0.5	±0.1

Electrical Characteristics

Part Number	Type ①	DC Spark-over Voltage	Maximum Impulse Spark-over Voltage	Nominal Impulse Discharge Current	Minimum Insulation Resistance		Maximum Capacitance	Device Marking Code
		100V/s	1000V/ μ s	8/20 μ s $\pm$ 5times	Test Voltage	(G Ω)	1MHz	
		(V)	(V)	(KA)	DC(V)		(pF)	
2RL075M-5	SST4.2	75 $\pm$ 20%	700	5.0	25	1.0	1.0	None
2RL090M-5	SST4.2	90 $\pm$ 20%	650	5.0	50	1.0	1.0	None
2RL120M-5	SST4.2	120 $\pm$ 20%	700	5.0	50	1.0	1.0	None
2RL150M-5	SST4.2	150 $\pm$ 20%	700	5.0	100	1.0	1.0	None
2RL230M-5	SST4.2	230 $\pm$ 20%	700	5.0	100	1.0	1.0	None
2RL250M-5	SST4.2	250 $\pm$ 20%	700	5.0	100	1.0	1.0	None
2RL300M-5	SST4.2	300 $\pm$ 20%	800	5.0	100	1.0	1.0	None
2RL350M-5	SST4.2	350 $\pm$ 20%	850	5.0	100	1.0	1.0	None
2RL400M-5	SST4.2	400 $\pm$ 20%	900	5.0	100	1.0	1.0	None
2RL470M-5	SST4.2	470 $\pm$ 20%	1000	5.0	250	1.0	1.0	None
2RL600M-5	SST4.2	600 $\pm$ 20%	1200	5.0	250	1.0	1.0	None
2RK800M-5	SST4.2	800 $\pm$ 20%	1600	3.0	250	1.0	1.0	None
2RK1000M-5	SST4.2	1000 $\pm$ 20%	1800	3.0	500	1.0	1.0	None

Notes: ① Specific code by request.


Electrical Ratings

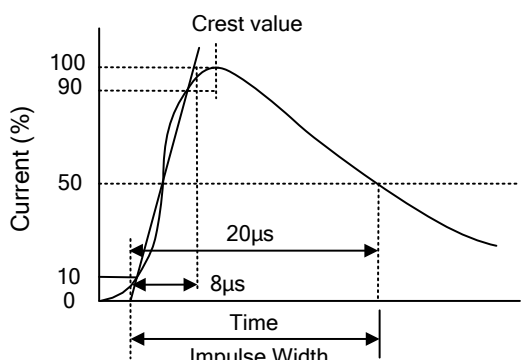Items	Test Condition/Description	Requirement
DC Spark-over Voltage	The voltage is measured with voltage ramp $dv/dt=100V/s$.	To meet the specified value
Maximum Impulse Spark-over Voltage	The maximum impulse spark-over voltage is measured with voltage ramp $dv/dt=1000V/\mu s$.	
Impulse Discharge Current	Maximum 8/20μs surge current that can be applied between two electrodes, 5 positive and 5 negative surges, with 3 minutes interval time. 	

Insulation Resistance	The resistance of gas tube shall be measured between two electrodes.	
Capacitance	The capacitance of gas tube shall be measured between two electrodes. Test frequency: 1MHz	

Recommended Soldering Conditions


Reflow Soldering

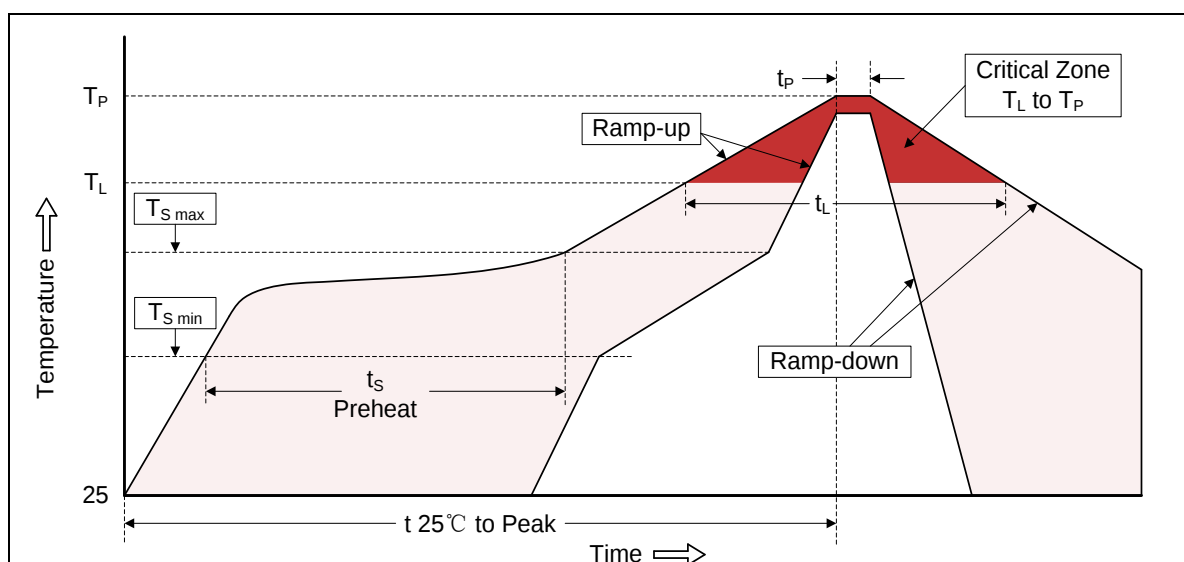

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat -Temperature Min ($T_{S\ min}$) -Temperature Max ($T_{S\ max}$) -Time (min to max) (t_s)	150°C 200°C 60-180 seconds
$T_{S\ max}$ to T_L -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_P)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.


Packaging

Tape

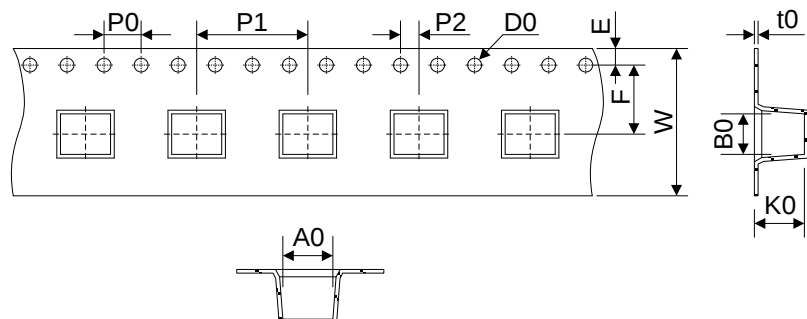

Symbol	Dimension (mm)	
	Spec.	Tolerance
W	16.00	±0.20
P0	4.00	±0.10
P1	12.00	±0.10
P2	2.00	±0.10
D0	1.55	±0.10
E	1.75	±0.10
F	7.50	±0.10
A0	5.30	±0.10
B0	4.50	±0.10
K0	5.40	±0.10
t0	0.40	±0.10
D	330.00	±2.00
d	13.00	±0.50
L	20.00	±2.00
t	2.00	±0.20
Quantity: 800pcs		

Reel

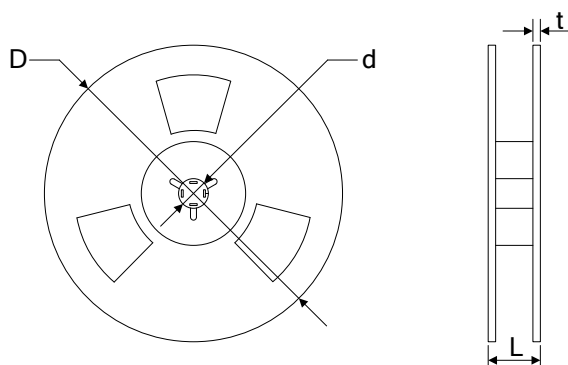

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Gas Discharge Tubes - GDTs / Gas Plasma Arrestors](#) **category:**

Click to view products by [Yageo](#) **manufacturer:**

Other Similar products are found below :

[PMT1023004](#) [PMT1025001](#) [PMT1035004](#) [PMT1040004](#) [PMT809006](#) [GT-SMD181240012-TR](#) [WPGT-2R470B6L](#) [WPGT-2N90B6L](#)
[B88069X6940B152](#) [V50-1+NPE+FS-280](#) [V-PV-T1+2-1000](#) [V20-1+NPE-280](#) [V20-3+NPE+FS-280](#) [FRD 5 HF](#) [FRD 24 HF](#) [FLD 24](#) [FRD 2-](#)
[24](#) [A9L08500](#) [C50-0-255](#) [VF24-AC/DC](#) [SG24PA300](#) [A9L40500](#) [A9L40600](#) [LY82R2500K](#) [LY82R3000K](#) [B88069X4693T602](#) [OVR T2-T3](#)
[1N 20-275 P TS QS](#) [OVR T1-T2 12.5-275S P QS](#) [OVR T2-T3 3L 20-275 P QS](#) [OVR T2 4L 40-275 P QS](#) [OVR T2 1N 40-275 P QS](#) [OVR T2-](#)
[T3 1N 20-275 P QS](#) [OVR T2 40-275 P TS QS](#) [OVR T1-T2 4L 12.5-275S P TS QS](#) [OVR T2-T3 3N 20-275 P QS](#) [2RS800L-8](#) [2RH2500L-8-](#)
[AC1500/B](#) [2RK2500L-5S7.5/B](#) [2RL600M-6-S](#) [B32-200-LF-H2.5](#) [2RL230M-5-SS](#) [2RP600M-8-S](#) [B32-200-LF](#) [R5000](#) [BF801M](#) [2RC3600L-](#)
[8](#) [2R230SM-G](#) [2R090SM-EH](#) [3R090LM-5S](#) [BX151N](#)