


ESD Protection Diode

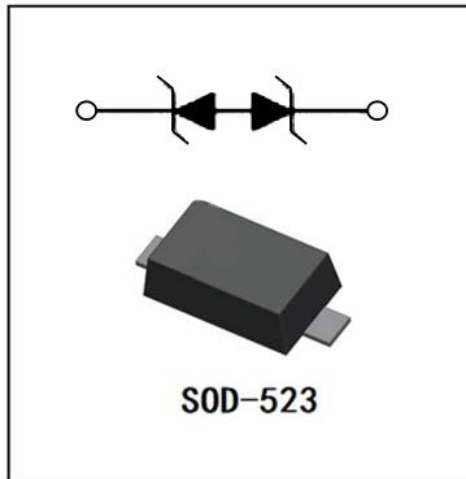

Features

- For sensitive ESD protection
- Low leakage
- Bi-directional ESD protection of one line
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Mechanical Data

- **Package:** SOD523
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** See Bellow




Maximum Ratings

PARAMETER	SYMBOL	LIMITS	UNIT
Operating Junction & Storage Temperature	T_J & T_{STG}	-45 to +125	$^{\circ}C$
IEC61000-4-2(ESD)Air	V_{ESD}	± 30	KV
IEC61000-4-2(ESD)Contact		± 30	KV
JESD22-A114-B(ESD)Machine		± 0.4	KV
JESD22-A114-B(ESD)Human Body		± 16	KV
Peak Pulse Current	$I_{PP}^{(1)}$	8	A

(1).Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5.

Electrical Parameter

PARAMETER	SYMBOL
Clamping Voltage@ I_{PP}	V_C
Breakdown Voltage@ I_T	V_{BR}
Peak Pulse Current	I_{PP}
Test Current	I_T
Reverse Leakage Current@ V_{RWM}	I_R
Reverse Standoff Voltage	V_{RWM}
Peak Power Dissipation	P_{PK}
Max. Capacitance @ $V_R=0$ and $f=1MHz$	C

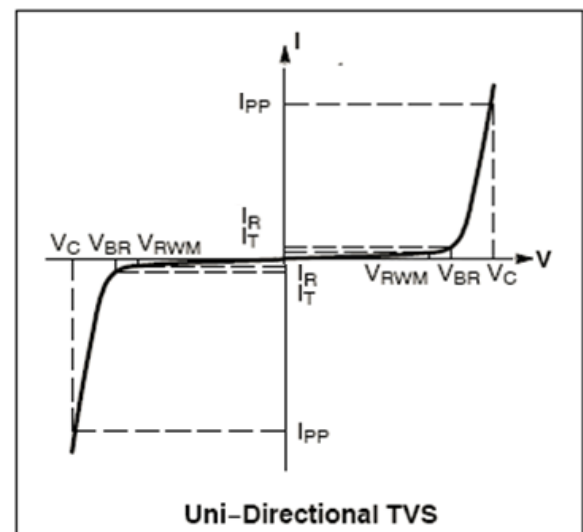



ESD3V3D5B

■Electrical Characteristics (T_A=25°C Unless otherwise specified)

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse Standoff Voltage	V _{RWM} ⁽¹⁾	V				3.3
Reverse Leakage Current	I _R	uA	V _{RWM} =3.3V			0.5
Breakdown Voltage	V _(BR)	V	I _T =1mA	3.6		5.0
Clamping voltage	V _C ⁽²⁾	V	I _{PP} = 16A, t _p = 100ns		11	
Clamping voltage	V _C ⁽³⁾	V	V _{ESD} = 8kV		10	
Clamping Voltage	V _C ⁽⁴⁾	V	I _{PP} =1A			8
Clamping Voltage	V _C ⁽⁴⁾	V	I _{PP} =8A			11
Peak Power Dissipation	P _{Pk}	W	T _p =8/20us			88
Junction Capacitance	C _J	pF	V _R =0V,f=1MHz		15	

(1).Other voltages available upon request.

(2) TLP parameter: Z₀ = 50Ω, t_p = 100ns, t_r = 2ns, averaging window from 60ns to 80ns.

(3) Contact discharge mode, according to IEC61000-4-2.

(4).Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5

■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESD3V3D5B	F2	Approximate 0.002	8000	80000	320000	7" reel

■ Characteristics (Typical)

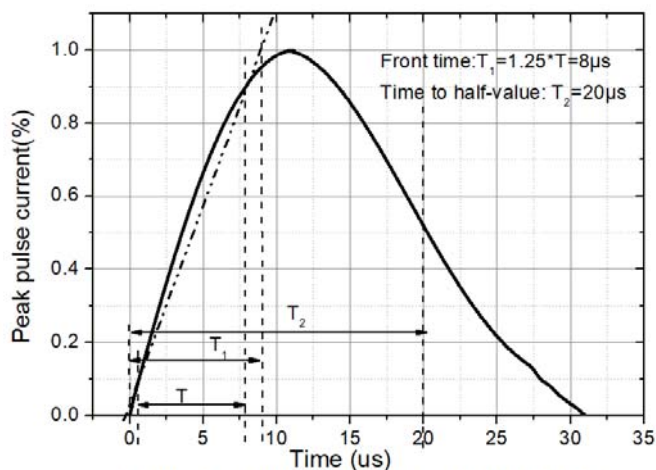


Figure 1. 8/20μs waveform per IEC61000-4-5

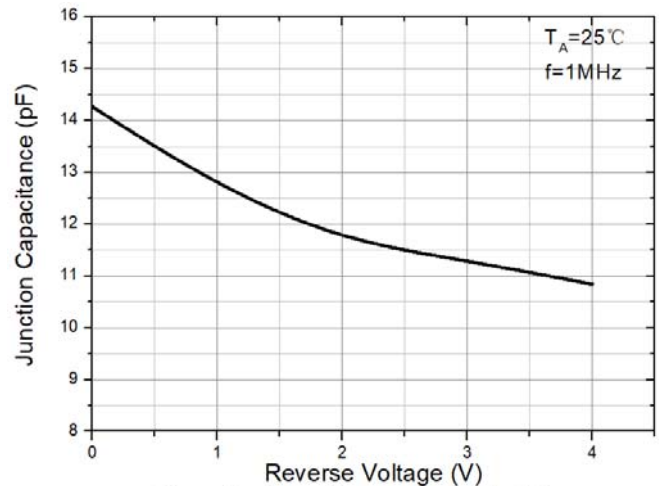


Figure2. Capacitance Characteristics

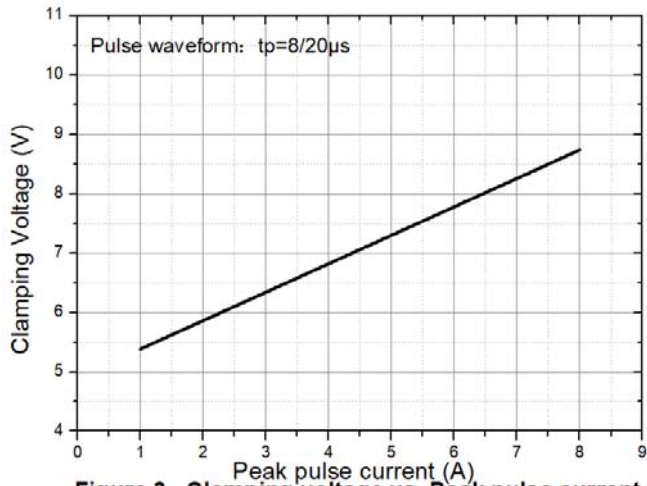


Figure 3. Clamping voltage vs. Peak pulse current

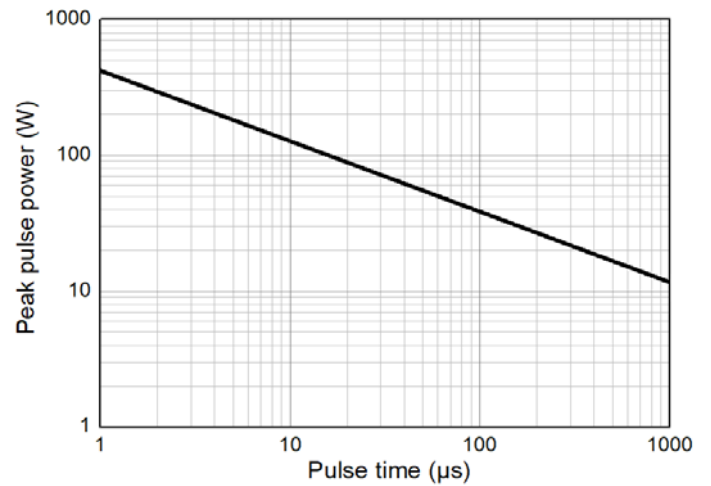


Figure 4 Non-repetitive peak pulse power vs. Pulse time

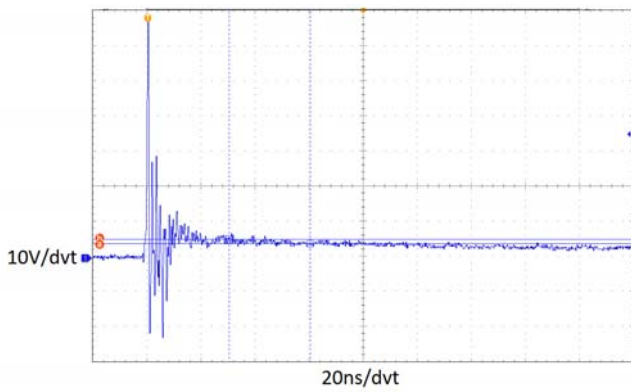


Figure 5. ESD clamping
(+8kV contact discharge per IEC61000-4-2)

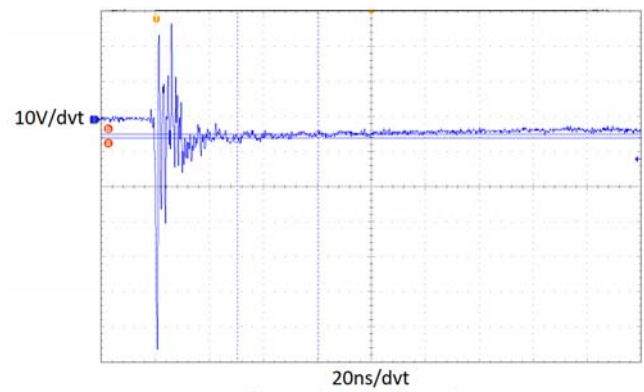


Figure 6. ESD clamping
(-8kV contact discharge per IEC61000-4-2)



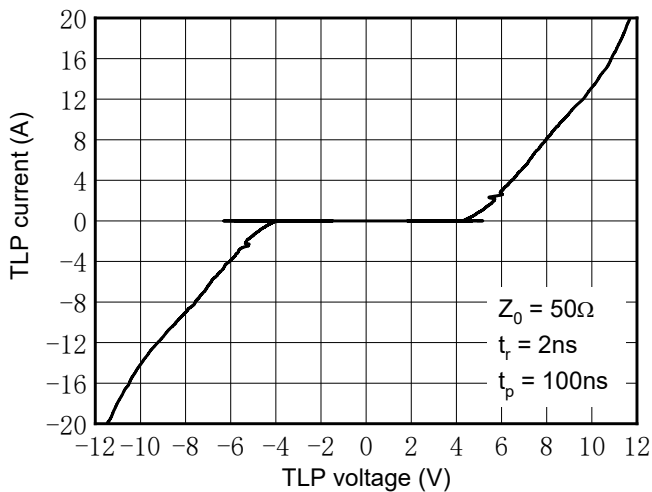


Figure 7. TLP Measurement

■ Outline Dimensions

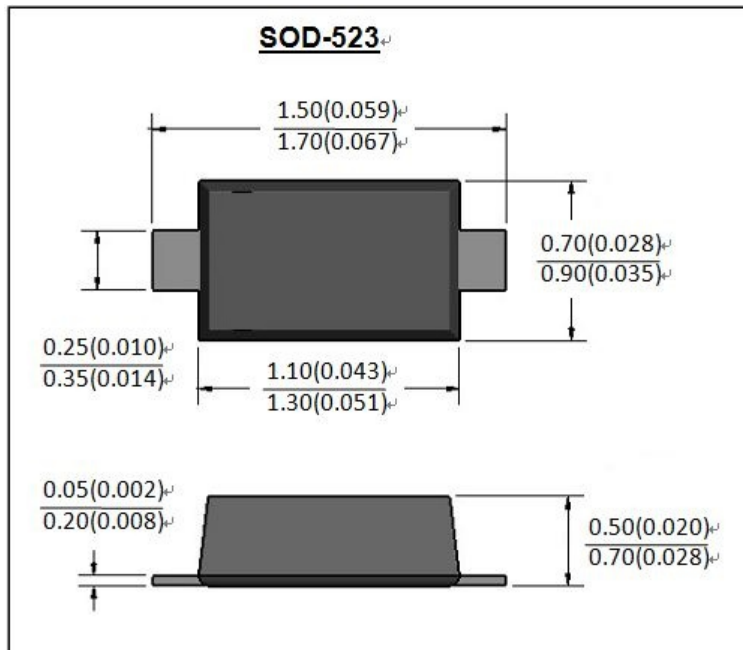

■ Soldering Footprint

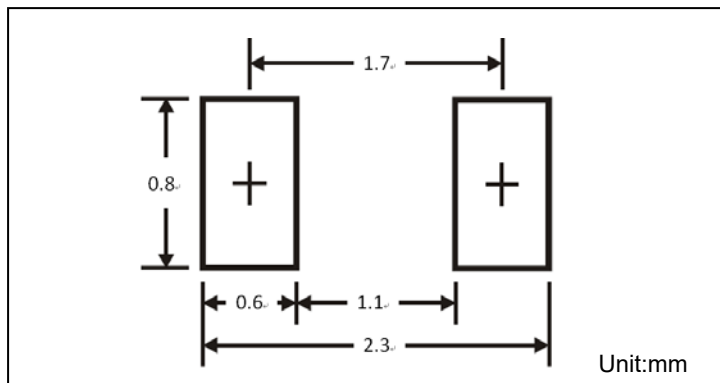



ESD3V3D5B

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) ***category:***

Click to view products by [Yangjie](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6053A](#) [SA60CA](#) [SA64CA](#)
[SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JAN1N6472](#) [JANTX1N6052A](#) [JANTX1N6462](#) [D3V3Q1B2DLP3-7](#)
[DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [ESD101-B1-02EL E6327](#) [AOZ8808DI-03](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE120A](#) [P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#)
[SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA5.0CA](#) [SA18A](#) [SA130A](#) [SA11CA](#) [SMLJ40CA-TP](#)