


■ Three-Terminal Positive Voltage Regulator



1.OUT
2.GND
3.IN

■ Features

- Maximum Output current I_o : 0.1A
- Output Voltage V_o : 10V
- Continuous Total Dissipation P_D : 0.5W ($T_a = 25^\circ\text{C}$)

■ Simplified outline(SOT-89)


■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	V_i	30	V
Operating Junction Temperature Range	T_{OPR}	-55 ~ +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

■ Electrical Characteristics ($V_i=17\text{V}$, $I_o=40\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$	9.6	10	10.4	V
		$T_J = 0\sim 125^\circ\text{C}$, $13\text{V} \leq V_i \leq 25\text{V}$, $I_o=1\text{mA} \sim 40\text{mA}$	9.5	10	10.5	V
		$T_J = 0\sim 125^\circ\text{C}$, $I_o=1\text{mA} \sim 70\text{mA}$	9.5	10	10.5	V
Load Regulation	ΔV_o	$T_J = 25^\circ\text{C}$, $I_o=1\text{mA} \sim 100\text{mA}$		20	90	mV
		$T_J = 25^\circ\text{C}$, $I_o=1\text{mA} \sim 40\text{mA}$		11	40	mV
Line Regulation	ΔV_o	$T_J = 25^\circ\text{C}$, $13\text{V} \leq V_i \leq 25\text{V}$		51	175	mV
		$T_J = 25^\circ\text{C}$, $14\text{V} \leq V_i \leq 25\text{V}$		42	125	mV
Quiescent Current	I_q	$T_J = 25^\circ\text{C}$		4.2	6.0	mA
Quiescent current Change	ΔI_q	$T_J = 0\sim 125^\circ\text{C}$, $14\text{V} \leq V_i \leq 25\text{V}$			1.5	mA
		$T_J = 0\sim 125^\circ\text{C}$, $1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	
Output Noise Voltage	V_N	$T_J = 25^\circ\text{C}$, $10\text{Hz} \leq f \leq 100\text{KHz}$		62		μV
Ripple Rejection	RR	$T_J = 0\sim 125^\circ\text{C}$, $15\text{V} \leq V_i \leq 25\text{V}$, $f = 120\text{Hz}$	37	44		dB
Dropout Voltage	V_D	$T_J = 25^\circ\text{C}$		1.7		V


■ Typical Application

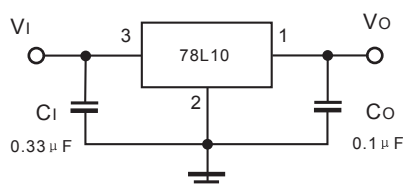

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Package Outline

SOT-89

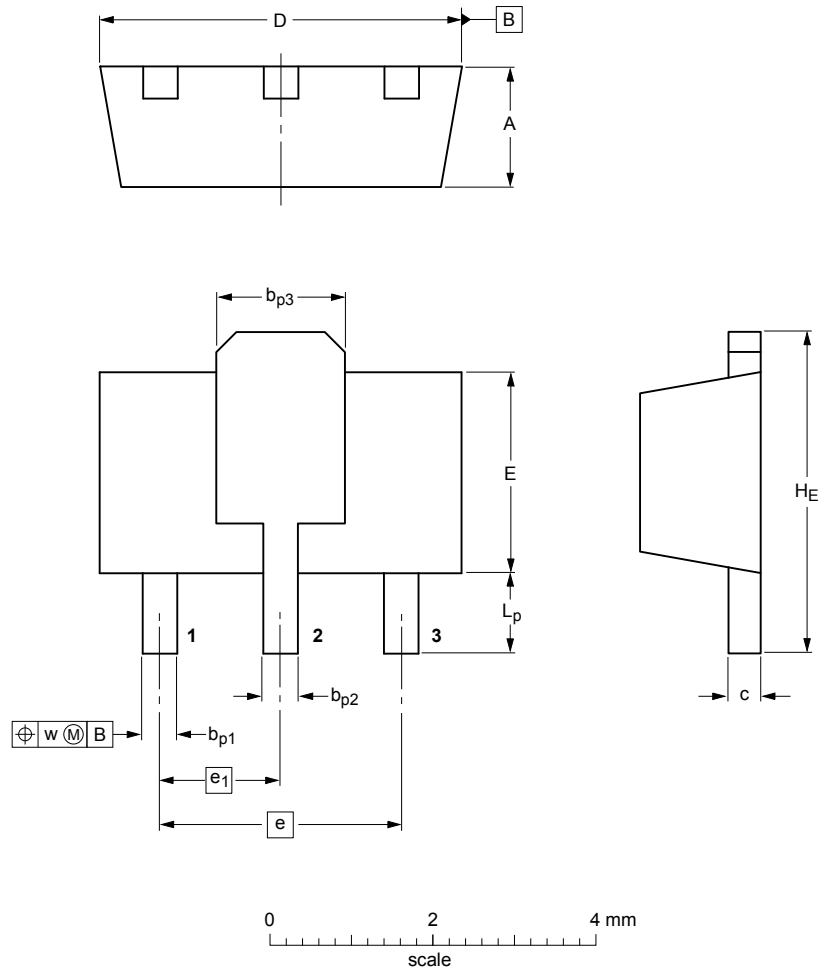

DIMENSIONS (mm are the original dimensions)

UNIT	A	b _{p1}	b _{p2}	b _{p3}	c	D	E	e	e ₁	H _E	L _p	w
mm	1.6 1.4	0.48 0.35	0.53 0.40	1.8 1.4	0.44 0.23	4.6 4.4	2.6 2.4	3.0	1.5	4.25 3.75	1.2 0.8	0.13

Summary of Packing Options

Package	Package Description	Packing Quantity	Industry Standard
SOT-89	Tape/Reel, 7" reel	1000	EIA-481-1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LDO Voltage Regulators](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[AP7363-SP-13](#) [NCV8664CST33T3G](#) [L79M05TL-E](#) [L9454](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TLF4949EJ](#) [L9708](#)
[L970813TR](#) [NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [NCV4269CPD50R2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#)
[NCP114BMX075TCG](#) [MC33269T-3.5G](#) [TLE4471GXT](#) [NCV4266-2CST33T3G](#) [NCP715SQ15T2G](#) [NCV8623MN-50R2G](#)
[NCV563SQ18T1G](#) [NCV8664CDT33RKG](#) [NCV4299CD250R2G](#) [NCP715MX30TBG](#) [NCV8702MX25TCG](#) [L974113TR](#) [TLE7270-2E](#)
[NCV562SQ25T1G](#) [NCP715MX53TBG](#) [AP2202K-2.6TRE1](#) [NCV8170BMX300TCG](#) [NCV8152MX300180TCG](#) [NCP700CMT45TBG](#)
[AP7315-33W5-7](#) [LD56100DPU28R](#) [NCP154MX180300TAG](#) [NJM2878F3-45-TE1](#) [S-1313D18-N4T1U4](#) [AP7343D-31FS4-7B](#) [AP7315D-](#)
[33FS4-7B](#) [LD59150PUR](#) [XC6215B3027R-G](#) [XC6216C201MR-G](#) [XC6504A2019R-G](#) [XC6504A2517R-G](#) [XC6504A251NR-G](#)
[XC6702D331ER-G](#) [NCP3334AMTADJTBG](#)