


**PNP Plastic-Encapsulate Transistors**

High Current Applications

**Features**

- High current output up to -2A.
- Complement to KTC3205

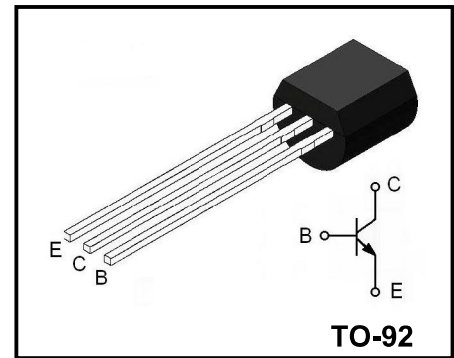

**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Value	Unit
Collector-Base Voltage	$BV_{CBO}$	-30	V
Collector-Emitter Voltage	$BV_{CEO}$	-30	V
Emitter-Base Voltage	$BV_{EBO}$	-5	V
Collector Current	$I_C$	-2	A
Collector Power Dissipation	$P_C$	0.625	W
Junction Temperature	$T_j$	150	°C
Storage Temperature	$T_{stg}$	-55~+150	°C


**Electrical Characteristics (Ta=25°C)**

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	$BV_{CBO}$	$I_C = -1mA, I_E = 0$	40			V
Collector-emitter breakdown voltage	$BV_{CEO}$	$I_C = -10mA, I_B = 0$	30			V
Emitter-base breakdown voltage	$BV_{EBO}$	$I_E = -1mA, I_C = 0$	5			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -30V, I_E = 0$			-100	nA
Emitter cut-off current	$I_{EBO}$	$V_{EB} = -5V, I_C = 0$			-100	nA
DC current gain	$h_{FE1}$	$V_{CE} = -2V, I_C = -500mA$	100		320	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -1.5A, I_B = -0.03A$			-2.0	V
Base -emitter saturation voltage	$V_{BE}$	$V_{CE} = -2V, I_C = -500mA$			-1.0	V
Transition frequency	$f_T$	$V_{CE} = -2V, I_C = -500mA$		120		MHz
Collector output capacitance	$C_{ob}$	$V_{CB} = -10V, I_E = 0, f = 1MHz$		48		pF


**$h_{FE}$  Classification**

Classification	KTA1273-O	KTA1273-Y
Range	100~200	160~320


**Typical Characteristics**

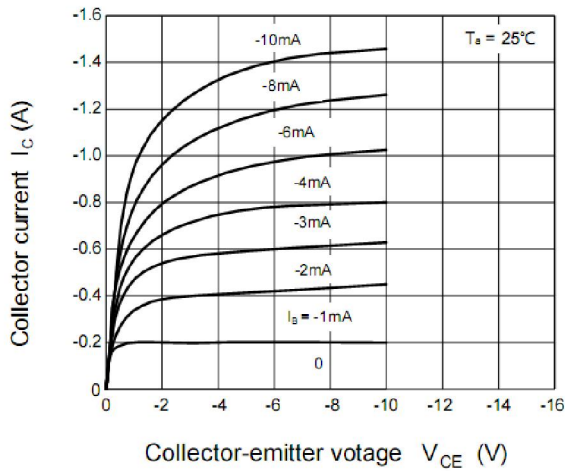


**Fig.1 Static characteristics**

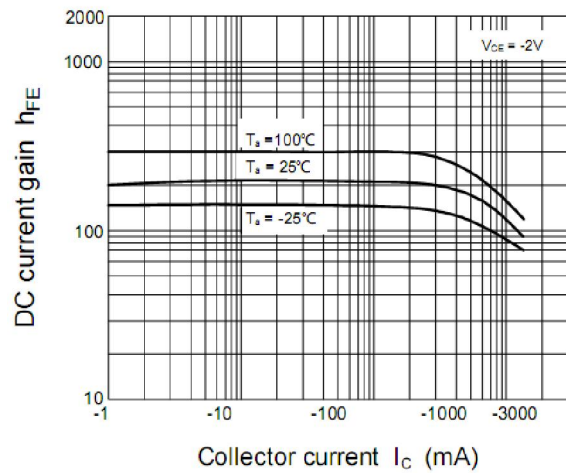


**Fig.2 DC Current Gain**

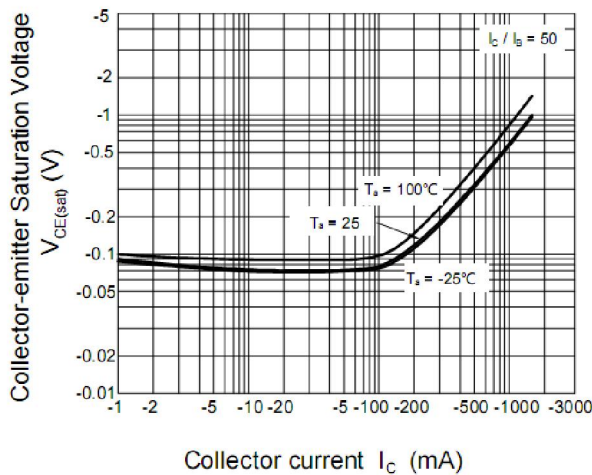


**Fig.3 Collector-emitter Saturation Voltage**

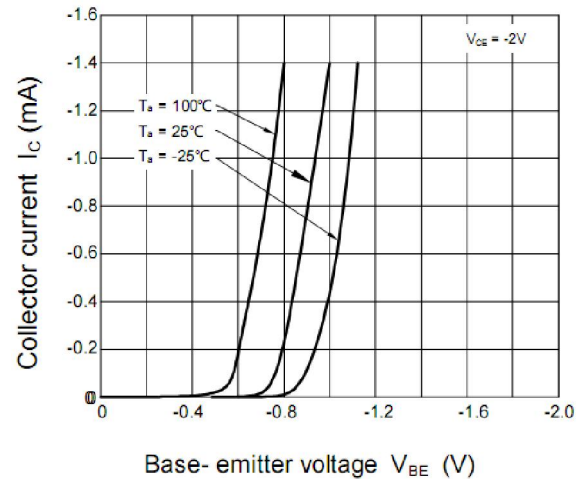

**Fig.4 Safe Operating Area**

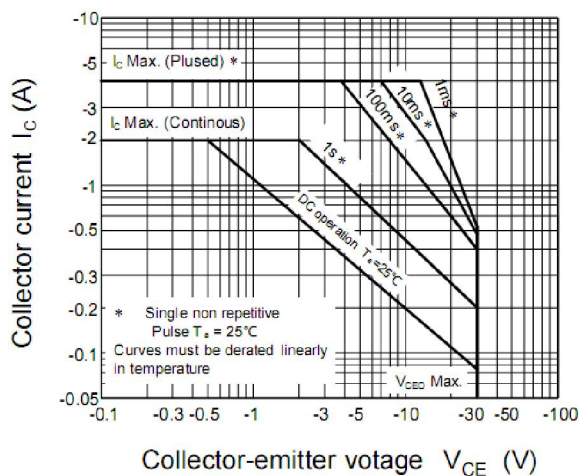

**Fig.5 Safe Operating Area**

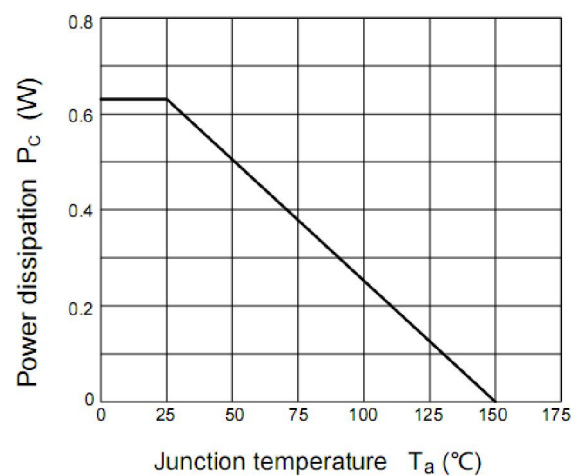

**Fig.6 Power Derating**

Package Dimensions

TO-92

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	3.30	3.70	0.130	0.146
A1	2.30	2.70	0.091	0.106
b	0.40	0.50	0.016	0.020
b1	0.50	0.70	0.020	0.028
c	0.35	0.45	0.014	0.018
D	4.45	4.70	0.175	0.185
E	4.40	4.65	0.173	0.183
e	1.17	1.37	0.046	0.054
e1	2.34	2.64	0.092	0.104
L	13.50	14.50	0.531	0.571
L1	1.80	2.20	0.071	0.087

Package	Packing Method	Pack Quantity
TO-92	Bulk	1000pcs/Bag
TO-92	Tape	2000pcs/Box

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [YFW Electronics manufacturer](#):*

Other Similar products are found below :

[MCH4017-TL-H](#) [MMBT-2369-TR](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [2N4401-A](#) [2N6728](#) [2SB1204S-TL-E](#) [2SC4731T-AY](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2SB1324-TD-E](#) [2SC5231C8-TL-E](#) [CPH6501-TL-E](#) [BULD128DT4](#) [CPH6021-TL-H](#) [MCH6102-TL-E](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE350](#) [NTE81](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [Jantxv2N3810](#) [2N6678](#) [2N2907Ae4](#) [2N3963](#) [50C02MH-TL-E](#) [Jantx2N5415](#) [CPH3123-TL-E](#) [SMBT35200MT1G](#) [SMMJT350T1G](#) [NSVDTA113EM3T5G](#) [MBT3904DW1T1H](#) [CPH6102-TL-E](#) [CPH3245-TL-E](#)