

FRED Super Fast Recovery Rectifiers

Reverse Voltage -600 V

Forward Current - 20A

FEATURES


- ◆The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆Construction utilizes void-free molded plastic technique
- ◆Low reverse leakage
- ◆High forward surge current capability
- 260°C/10seconds at terminals

MECHANICAL DATA

- ◆Case : Molded plastic body
- ◆Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- ◆Polarity : Polarity symbol marking on body
- ◆Mounting Position : Any

Primary Characteristic

I_(AV)	20A
V_{RRM}	600V
I_{FSM}	200A
V_F	1.45V
T_J Max	175°C

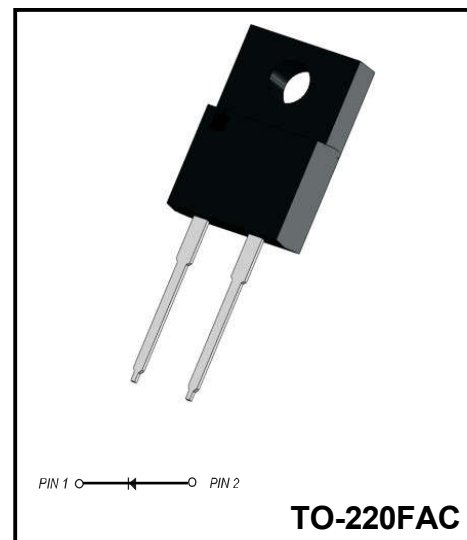

TO-220FAC

Maximum Ratings (Ta=25°C unless otherwise specified)

Parameter	Symbols	Value	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	600	V
Maximum RMS voltage	V_{RMS}	420	V
Maximum DC Blocking Voltage	V_{DC}	600	V
Maximum average forward rectified current at T _C =110 °C	I_(AV)	20	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave	I_{FSM}	200	A
Operating Temperature Range	T_J	-55 ~ +175	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C
Typical Thermal Resistance	R_{θJC}	4.0	°C/W

Electrical Characteristics (Ta=25°C unless otherwise specified)

Characteristics	Symbols	Value		Units
Maximum instantaneous forward voltage per diode at 20.0A	V_F	1.45	1.7	V
Maximum DC reverse current at rated DC blocking voltage	I_R	0.10	5	uA
		50	200	uA
Maximum reverse recovery time	T_{RR}	30	35	nS

Note: Reverse recovery time test condition: IF=0.5A IR=1.0A Irr=0.25A

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

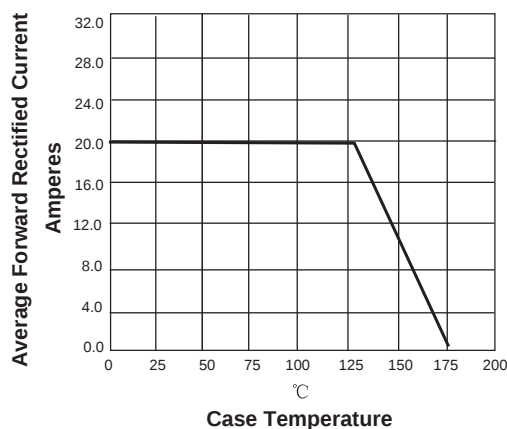


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

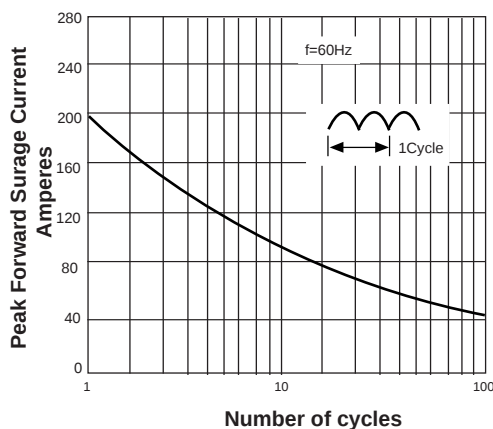


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS



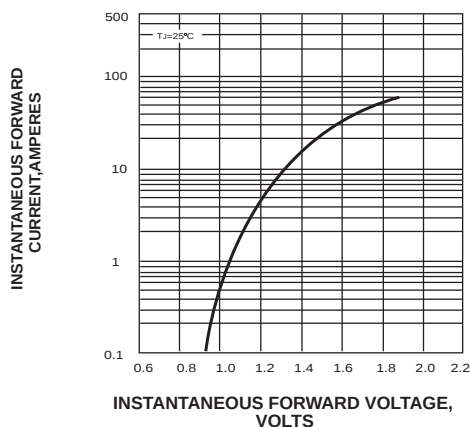


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

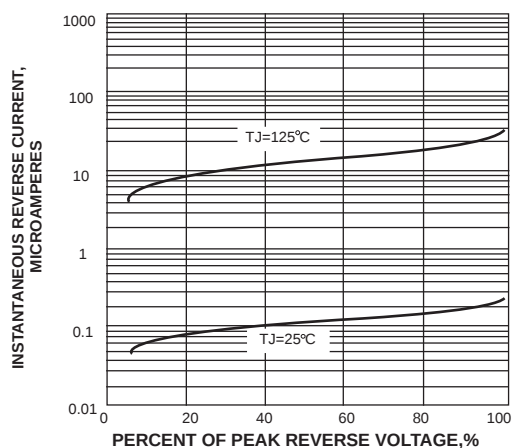

Marking on the body

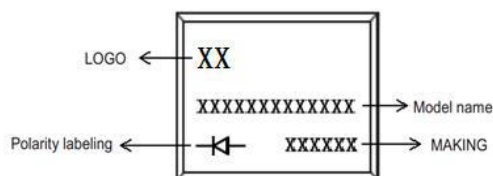

MAKING:

X X X X X
 → Assembly code (e.g : AB,CD,.....)
 → Material -Code (H:No halogen A:ordinary)
 → Week - code (WW:01~52)
 → Year - code (Y: Last digit of year & A:2012,B:2013. . .)


Ordering information

Part Number	Package	Unit Weight	Base Quantity	Delivery mode
MUR2060FAC	TO-220FAC	0.06oz(1.7g)	50 pcs / tube	1000pcs/box 5000pcs/carton

Note: For Halogen Free molding compound, add "H" suffix to part number above.

Package Outline Dimensions millimeters

TO-220FAC

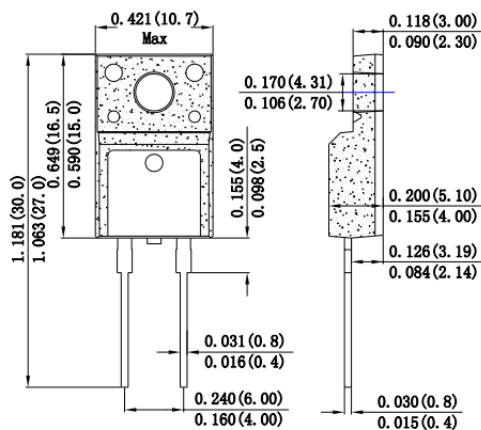

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [YFW Electronics](#) manufacturer:

Other Similar products are found below :

[RL252-TP](#) [DLA11C-TR-E](#) [JANTX1N5634A](#) [UFS120Je3/TR13](#) [A1N5404G-G](#) [CRF02\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#)
[UES1302](#) [ACEFC304-HF](#) [JANTX1N5822US](#) [SM100](#) [NTE5819](#) [NTE5828](#) [NTE5911](#) [NTE5915](#) [NTE6104](#) [NTE6164](#) [NTE6165](#) [NTE6364](#)
[SET130312](#) [NRVUS110VT3G](#) [UES1106](#) [UES1306](#) [DSI30-08AS-TRL](#) [NRVUS240VT3G](#) [JAN1N649-1](#) [R4000GPS-TP](#) [DPG60IM300PC-](#)
[TRL](#) [D20XB60-7101](#) [F11K120](#) [S2G-AQ](#) [S2M-AQ](#) [S3JSMB](#) [S3MSMB](#) [SKN 320/08](#) [SKR 26/08](#) [DTH8S06D](#) [DTH810D](#) [RU20A](#) [VS-](#)
[E5TX3006S2LHM3](#) [RGBP310](#) [SFF2060H-P3](#) [HER608](#) [RS2MF](#) [SFR25U20EPN](#) [SFRD92-02AEPS](#) [ES1JF](#) [ES2EF](#) [ES2AF](#)