


Features

- High power and current handing capability
- Lead free product is acquired
- Surface mount package

Application

- Battery protection
- Load switch
- Power management




Marking and pin assignment


4606A : Device code
XXXXXX : Code

30V N-Channel and P-Channel MOSFET Product Summary

V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
30V	30mΩ@10V	6A
	42mΩ@4.5V	
-30V	50mΩ@-10V	-4.5A
	70mΩ@-4.5V	



SOP-8 top view



Schematic diagram



Pb-Free



RoHS



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	N-Channel	P-Channel	Unit
V_{DS}	Drain-Source Breakdown Voltage	30	-30	V
V_{GS}	Gate-Source Voltage	±20	±20	V
T_J	Maximum Junction Temperature	150	150	°C
T_{STG}	Storage Temperature Range	-55 to 150	-55 to 150	°C
I_S	Diode Continuous Forward Current	6	-4.5	A
	$T_C=25^{\circ}\text{C}$			

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^{\circ}\text{C}$	33	-28	A
I_D	Continuous Drain Current@GS=10V	$T_C=25^{\circ}\text{C}$	6	-4.5	A
P_D	Maximum Power Dissipation	$T_C=25^{\circ}\text{C}$	2	2	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient(*1 in2 Pad of 2-oz Copper, Max.)		50	50	°C/W

N-Ch Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	VGS=0V, ID=250μA	30	--	--	V
IDSS	Zero Gate Voltage Drain Current	VDS=30V, VGS=0V	--	--	1	uA
IGSS	Gate-Body Leakage Current	VGS=±20V, VDS=0V	--	--	±100	nA
VGS(th)	Gate Threshold Voltage	VDS=VGS, ID=250μA	1	1.5	2.5	V
RDS(on)	Drain-Source On-State Resistance	VGS=10V, ID=5.6A	--	19	30	mΩ
		VGS=4.5V, ID=5A	--	26	42	
Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
CISS	Input Capacitance	VDS=10V, VGS=0V, f=1MHz	--	632	--	pF
COSS	Output Capacitance		--	58	--	pF
CRSS	Reverse Transfer Capacitance		--	70	--	pF
Switching Characteristics						
Qg	Total Gate Charge	VDS=15V, ID=3.6A, VGS=10V	--	17	--	nC
Qgs	Gate Source Charge		--	2	--	nC
Qgd	Gate Drain Charge		--	2	--	nC
td(on)	Turn-on Delay Time	VDS=15V, RL=4.1Ω, VGS=10V, RG=3Ω	--	4.5	--	nS
tr	Turn-on Rise Time		--	28.5	--	nS
td(off)	Turn-Off Delay Time		--	16.5	--	nS
tf	Turn-Off Fall Time		--	26	--	nS
Source- Drain Diode Characteristics						
VSD	Forward on voltage	Tj=25℃, Is=5.6A,	--	--	1.2	V

P-Ch Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	VGS=0V, ID=-250μA	-30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	VDS=-30V, VGS=0V	--	--	-1	uA
I _{GSS}	Gate-Body Leakage Current	VGS=±20V, VDS=0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	VDS=VGS, ID=-250μA	-1	-1.5	-2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	VGS=-10V, ID=-4.2A	--	39	50	mΩ
		VGS=-4.5V, ID=-3.5A	--	52	70	
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	VDS=-15V, VGS=0V, f=1MHz	--	770	--	pF
C _{OSS}	Output Capacitance		--	440	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	123	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	VDS=-10V, ID=-4.2A, VGS=-15V	--	30	--	nC
Q _{gs}	Gate Source Charge		--	2.7	--	nC
Q _{gd}	Gate Drain Charge		--	6.9	--	nC
t _{d(on)}	Turn-on Delay Time	VDD=-15V, ID=-1A, VGS=-10V, RG=2.5Ω	--	9	--	nS
t _r	Turn-on Rise Time		--	16	--	nS
t _{d(off)}	Turn-Off Delay Time		--	77	--	nS
t _f	Turn-Off Fall Time		--	40	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=-4.2A,	--	--	-1.2	V

N-Channel Typical Operating Characteristics

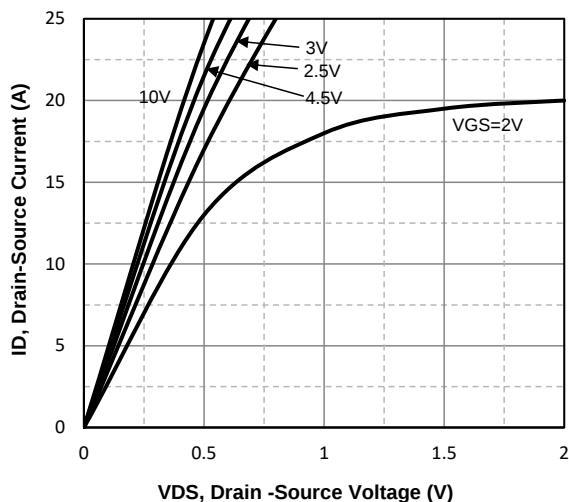


Fig1. Typical Output Characteristics

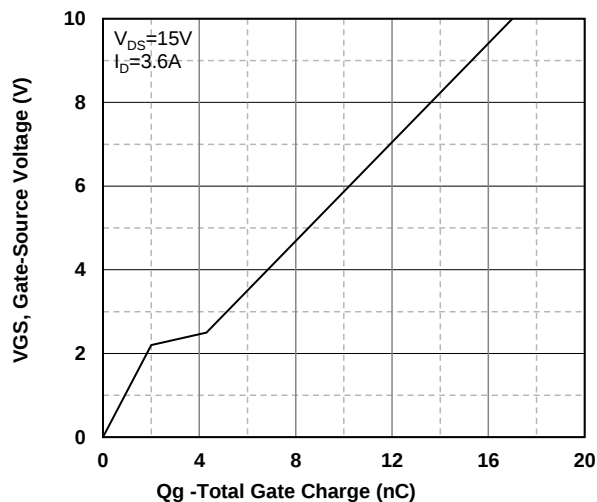


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

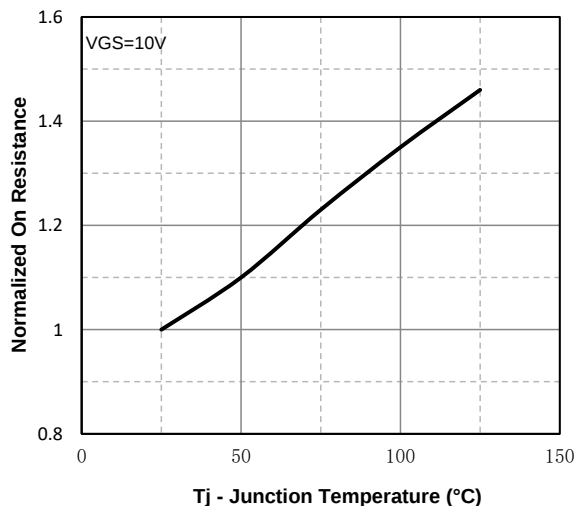


Fig3. Normalized On-Resistance Vs. Temperature

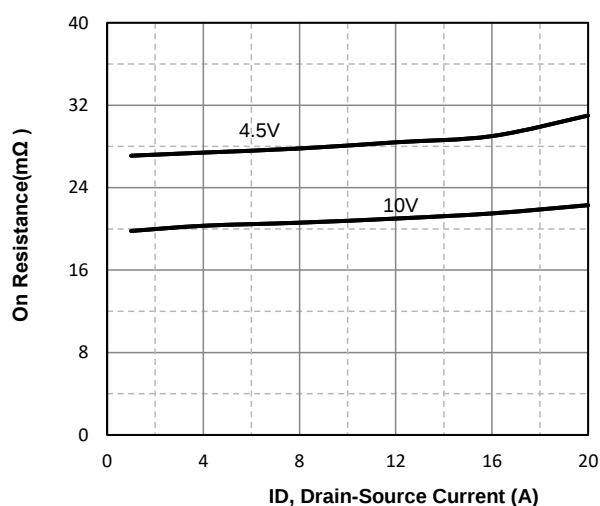


Fig4. On-Resistance Vs. Drain-Source Current

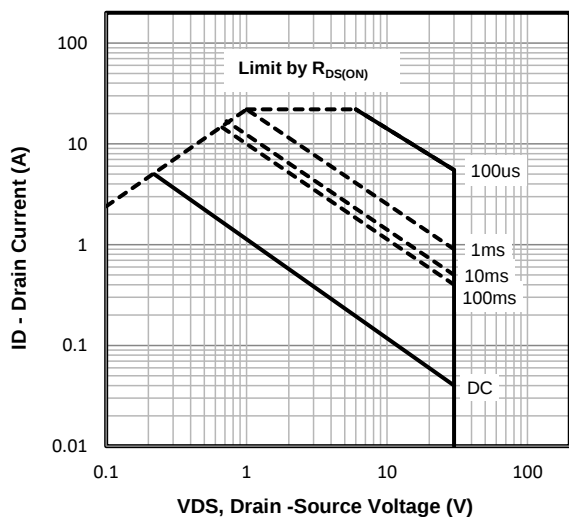


Fig5. Maximum Safe Operating Area

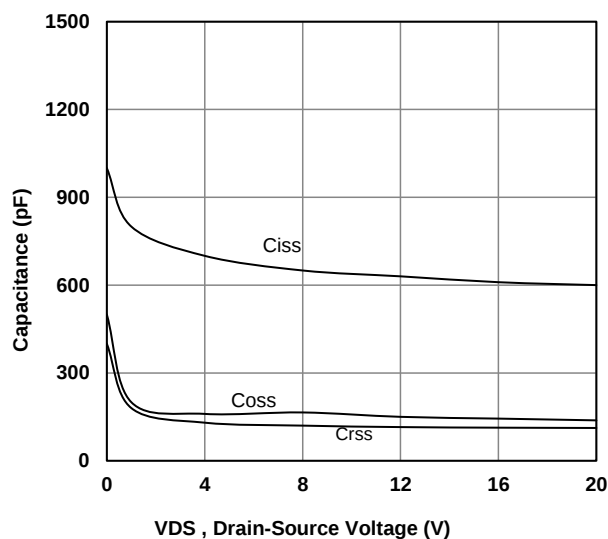


Fig6. Typical Capacitance Vs. Drain-Source Voltage

P-Channel Typical Operating Characteristics

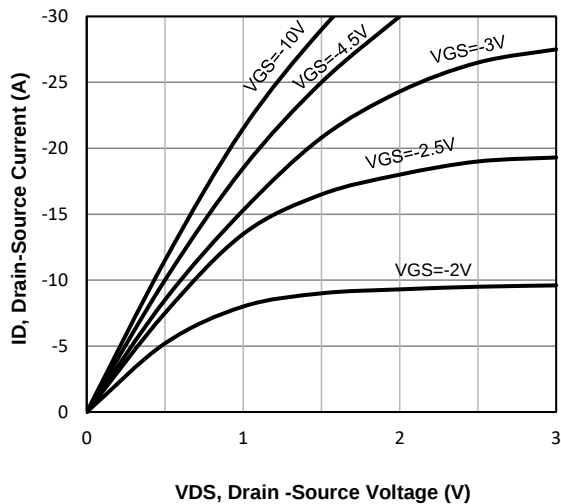


Fig1. Typical Output Characteristics

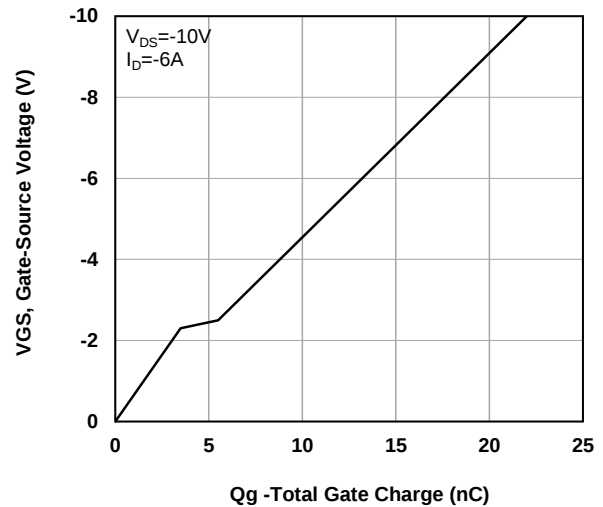


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

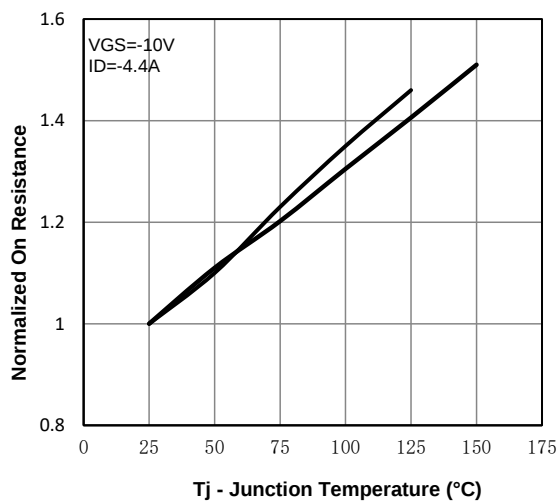


Fig3. Normalized On-Resistance Vs. Temperature

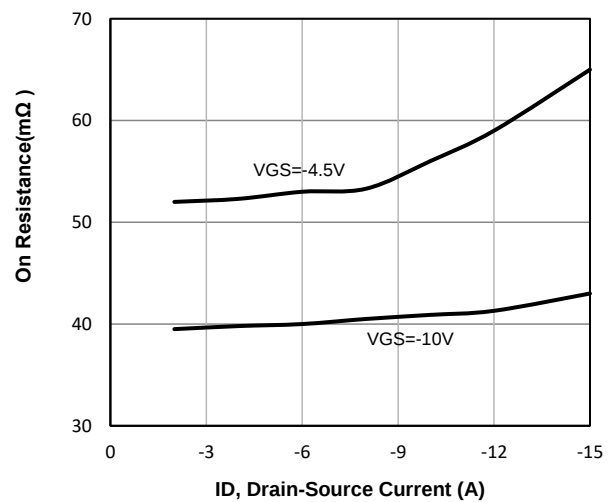


Fig4. On-Resistance Vs. Drain-Source Current

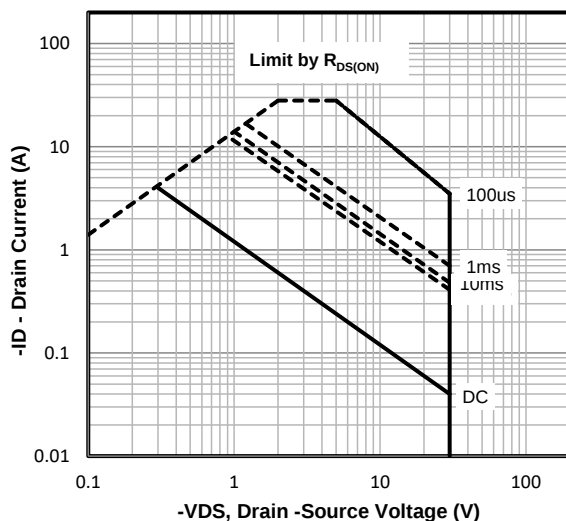


Fig5. Maximum Safe Operating Area




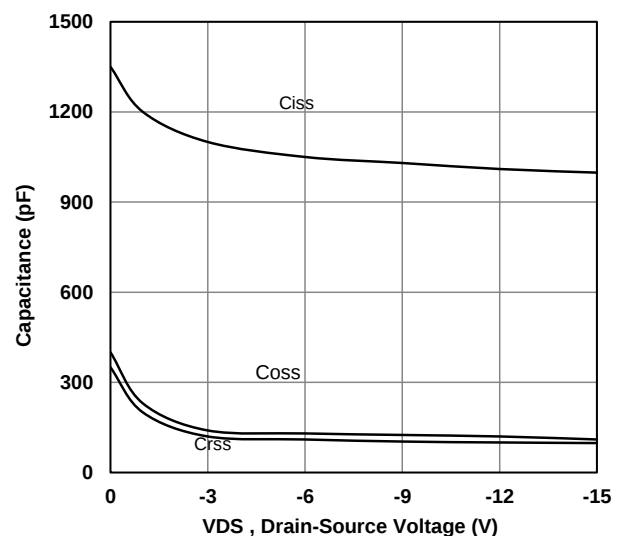


Fig6 Typical Capacitance Vs. Drain-Source Voltage

SOP-8 Package information

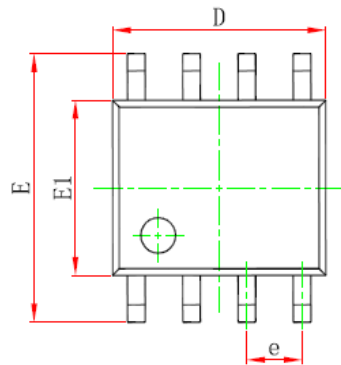

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.450	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
e	1.270 (BSC)		0.050 (BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFETs](#) category:

Click to view products by [Yongyutai Electronics](#) manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [NTNS3A92PZT5G](#) [IRFD120](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [MIC4420CM-TR](#) [IRFS350](#) [IPS70R2K0CEAKMA1](#) [AON6932A](#) [TS19452CS RL](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [SCM040600](#) [NTE2384](#) [2N7000TA](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [STU7N60DM2](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [2N7002W-G](#) [MCQ7328-TP](#) [IPB45P03P4L11ATMA2](#) [BXP4N65F](#) [BXP2N20L](#) [BXP2N65D](#) [TSM60NB380CP ROG](#) [SLF10N65ABV2](#) [IRF9395MTRPBF](#) [FCMT080N65S3](#) [NTD5C632NLT4G](#) [NTMFS0D55N03CGT1G](#) [NTMFS1D15N03CGT1G](#) [NTMTS0D4N04CTXG](#) [NTMYS2D1N04CLTWG](#) [NVD360N65S3T4G](#)