



# BC856/BC857/BC858

## TRANSISTOR (PNP)


### MARKING:

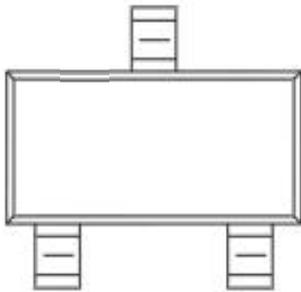

### Equivalent Circuit:

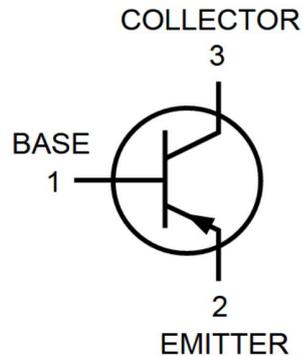

### SOT-23



- 1.BASE
- 2.EMITTER
- 3.COLLECTOR

### FEATURES:

- ※ Ideally suited for automatic insertion
- ※ For switching and AF amplifier applications

### MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	VCBO	BC856	-80
		BC857	-50
		BC858	-30
			V
Collector-Emitter Voltage	VCEO	BC856	-65
		BC857	-45
		BC858	-30
			V
Emitter-Base Voltage	VEBO	-5	V
Collector Current	IC	-0.1	A
Collector Power Dissipation	PC	200	mW
Thermal Resistance From Junction To Ambient	ROJA	625	°C/W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-65~+150	°C

### DEVICE MARKING:

BC856A=3A; BC856B=3B

BC857A=3E; BC857B=3F; BC857C=3G

BC858A=3J; BC858B=3K; BC858C=3L

# BC856/BC857/BC858

## ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-base breakdown voltage BC856 BC857 BC858	V(BR)CBO	IC= -10μA, IE=0	<b>-80</b> <b>-50</b> <b>-30</b>			V
Collector-emitter breakdown voltage BC856 BC857 BC858	V(BR)CEO	IC= -10mA, IB=0	<b>-65</b> <b>-45</b> <b>-30</b>			V
Emitter-base breakdown voltage	V(BR)EBO	IE=-1μA, IC=0	-5			V
Collector cut-off current BC856 BC857 BC858	ICBO	VCB=-70 V , IE=0 VCB=-50 V , IE=0 VCB=-30 V , IE=0			-0.1	μA
Emitter cut-off current	IEBO	VEB=-5V , IC=0			-0.1	μA
DC current gain BC856A; 845A; 858A BC856B; 857B; 858B BC857C; BC858C	hFE	VCE=-5V, IC= -2mA	125 220 420		250 475 800	
Collector-emitter saturation voltage	VCE(sat)	IC=-100 mA, IB= -5mA			-0.5	V
Base-emitter saturation voltage	VBE(sat)	IC=-100 mA, IB= -5mA			-1.1	V
Transition frequency	fT	VCE=-5V, IC= -10mA f=100MHz	100			MHz
Collector Current Capacitance	Cob	VCE=-10V, f=1MHz			4.5	pF


## CLASSIFICATION OF hFE

Rank	L	H	J
Range	125-200	200-350	300-400

# BC856/BC857/BC858

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

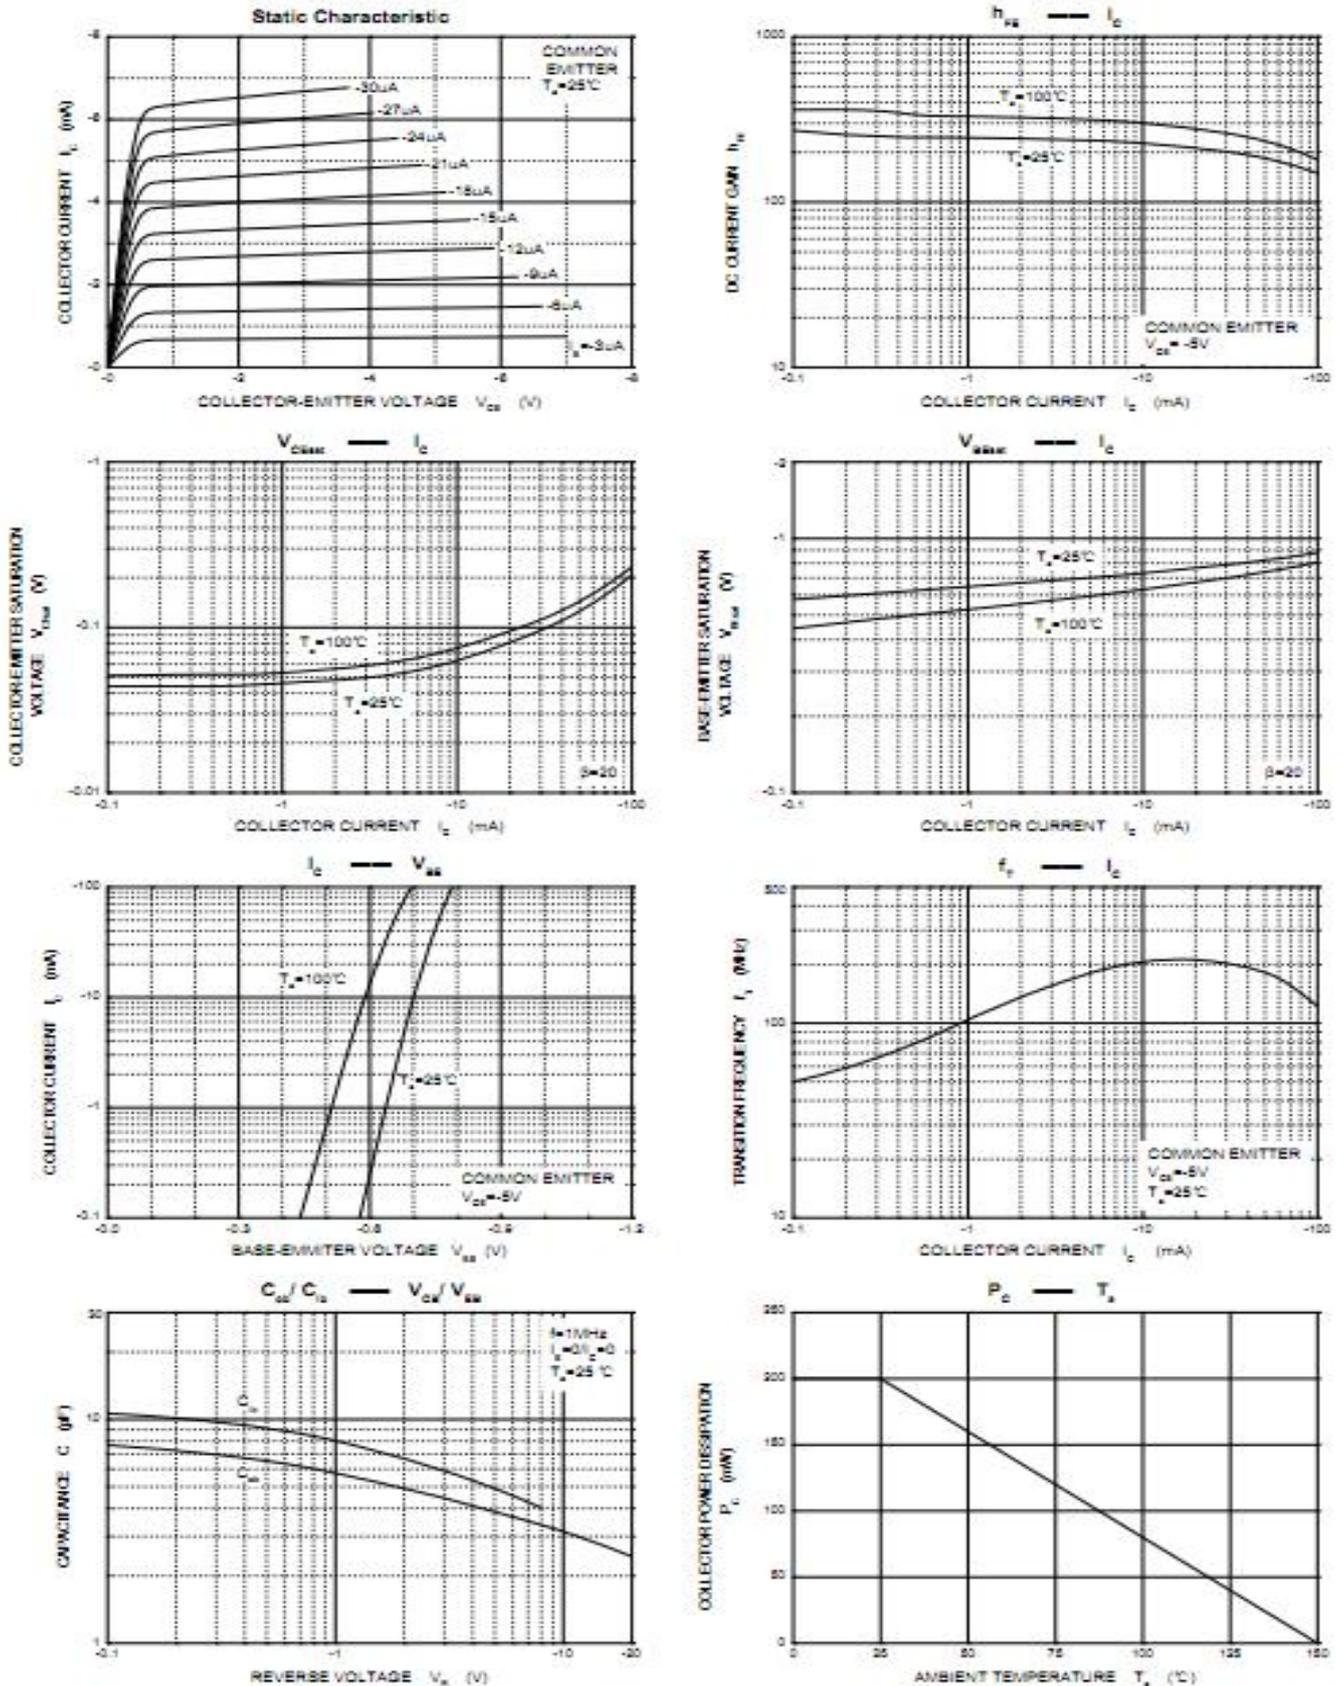

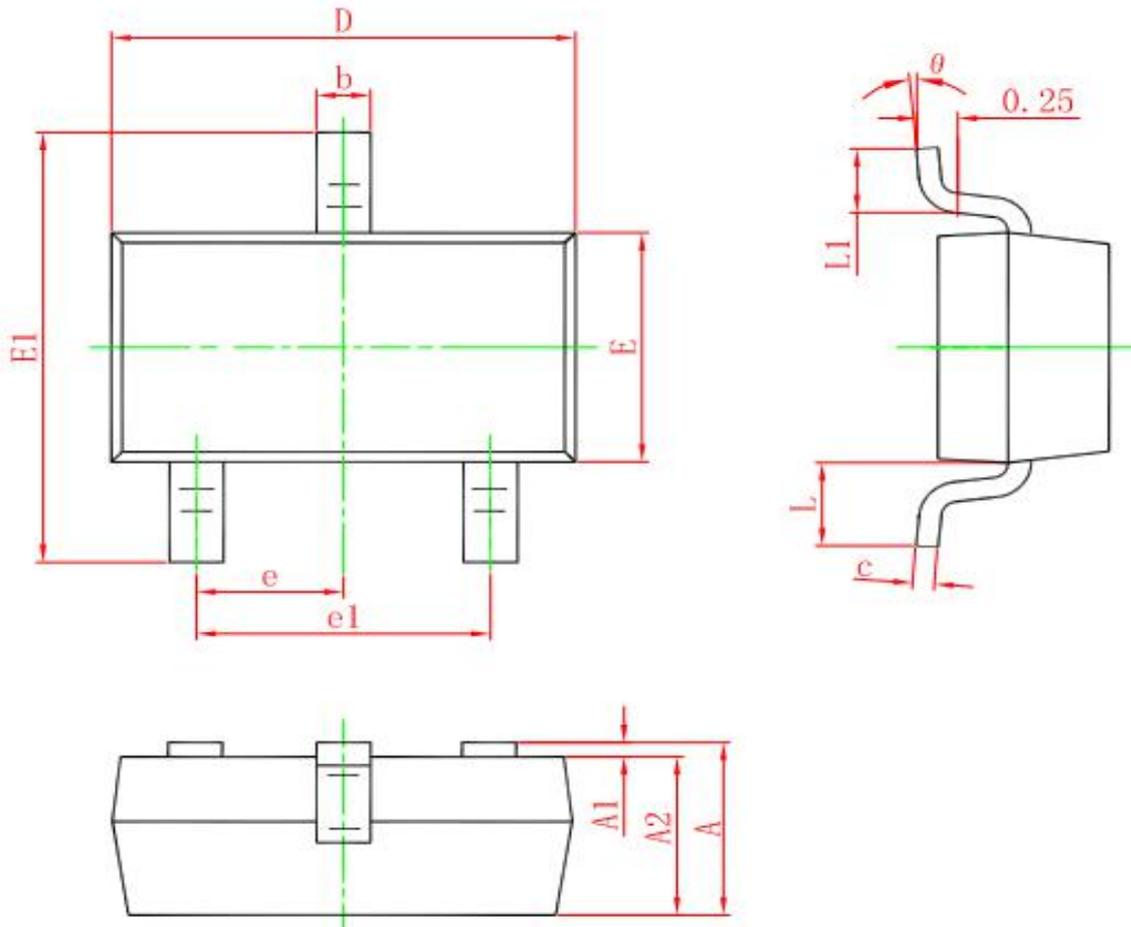**SOT-23 PACKAGE OUTLINE DIMENSIONS**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Yongyutai Electronics manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)  
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [SP000011176](#) [2N2907A](#) [2N3904-](#)  
[NS](#) [2N5769](#) [2SC2412KT146S](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#)  
[CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [30A02MH-TL-E](#) [NTE13](#) [NTE26](#)  
[NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#) [JANTX2N2920L](#) [JANSR2N2222AUB](#) [CMLT3946EG TR](#) [2SA1371D-AE](#)