

特征 Features

- 表面安装应用 For surface mount applications
- 玻璃钝化芯片 Glass passivated junction
- 快速响应时间 Very fast response time
- 优良钳位能力 Excellent clamping capability
- 最高焊接温度 260°C/10 秒
High temperature soldering guaranteed:
260°C/10 seconds at terminals
- 200W 峰值脉冲保护能力(≥60V 为 175W)
200W peak pulse power capability (175W above 60V)
- 10/1000μs 波形, 重复率:0.01%
a 10/1000μs waveform, repetition rate (duty cycle): 0.01%

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 焊料被镀 Terminals: Solder plated
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any
- 重量: 0.016克 Weight: 0.016 gram

极限值和温度特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
最大峰值脉冲功率 Peak pulse power dissipation with a 10/1000μs waveform ^(1, 2) (see fig. 1)	P _{PPM}	200	W
最大峰值脉冲电流 Peak pulse current with a 10/1000μs waveform ⁽¹⁾	I _{PPM}	See Next Table	A
正向峰值浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3ms single half sine-wave uni-directional only ⁽²⁾	I _{FSM}	20	A
典型热阻 Typical thermal resistance ⁽³⁾	R _{θJA}	180	°C/W
工作结温和存储温度 Operating junction and storage temperature range	T _J , T _{STG}	-55---+150	°C

Notes: (1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2. Rating is 175W above 60V


(2) Mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pads to each terminal

(3) Mounted on minimum recommended pad layout

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified)

Part Number	V _{RWM}	V _{BR@I_T}			I _{R@V_{RWM}}	V _{C@I_{PP}}		Marking Code	
		Min.		Max		V _{C@I_{PP}}			
		V	V	mA		μA	A		
SMF3.3A	3.3	5.2	6.0	10	400	8	25	FD	



Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified)

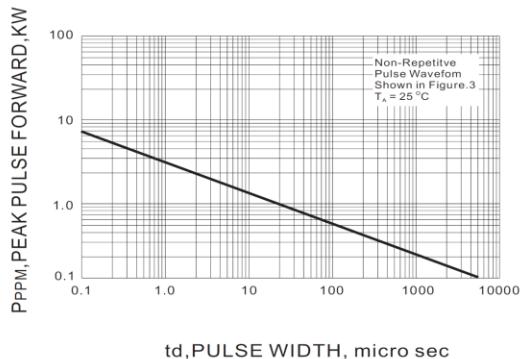


Fig.1 PEAK PULSE POWER RATING CURVE

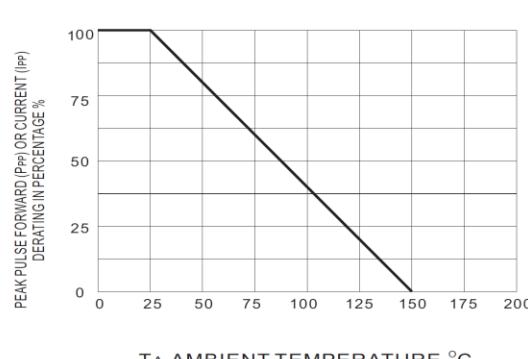


Fig.2 DERATING CURVE

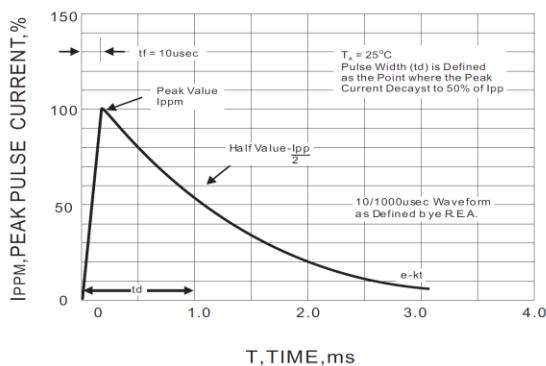


Fig.3 PULSE WAVEFORM

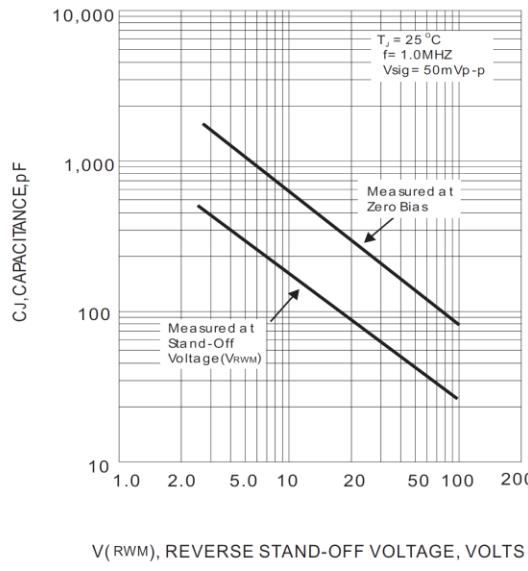


Fig.4 TYPICAL JUNCTION CAPACITANCE

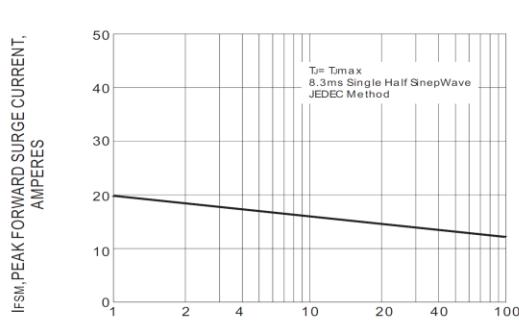


Fig.5 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Yongytai Electronics manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SM1605E3/TR13](#)
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#) [E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)