


Temperture Range: -40°C to $+105^{\circ}\text{C}$

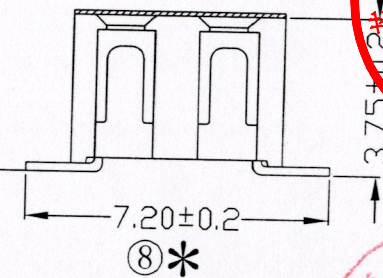

Recommended P. C. B LAYOUT
General Tolerance ± 0.05

宇熙精密连接器有限公司
發行章
工程
部

文控文保

注意事项

1. 带*为品质重点检验尺寸

				OPERATION		SCALE		Fit		Yxcon 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.							
				X.X ±0.25		UNIT		MM									
				X.XX ±0.20		SIZE		A4		DESIGN		李青杰2023.05.04		PART NO.		F136-1203A0CMUB1	
A0	2023.05.04	/		X.XXX ±0.10		SHEET		1/1		CHECK				TITLE:		2.54排母 3.6mm塑高 2*3P SMT; 7.2 U型	
REV	DATE	SYMBOL		Angle ±3°		PROJ.				APPROVE				Customer No.		PA9T料 镀普金 麦拉+卷装	
				DIM TOL													

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Yxcon](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)