

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA9T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀普金

Contact: Brass, GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage: AC 500V/Minute.

温度范围: -40° C to +105° C


Temperture Range: -40° C to +105° C

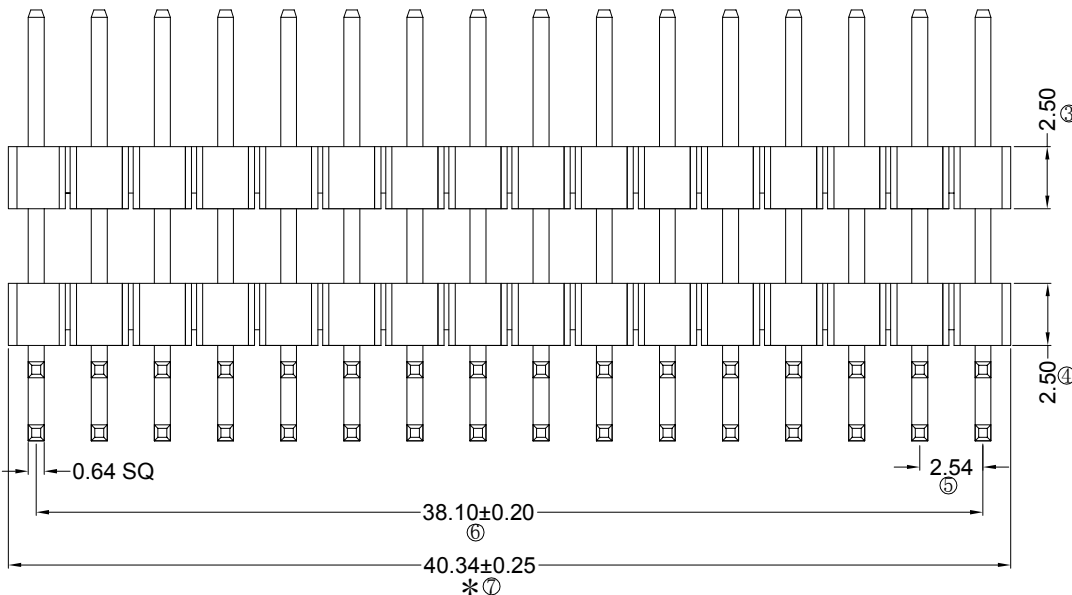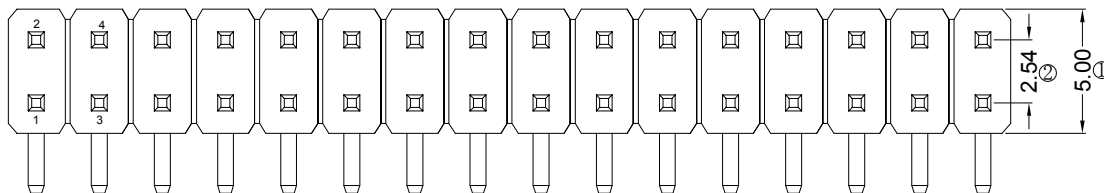

Ordering Information

P125-22 16 A0 C R 180 A 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Full of Gold	Plating Semi-gold	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm 17: 1.7mm 20: 2.0mm 25: 2.54mm 30: 3.0mm	2-40P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	A: PBT B: PA6T C: PA9T D: LCP		A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature						

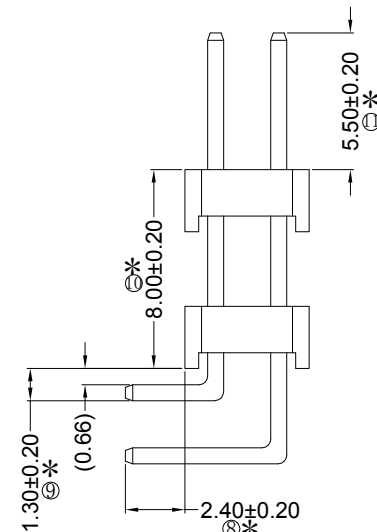

RoHS
COMPLIANT

客编:

注意事项

1. 带*为品质重点检验尺寸

				OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司			
				X.X	±0.25	UNIT	MM	www.yxcon.com	Dongguan Yuxi Electronic Co., Ltd.	
				X.XX	±0.20	SIZE	A4	DESIGN	李官森2022.04.08	PART NO.
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:
				Angle	±3°	PROJ.	1/1	APPROVE		Customer No.
				DIM	TOL					
A0	2022.04.08	/	新版发行							P125-2216A0CR180A1
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION							PH2.54 2*16P*2 L=18.0/2.4(0.66)/5.5/23.0 90度 PA9T 镀普金 袋装100PCS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Yxcon](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)