

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.

Housing:PA9T+30%G.F UL94V-0, Color:Black

四方针：黄铜，镍底30u"MIN, 表面镀金1u"MIN

Contact:Brass, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current:3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V/分钟.

Withstanding Voltage:AC 500V/Minute.

温度范围: -40°C to $+105^{\circ}\text{C}$

Temperture Range: -40°C to $+105^{\circ}\text{C}$

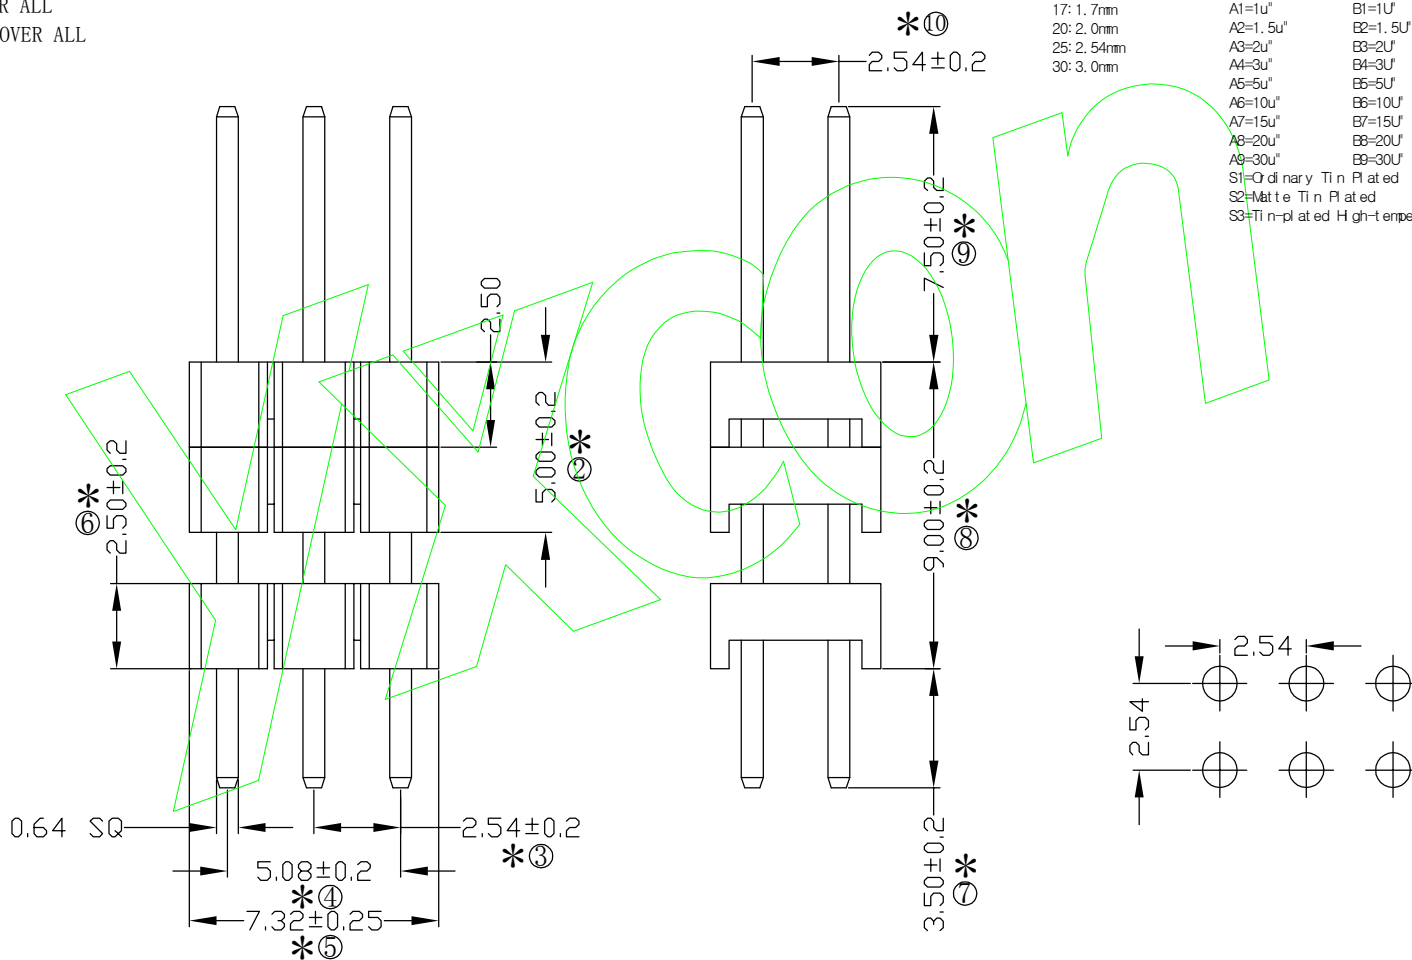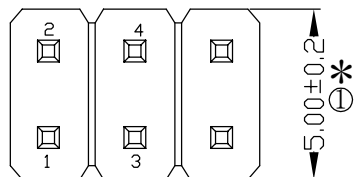

Ordering Information
P125-32 03 A0 C S 200 A 1

HE GHT OF HOUSING	NO. OF PINS PER ROW	Contact	Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm	2-40P	Full of Gold	Sn-30, 80 μ	A: PBT		A: PE Bag
17: 1.7mm		A1=1u"	B1=1U"	B: PA6T		B: Tape & Reel
20: 2.0mm		A2=1.5u"	B2=1.5U"	C: PA6T		C: Tube
25: 2.54mm		A3=2u"	B3=2U"	D: LCP		D: Tube+CAP
30: 3.0mm		A4=3u"	B4=3U"			E: Tray
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=O dieary	Tin Plated			
		S2= Matte	Tin Plated			
		S3= Tin-plated	High temperature			

客编：

注 1. 带*为品质检验尺寸

注意事项

						OPERATION		SCALE		Fit		 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
						X.X	+0.25	UNIT		MM			
						X.XX	+0.20	SIZE	A4	DESIGN	周芳杰	PART NO	P125-3203A0CS200A1
						X.XXX	+0.10						
A0	2020.04.03	新版发行	周芳杰	刘贵宝		Angle	+13°	SHEET	1/1	CHECK		TITLE	PH2.54*2.5+2.5+2.5 2*3P*3 L=20.0/3.5/7.5 180度 镀普金 PA9T料 袋装
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		DIM	TOL	PROJ.		APPROVE		Customer No.	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Yxcon](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)