



■ Features

- (1) 2 mounting options :
 MC13** Screw mounting type
 MC13**DIN Din rail mounting type
- (2) Worldwide compliance :
 Voltage rating 3 phase AC500V, 10, 20, 30A
- (3) Safe design :
 Terminal with cover, Low leakage current
- (4) Environmental compliance : Lead free soldering

■ Safety standard


-  UL1283
 CSA Std. C22. 2 No. 8
 EN133200

■ Specifications


Items	Model		MC1306	MC1310	MC1320	MC1330
	STD type	DIN type	MC1306DIN	MC1310DIN	MC1320DIN	MC1330DIN
1	Rated Voltage (AC)		500V (50/60Hz)			
2	Rated Current (*1)		6A	10A	20A	30A
3	Test Voltage (terminals to base plate, 1min AC)		2000V (100mA) at 25°C, 70% RH			
4	Isolation Resistance (terminals to base plate, 500VDC)		100MΩ min at 25°C, 70% RH			
5	Leakage Current	500V, 60Hz	5.0mA max			
6	DC Resistance (three lines)		90mΩ max	68mΩ max	23mΩ max	11mΩ max
7	Temperature Rise		30°C max			
8	Operating Temperature		-25°C ~ +85°C			
9	Operating Humidity		30% ~ 95% RH (No Dewdrop)			
10	Storage Temperature		-40°C ~ +85°C			
11	Storage Humidity		10% ~ 95% RH (No Dewdrop)			
12	Vibration	MC13**	At no operating 10~55~10Hz, Amplitude (Sweep for 1min) 0.825mm constant (Maximum 49.0m/s ²) X,Y,Z 1hour each			
		MC13**DIN	At no operating 55~250~55Hz, Acceleration (Sweep for 1min) 19.6m/s ² , X,Y,Z 1hour each			
13	Weight		600g			

(Note) : Value for Ta≤50°C For Ta>50°C derate according to the derating curve shown on the right.


■ Circuit

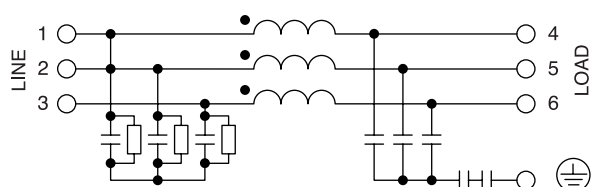

■ Derating

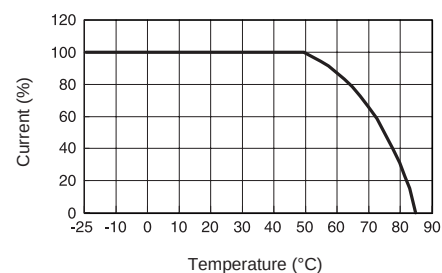


■ Terminal Explanation

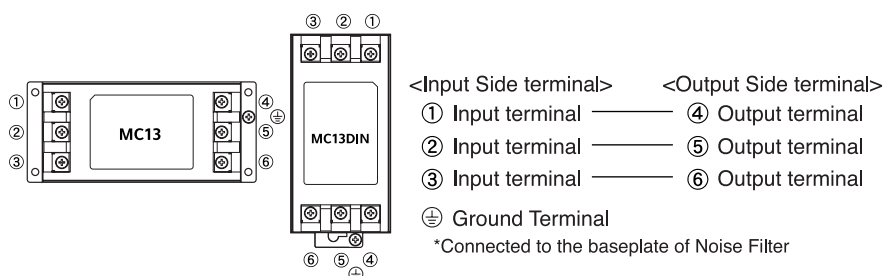


- Request customer specification for further details of specifications, outline, characteristics, etc.
 Read the instruction manual before usage.
- Contact us about delivery before ordering.

MC13-SERIES


MC13**

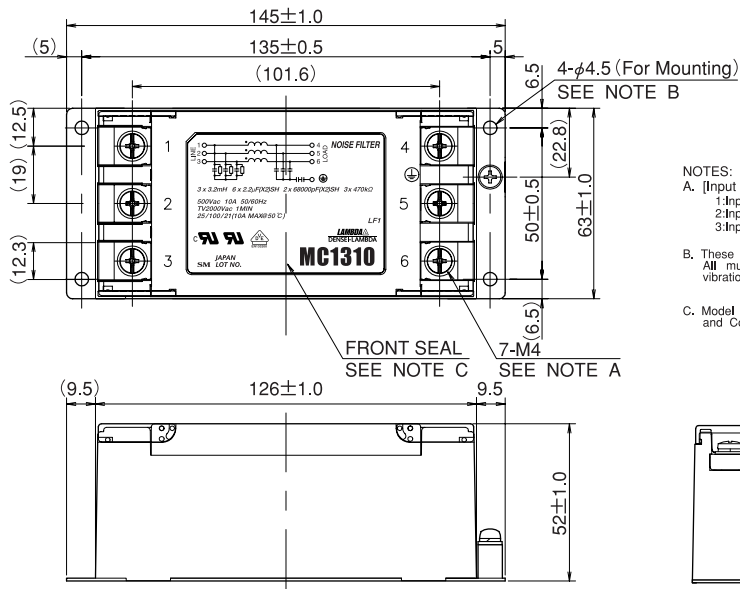

- NOTES:
- A. [Input side terminal] [Output side terminal]
 1: Input Terminal 4: Output Terminal
 2: Input Terminal 5: Output Terminal
 3: Input Terminal 6: Output Terminal
 ●: Base Plate
- B. These are for customer's chassis mounting. All must be screwed in order to conform the vibration spec.
- C. Model name, Specifications, Lot No. and Country of Manufacture are shown here.

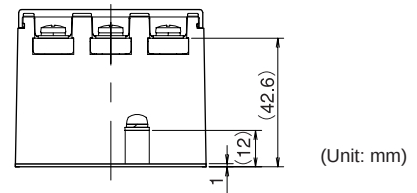

MC13**DIN

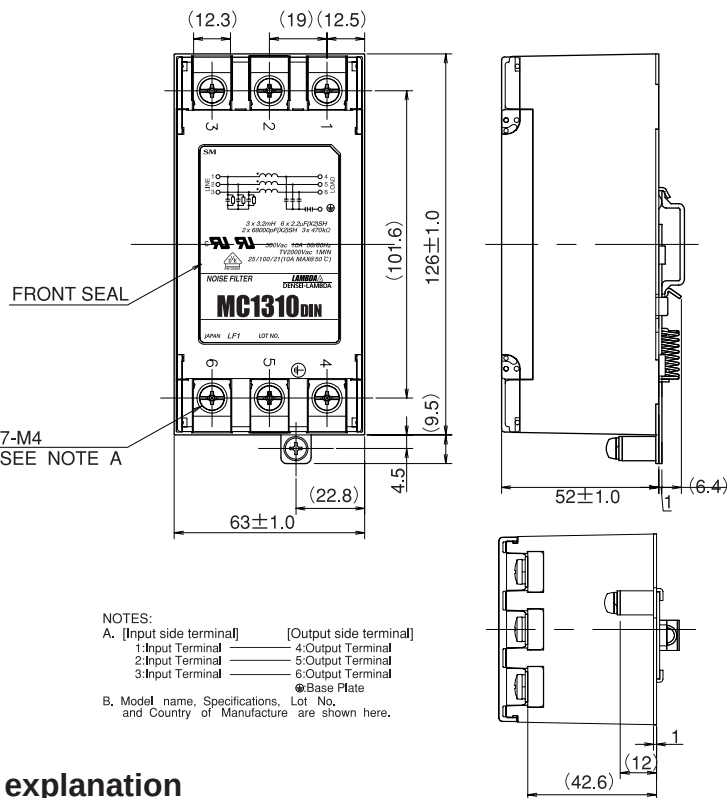


- NOTES:
- A. [Input side terminal] [Output side terminal]
 1: Input Terminal 4: Output Terminal
 2: Input Terminal 5: Output Terminal
 3: Input Terminal 6: Output Terminal
 ●: Base Plate
- B. Model name, Specifications, Lot No. and Country of Manufacture are shown here.

MC13**DIN explanation


*Mounting

MC13**DIN could be mounted on 35mm wide (TS35 type) Din-rail. For mounting, put the part (A) of the unit over the top hat rail and push forward like (B), so that the rail stopper is firmly held on the Din-rail. For unmounting, put a screw driver into the part (C) and lift it up to remove the unit.

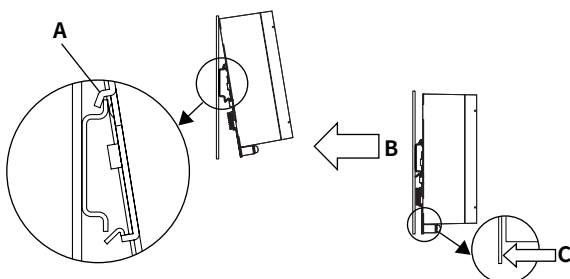

*Ground

Do not earth with Din-rail. Earth directly from the ground terminal of MC13**DIN.

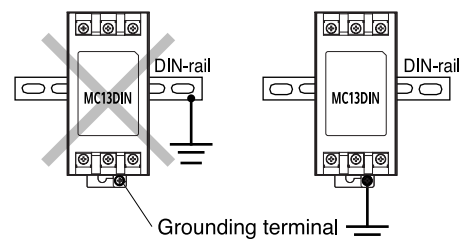


MC13-SERIES

CHARACTERISTICS


■ Attenuation Characteristic (typical)

MC1306


● Asymmetrical

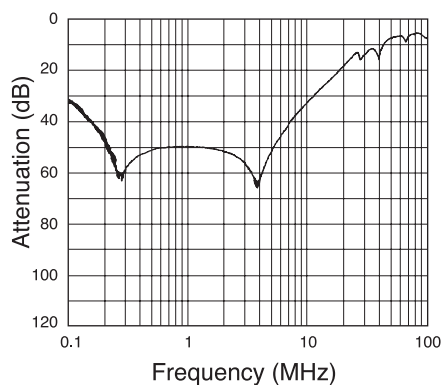


● Symmetrical

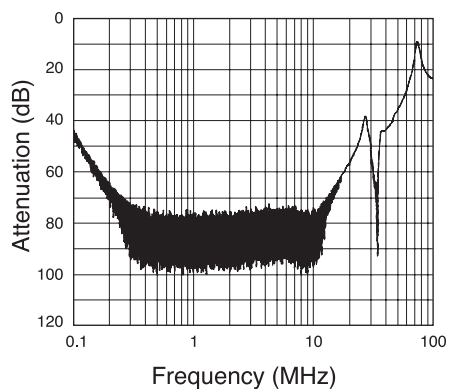

● Attenuation characteristics Reference Data (Inverter + Motor)

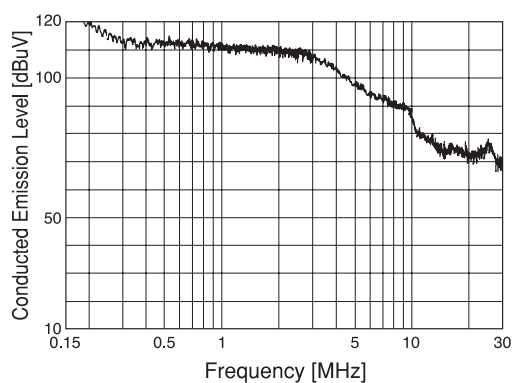


add MC1320

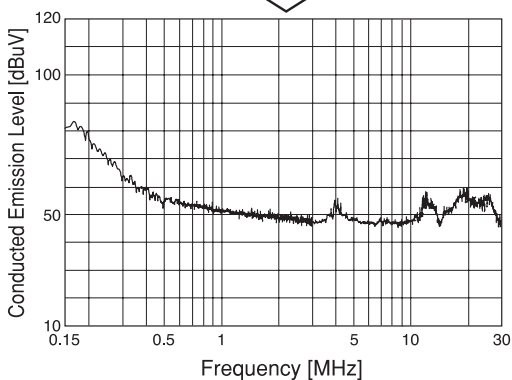


MC1310


● Asymmetrical

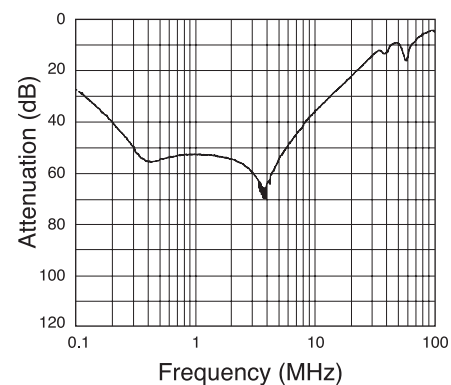


● Symmetrical

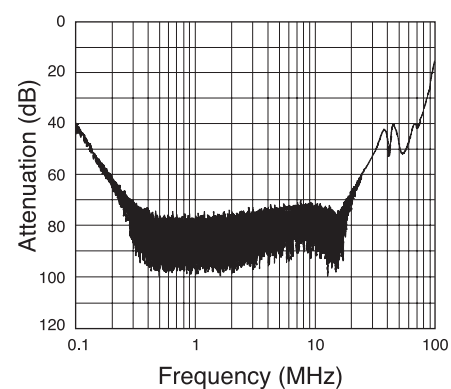

● Attenuation characteristics Reference Data (Inverter + Motor)

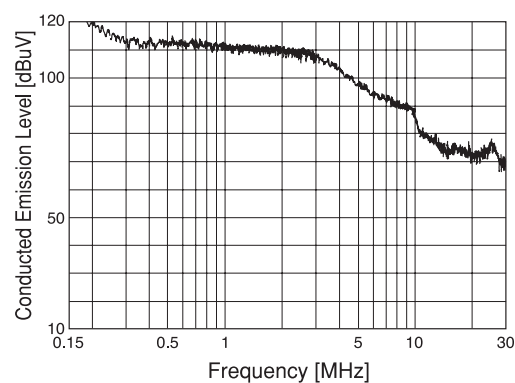

add MC1330

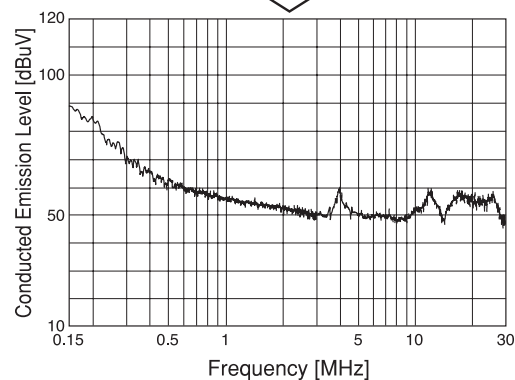


CHARACTERISTICS


■ Attenuation Characteristic (typical)

MC1320


● Asymmetrical

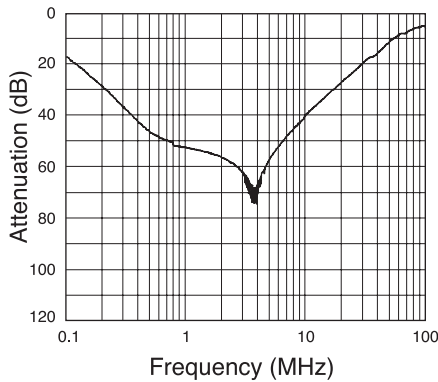


● Symmetrical

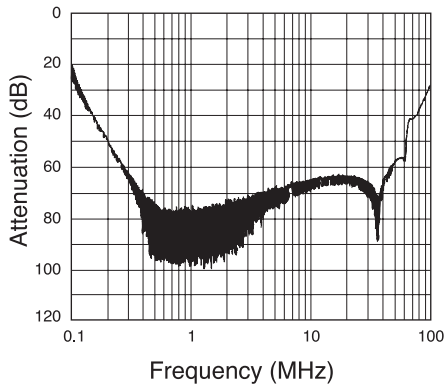

● Attenuation characteristics
Reference Data (Inverter + Motor)

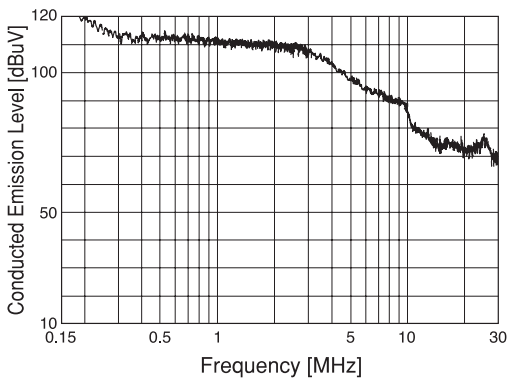


add MC1306

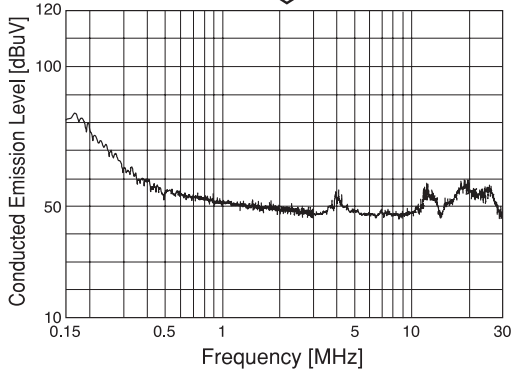


MC1330


● Asymmetrical

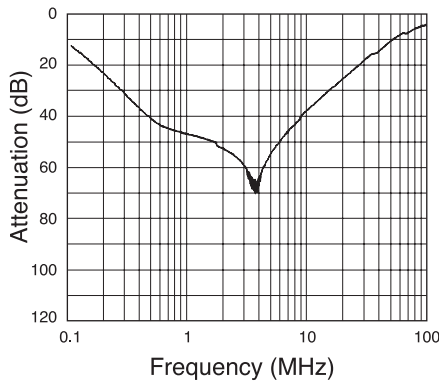


● Symmetrical

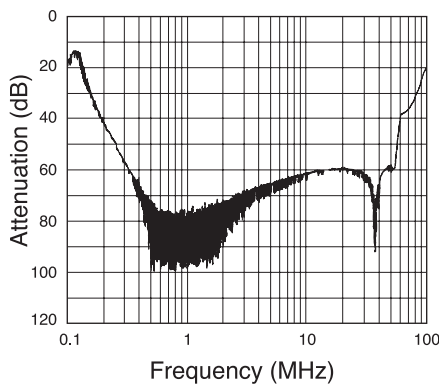

● Attenuation characteristics
Reference Data (Inverter + Motor)

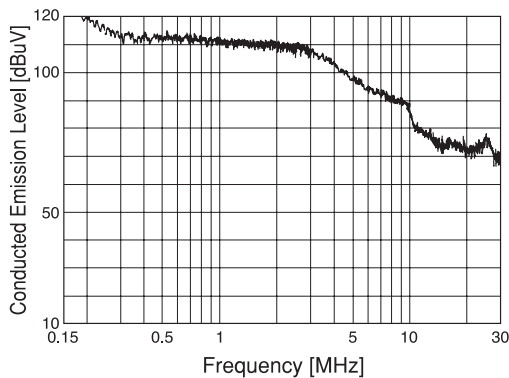

add MC1310

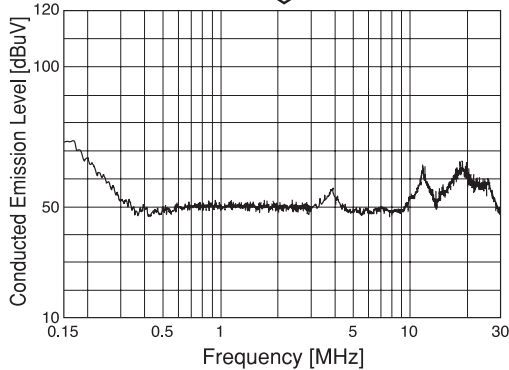

E M I
Noise filter

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Line Filters](#) category:

Click to view products by [TDK-Lambda](#) manufacturer:

Other Similar products are found below :

[5B1](#) [6609019-3](#) [6609026-5](#) [6609030-6](#) [6609063-2](#) [6609973-2](#) [7-1609090-5](#) [F1500CA06](#) [F7382Z](#) [F7863Z](#) [FAHAV3100ZC000](#) [806276](#)
[FMAC-0FIA-6400](#) [FN2020B-1-06](#) [FN2080B-10-06](#) [FN2090A-1-06](#) [FN2410H-32-33](#) [FN2410H-80-34](#) [FN2412H-16-44](#) [FN420-1-13](#) [FP144](#)
[8-6609089-0](#) [12-MMB-030-11-D](#) [B84144A0050R120](#) [B84144A90R120](#) [20B1](#) [RSEL-2001A](#) [2B1](#) [LP183](#) [1-6609070-1](#) [F1500CA10](#) [1B1](#)
[FN2020A-10-06](#) [FN2020B-3-06](#) [FN2060A-3-06](#) [FN2070A-16-06](#) [FN2070B-16-08](#) [FN2090A-20-06](#) [FN2090B-12-06](#) [FN2090Z-1-06](#)
[FN2410H-25-33](#) [FN2410H-60-34](#) [FN2410H-8-44](#) [FN2412H-25-33](#) [FN2412H-8-44](#) [FN610R-3-06](#) [20EHZ7](#) [20K1](#) [30B6](#) [30BCF10R](#)