

GBR-618 Series

Characteristic

GBR-618 miniature heating elements are made in a thick film technology, on ceramic substrates (Al_2O_3 - 96%). Heaters are characterized by high power at compact size, and precise amount of dissipated power (1% tolerance). GBR-618 series elements are useful in applications, where small size and precision of heating is desired, and as a high power resistors. Heaters have outputs in the form of solder/contact fields.

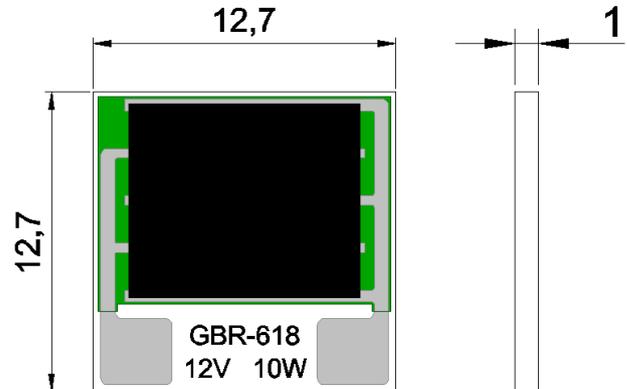



Fig. 1. Preview with dimensions [mm]

<u>Parameter</u>	<u>Value</u>
Rated power (on heatsink)	5 - 20 W
Power tolerance	±1 %
Supply voltage	3 - 24 V
Temperature coefficient of resistance	±100 ppm/°C
Max. element temperature	300 °C

Typical values

Supply voltage	Rated power	Supply voltage	Rated power
3 V	5 W	12 V	5 W
3 V	10 W	12 V	10 W
3 V	20 W	12 V	20 W
9 V	5 W	24 V	5 W
9 V	10 W	24 V	10 W
9 V	20 W	24 V	20 W

Product marking

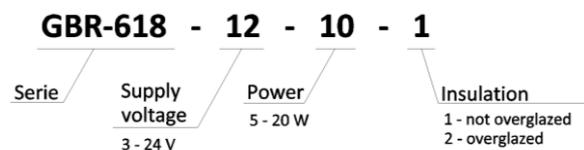

Other values of supply voltage and rated power are available on request.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Planar Resistors - Chassis Mount](#) *category:*

Click to view products by [Telpod](#) *manufacturer:*

Other Similar products are found below :

[LPS0300HR300JB](#) [20-100RP](#) [HVR10D2K0F](#) [HVR20C11MF](#) [HVR10D3M0J](#) [HVR30B82MF](#) [HVR10D25MK](#) [HVR30B500KF](#)

[BDS2A10033RK](#) [TAP800K68RE](#) [TGHHV15R0FE](#) [TL122KU221RE](#) [TGHDV100RJE](#) [TL71F9K40C](#) [LPS0300HR560JB](#) [FPA100 47K J](#)

[LPSA300H4R70JB](#) [LPSA300H10R0JB](#) [LPSA300H47R0JB](#) [LPSA300H1R00JB](#) [LPSA800H1R00JB](#) [LPSA800H1000JB](#) [LPSA800H47R0JB](#)

[LPSA300H1000JB](#) [LPSA800H10R0JB](#) [LPSA800H4R70JB](#) [504AS252KDG2](#) [TGHHV100RJE](#) [TGHHV33R0JE](#) [TGHHV500RJE](#)

[TGHHV5K00JE](#) [TGHHV5R00JE](#) [TGHHV680RJE](#) [TGHLV100RJE](#) [TGHLV150RJE](#) [TGHLV500RJE](#) [TGHLV5K00JE](#) [HTS-14-12-40-3/4.8](#)

[HTS-14-24-40-3/4.8](#) [HTS-15-230-100-1](#) [HTS-15-230-100-3/4.8](#) [HTS-15-230-100-3/6.3](#) [HTS-15-230-150-3/6.3](#) [FPA100 100R J](#) [FPA100 22K](#)

[J](#) [FPA100 22R J](#) [FPA100 2R0 J](#) [FPA100 330R J](#) [FPA100 6K8 J](#) [FPA100 8R0 J](#)