

# 30x30x15 mm



**SUNON**

## MagLev Green Motor Fan

## 4.8~6.0 CFM



| Model        | P/N | Bearing           | Rating           | Power            | Power                  | Speed | Air           | Static                              | Noise | Weight |
|--------------|-----|-------------------|------------------|------------------|------------------------|-------|---------------|-------------------------------------|-------|--------|
|              |     | ● VAPO<br>● 2BALL | Voltage<br>(VDC) | Current<br>(AMP) | Consumption<br>(WATTS) | (RPM) | Flow<br>(CFM) | Pressure<br>(Inch-H <sub>2</sub> O) | (dBA) | (g)    |
| GM0503PHV1-8 | GN  | ●                 | 5                | 0.11             | 0.6                    | 8500  | 6.0           | 0.17                                | 27    | 13.5   |
| GM0503PHV2-8 | GN  | ●                 | 5                | 0.07             | 0.4                    | 7000  | 4.8           | 0.12                                | 20    | 13.5   |
| GM1203PHV1-8 | GN  | ●                 | 12               | 0.054            | 0.6                    | 8500  | 6.0           | 0.17                                | 27    | 13.2   |
| GM1203PHV2-8 | GN  | ●                 | 12               | 0.029            | 0.4                    | 7000  | 4.8           | 0.12                                | 20    | 13.2   |

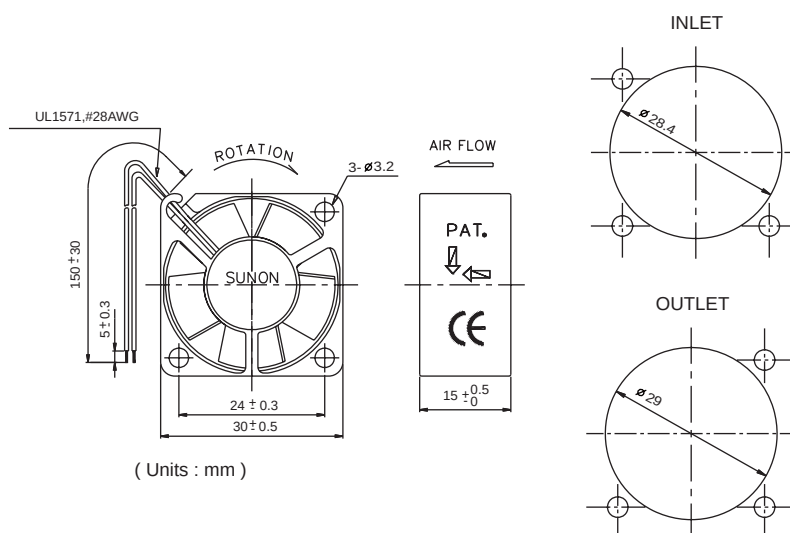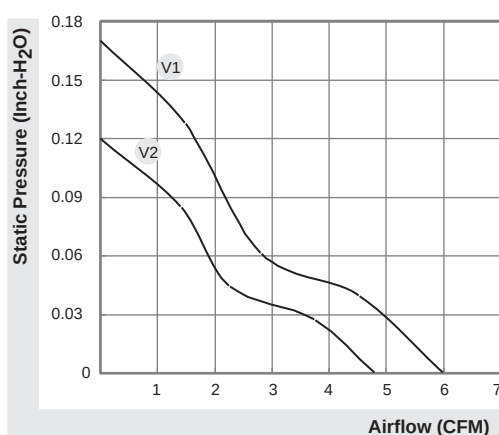

\*All model could be customized on voltage or any other requirements to fit your need.

\*Specifications subject to change without notice. Please Visit SUNON web site at <http://www.sunon.com> for update information.

# Fan 3rd Wire Signal

Fan with switching driving circuit designed for rpm measurement:

These fan motors have three lead wires:

+:Red,



-:Black,

output signal for 3rd wire:



F Type : Yellow

R Type : White

## ● R Type (Rotation Detector)

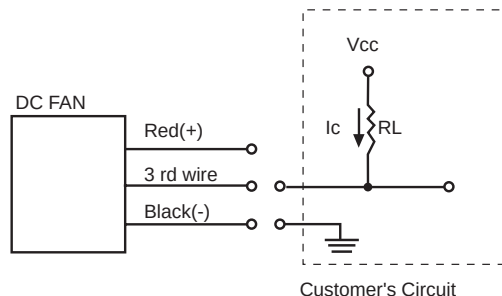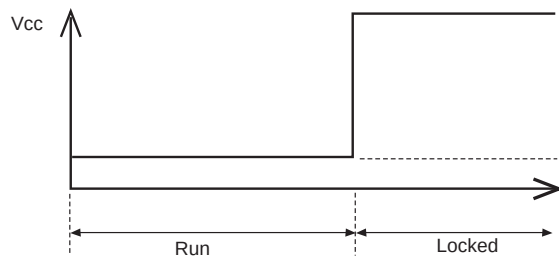

## ● F Type (Frequency Generator)

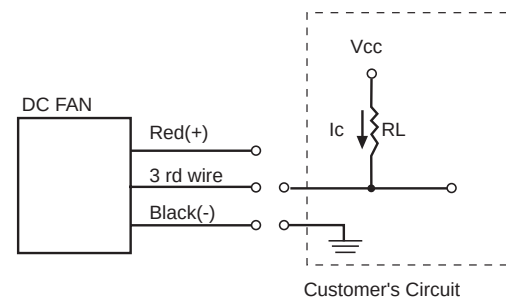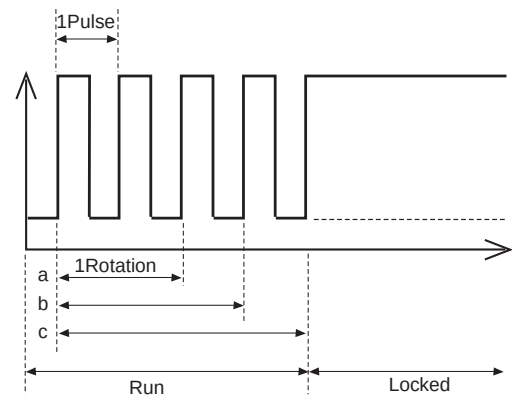

The relationship between rotation & output pulses signal from 3rd wire are as follows:

- (a) 1 Rotation=2 Pulses(4 poles' motor)
- (b) 1 Rotation=3 Pulses(6 poles' motor)
- (c) 1 Rotation=4 Pulses(8 poles' motor)


Notice:

For 8 poles' motor: normally, 1Rotation=4 pulses, if frequency divided circuit is implemented in this motor then 1Rotation=2 pulses.

## Safety



# DC Fan and Blower Model Numbering System

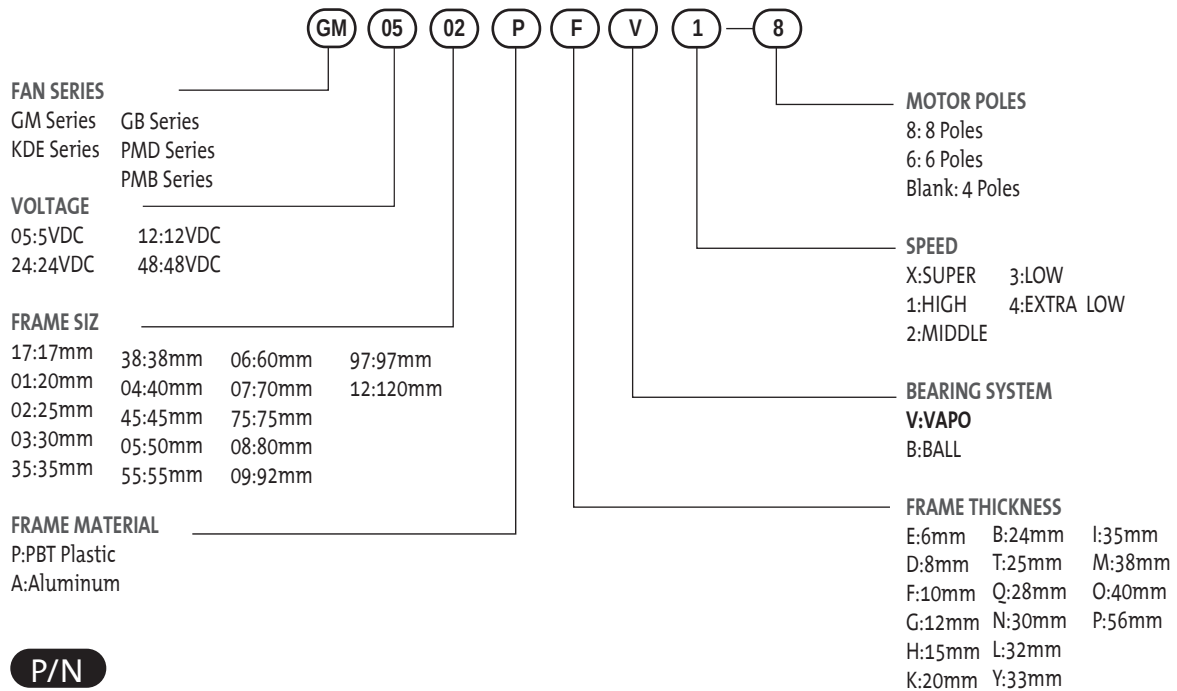

## P/N

Example: KDE1208PTV1 P/N:13.MS.A.GN

- 11/13 Motor model
- MS MagLev Design
- (2) Two ball bearing
- G Big hub
- (9) 9 Blades
- N Smaller hub
- A Auto restart
- F 3rd wire with frequency generation waveform
- R 3rd wire with rotation detector waveform
- U Upgrade
- GN RoHS compliance

## Sunon Connector recommendation

| Connector pitch | Manufacturer | Housing       | Terminal                                         |
|-----------------|--------------|---------------|--------------------------------------------------|
| 1.25mm          | HIROSE       | DF13-2S-1.25C | DF13-2630SCF                                     |
|                 | MOLEX        | 51021-0300    | 50058-8200                                       |
| 1.5mm           | JST          | ZHR-2         | SZH-002T-P0.5 or SZH-003T-P0.5                   |
| 2.0mm           | JST          | PHR-2         | SPH-002T-P0.5S                                   |
| 2.54mm          | ECI          | 2510-02       | 2511-P                                           |
|                 | Molex        | 50-57-9405    | 16-02-0069(70058-0004) or 16-02-0082(70058-0006) |
|                 | Molex        | 2695-02RP     | 2759T(39-00-0372)                                |
|                 | Molex        | 2695-03RP     | 2759T(39-00-0372)                                |
|                 | Molex        | 6471-021      | 4809-C-P914                                      |
|                 | Molex        | 6471-031      | 4809-C-P914                                      |
| 2.50mm          | JAM          | SC25-02HG     | 725462-2MA                                       |
|                 | JST          | SMR-02V-B     | SYM-001T-P0.6                                    |
|                 | JST          | XHP-2         | SXH-001T-0.6                                     |
|                 | JST          | EHR-2(H28J-2) | SEH-001T-P0.6                                    |
|                 | JST          | SMP-02V-BC    | SHF-001T-0.8BS                                   |
|                 | JWT          | A2502H02-2P   | A2502TOP-2                                       |
|                 | JWT          | A2502H02-3P   | A2502TOP-2                                       |
|                 | Molex        | 5051-02       | 2759T(39-00-0372)                                |
|                 | Molex        | 5264-02       | 5263PBT(08-70-1039)                              |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [sunon](#) manufacturer:***

Other Similar products are found below :

[MB50151V2-000U-A99](#) [3113HQ/MC40101V2-Q00U-S99](#) [UF3A3-700](#) [UB3H3-500](#) [PMB2475PNB3-AY.\(2\).GN](#) [KD1208PHB1.13.\(2\).GN](#)  
[KD1204PKB3 \(2\).GN](#) [GB1205PKV2-8AY.F.GN](#) [EE60251B1-000U-C99](#) [3236HQ/PF40281B1-D17U-S99](#) [A2175HBT-TC.R.GN](#) [B2-10](#)  
[SM203-13002](#) [PE80254V1-000U-A99](#) [GE80252B1-000U-AC9](#) [PF92251V1-1000U-A99](#) [ME80201V2-000U-A99](#) [PE92252B1-000C-AB9](#)  
[MC30101V2-000C-A99\(165mm\)](#) [MF20100V4-1Q04C-G99](#) [PE92254B2-000C-F99](#) [MC30150V1-000C-A99](#) [PE80252B1-000C-AB9](#)  
[MF20060V3-1Q07A-G99](#) [MC25100V2-000C-G99](#) [PMD2412PMB1-A\(2\).R.GN.I55](#) [AB1123-HST.GN](#) [PF80381BX-000U-A99](#) [MF25100V1-](#)  
[1000U-A99](#) [PF80251V1-1000U-F99](#) [PF92381B1-000U-A99](#) [VF40281BX-000U-A9H](#) [40HVH120M](#) [LA004-024A83DY](#) [SM203-14001Y](#)  
[MF80251V1-1000U-G99](#) [EE60251B2-000U-999](#) [SM203-13004Y](#) [SM205-13001](#) [F92-B](#) [FG-8/45](#) [LA004-011A99DN](#) [SF11592A-](#)  
[1092HSL.GN](#) [CF4113HBL-000U-ABD](#) [SF23092A-2092MBL.GN](#) [MF20100V1-1000U-A99](#) [DP203A-2123LBL.\(5\).GN](#) [PF40281B3-000U-](#)  
[A99](#) [LM310-001A99DN](#) [KD2406PKB2.\(2\).GN](#)