



ELECTRONICS, INC.  
44 FARRAND STREET  
BLOOMFIELD, NJ 07003  
(973) 748-5089  
<http://www.nteinc.com>

## NTE30030 thru NTE30036, NTE30044 Super Bright LED Indicators, 3mm

### **Features:**

- All Plastic Mold Type w/Water Clear Lens:  
 NTE30030 (Yellow Green, AlGaP/GaAs)  
 NTE30031 (Pure Green, GaN/GaN)  
 NTE30032 (Yellow, AlInGaP/GaAs)  
 NTE30033 (Orange, AlInGaP/GaAs)  
 NTE30034 (Deep Red, GaAlAs/GaAlAs)  
 NTE30035 (Amber, AlGaP/GaAs)  
 NTE30036 (Blue, GaN/GaN)  
 NTE30044 (White, GaN/GaN)

### **Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$ unless otherwise specified)

Reverse Voltage, $V_R$ .....	5V
Continuous Forward Current, $I_F$ NTE30030, NTE30032, NTE30033, NTE30034, NTE30035 .....	25mA
NTE30031, NTE30036, NTE30044 .....	30mA
Peak Forward Current (1.10 Duty Cycle, 0.1ms Pulse Width), $I_{FM}$ NTE30030, NTE30032, NTE30033, NTE30034, NTE30035 .....	50mA
NTE30031, NTE30036, NTE30044 .....	100mA
Power Dissipation, $P_D$ NTE30030, NTE30032, NTE30033, NTE30035 .....	100mW
NTE30034 .....	110mW
NTE30031, NTE30036, NTE30044 .....	120mW
Operating Temperature Range, $T_{opr}$ .....	-25°C to +85°C
Storage Temperature Range, $T_{stg}$ .....	-40°C to +100°C
Lead Temperature (During Soldering, .063 (1.6mm) from body, 5sec max), $T_L$ .....	+240°C

### **Electro-Optical Characteristics:** ( $T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage NTE30030	$V_F$	$I_F = 20\text{mA}$	-	2.2	2.4	V
NTE30031			-	3.5	4.0	V
NTE30032, NTE30035			-	2.0	2.4	V
NTE30033			-	2.0	2.6	V
NTE30034			-	1.86	2.5	V
NTE30036			-	3.5	4.0	V
NTE30044			3.0	3.3	4.0	V



**Electro–Optical Characteristics (Cont'd):** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Current All Devices	$I_R$	$V_R = 5\text{V}$	-	-	10	$\mu\text{A}$
NTE30031, NTE30036		$V_R = 4\text{V}$	-	-	60	$\mu\text{A}$
NTE30044 Only		$V_R = 5\text{V}$	-	-	50	$\mu\text{A}$
Luminous Intensity NTE30030	$I_V$	$I_F = 20\text{mA}$ , Note 1	-	1600	-	mcd
NTE30031			-	5000	-	mcd
NTE30032, NTE30033, NTE30035			-	2500	-	mcd
NTE30034			-	2000	-	mcd
NTE30036			1500	3000	-	mcd
NTE30044			6000	7000	-	mcd
Peak Emission Wave Length NTE30030	$\lambda_P$	$I_F = 20\text{mA}$	-	575	-	nm
NTE30031			-	523	-	nm
NTE30032			-	592	-	nm
NTE30033			-	620	-	nm
NTE30034			-	660	-	nm
NTE30035			-	607	-	nm
NTE30036			-	468	-	nm
NTE30044			CIE Coordinates, Typ		X: 0.28; Y: 0.30	
Dominate Wave Length (NTE30036 Only)	$\lambda_d(\text{HUE})$	$I_F = 20\text{mA}$ , Note 2	465	470	475	nm
Spectral Line Half Width NTE30030, NTE30033, NTE30034, NTE30035	$\Delta\lambda$	$I_F = 20\text{mA}$	-	20	-	nm
NTE30031			-	45	-	nm
NTE30032			-	25	-	nm
NTE30036			-	35	-	nm
NTE30044			-	22	-	nm
Viewing Angle NTE30030, NTE30031	$2\theta^{1/2}$	$I_F = 20\text{mA}$	-	14	-	deg.
NTE30032, NTE30033, NTE30035			-	10	-	deg.
NTE30034			-	19	-	deg.
NTE30036			-	15	-	deg.
NTE30044			-	30	-	deg.
Optic Rise Time (NTE30036 Only)	$\tau$	$I_F = 20\text{mA}$	-	30	-	ns



Note 1. Luminous intensity is measured with an Exeltron 2001.

Note 2. The dominate wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the color of the device.

**NTE30030 thru NTE30036**

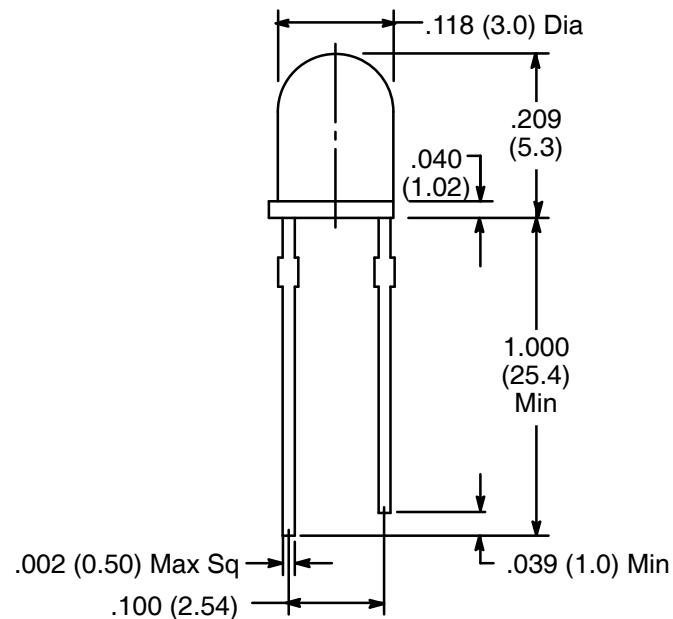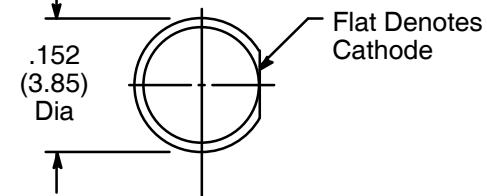

**NTE30044**

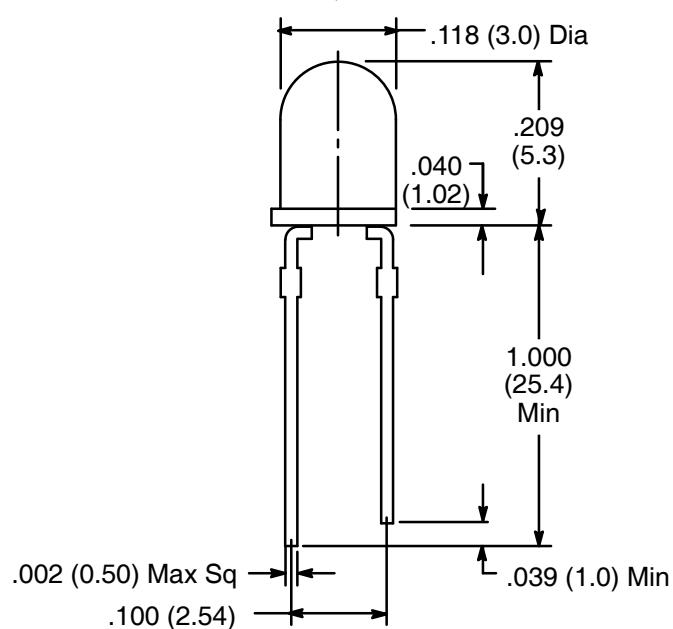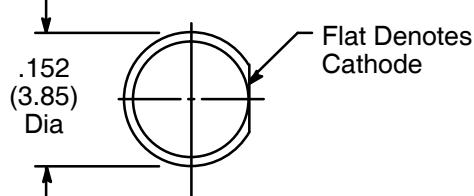

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [nte](#) manufacturer:***

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#)  
[5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#)  
[NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#) [04-SCBW25L-WH](#)