


Conductive Floor Mat for Hard Floors

Homogeneous conductive rubber construction of the Conductive Floor Mat for Hard Floors ensures rapid discharge from personnel wearing heel grounders. The low profile reduces trip hazards and is preferred for use with rolling carts or chairs. This mat is reversible. Conductive Floor Mat meets the ANSI/ESD S20.20 flooring required limit tested per ANSI/ESD STM7.1 and ESD TR53, and is suitable as the flooring component of a Footwear / Flooring personnel grounding system tested per ANSI/ESD STM97.1.



Made in the
United States of America

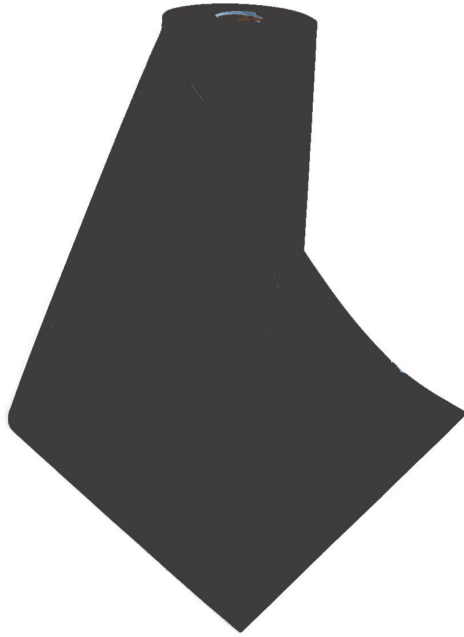

Mat Item Numbers

Size	Black
48" x 72" (1.2 m x 1.8 m)	COND4872FM

Mat Includes:

1 Mat, size as specified
2 [3034](#) Snap Fasteners (installed)

Mat Kit Item Numbers

Size	Black
36" x 60" (0.9 m x 1.5 m)	COND3660FM-F
48" x 72" (1.2 m x 1.8 m)	COND4872FM-F

Mat Kit Includes:

1 Mat, size as specified
1 [FGC151M](#) 15' (4.6 m) Ground Cord
2 [3034](#) Snap Fasteners (installed)

Roll Item Numbers

Size	Black
2' x 50' (0.6 m x 15.2 m)	COND24600FM
3' x 50' (0.9 m x 15.2 m)	COND36600FM
4' x 50' (1.2 m x 15.2 m)	COND48600FM

Roll Includes:

1 Roll of matting material, size as specified

Specifications	Typical Value	Test Method
Resistance to Ground point (Rtg)	$\leq 10^5$ ohms	ANSI/ESD STM7.1
Resistance Top to Top (Rtt)	$\leq 10^5$ ohms	ANSI/ESD STM7.1
Thickness*	0.060"	
Color*	Black	
Tolerance	Width ± 0.250 " Length ± 0.250 "	

*Color, texture and thickness may vary between lots and mills.

Specifications and procedures subject to change without notice.

CONDUCTIVE FLOOR MAT FOR HARD FLOORS

926 JR Industrial Drive, Sanford, NC 27332
WEB SITE: StaticControl.com
PHONE (919) 718-0000

**DRAWING
NUMBER**
CONDFM

DATE
November
2016

SCS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [3m manufacturer](#):

Other Similar products are found below :

[SC401U](#) [98-0003-3071-6](#) [80-0012-6467-2](#) [00-054007-70220-7](#) [00-054007-34717-0](#) [5952-3/4"x15yds](#) [021200-40230](#) [6840-2X50-GRAY](#)
[6A11-A0121-007.0-0](#) [701-W](#) [7993MP-2CIRCLE-100](#) [FDV14-187C](#) [8124/14](#) [812510-100](#) [8125/17](#) [813216](#) [8204-3LFM](#) [8425-8](#)
[MNG14BCX](#) [FP301-1/8-6"-Black](#) [FV14-6C](#) [920102-01-25-R](#) [927739-40](#) [929835-01-28-RK](#) [929974-01-40-R](#) [951240-2520-AR-PR](#)
[960X/980X](#) [98-0003-3075-7](#) [HF365/16SF](#) [HF36564-100](#) [HF625/26-30](#) [1/2-5-4492W](#) [1/2-5-5430](#) [1/2-5-850S](#) [1/2-5-3431](#) [12X12-6-4056B](#)
[12X12-6-433](#) [12X12-6-4930](#) [13-500-NB](#) [14526-EZ5B-300-02C](#) [1-4-4658F](#) [14520-EZAB-300-0EC](#) [DSTK9013-3420](#) [DSTK9015-3402](#)
[14T26-SZLB-200-0LC](#) [14T50-SZWB-100-0NC](#) [1-5-3437](#) [1-5-4943F](#) [1-5-363](#) [1-5-4959](#)