







#### Features

- Wide input range 180 ~ 528VAC
- · Constant Current mode output
- · Metal housing with Class I design
- · Built-in active PFC function
- IP67 / IP65 design for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
   3 in 1 dimming (dim-to-off); Timer dimming
- · Typical lifetime>50000 hours
- 5 years warranty

# Applications

- · LED street lighting
- LED high-bay lighting
- Parking space lighting
- · LED fishing lamp
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

## Description

HVGC-150 series is a 150W LED AC/DC LED power supply featuring the constant current mode and high voltage output. HVGC-150 operates from 180~528VAC and offers models with different rated current ranging between 350mA and 1400mA. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for -40°C ~ +80°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HVGC-150 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

# ■ Model Encoding



Type	IP Level	Function	Note
Α	IP65	Io adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request


# **SPECIFICATION**

MODEL		HVGC-150-350		HVGC-150-500	]	HVGC-150-700		HVGC-150-1050	HVGC-150-1400		
	RATED CURRENT	350mA		500mA		700mA		1050mA	1400mA		
ОИТРИТ	RATED POWER	149.8W		150W		150.5W		150.15W	149.8W		
	CONSTANT CURRENT REGION Note.2	42 ~ 428V		30 ~ 300V		21 ~ 215V		15 ~ 143V	12 ~ 107V		
		Adjustable for A-T	ype only	y (via built-in poten	tiomete	r)		1			
	CURRENT ADJ. RANGE	210 ~ 350mA		300 ~ 500mA		420 ~ 700mA		630 ~ 1050mA	840 ~ 1400mA		
	CURRENT RIPPLE Note.5	8.0% max. @ rated current									
	CURRENT TOLERANCE	±5.0%									
	SET UP TIME Note.4	500ms/230Vac 400ms/347VAC,480VAC									
INPUT		180 ~ 528VAC 254VDC ~ 747VDC									
	VOLTAGE RANGE Note.3										
	FREQUENCY RANGE	47 ~ 63Hz									
		$PF \ge 0.98/230VAC$ , $PF \ge 0.97/277VAC$ , $PF \ge 0.95/347VAC$ , $PF \ge 0.93/480VAC$ @full load									
	POWER FACTOR (Typ.)	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)									
		THD< 20%(@ load≥50%/230VAC, 277VAC, 347VAC; @ load≥75%/480VAC)									
	TOTAL HARMONIC DISTORTION	(Please refer to "TOTAL HARMONIC DISTORTION (THD)" section)									
	EFFICIENCY (Typ.)	91%		91%		91%		90%	90%		
	AC CURRENT (Typ.)	0.5A / 347VAC	0.38	A / 480VAC		<b>'</b>					
	INRUSH CURRENT (Typ.)	COLD START 35A(twidth=790µs measured at 50% lpeak) at 480VAC; Per NEMA 410									
	MAX. No. of PSUs on 16A										
	CIRCUIT BREAKER	4 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 480VAC									
	LEAKAGE CURRENT <0.75mA / 480VAC										
PROTECTION	SHORT CIRCUIT	Constant current	limiting,	recovers automati	cally aft	er fault condition is	remove	ed			
		430 ~ 460V		316 ~ 346V		226 ~ 247V		151 ~ 165V	113 ~ 124V		
	OVER VOLTAGE	Shut down o/p vo	Itage wit	th auto-recovery o	re-pow	er on to recovery					
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down									
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)									
	MAX. CASE TEMP.	Tcase=+80°C									
	WORKING HUMIDITY	20 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)									
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes									
SAFETY & EMC	SAFETY STANDARDS UL8750(type"HL"), CSA C22.2 No. 250.0-08, TUV EN61347-1, EN61347-2-13, IP65 or IP67 approved										
	WITHSTAND VOLTAGE I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC										
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG; O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH									
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (@ load ≥ 50%); EN61000-3-3, FCC part 15 class B									
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, light industry level (surge immunity Line-Earth 4KV, Line-Line 2KV)									
OTHERS	MTBF	179.5K hrs min. MIL-HDBK-217F (25°C)									
	DIMENSION	245*68*38.8mm (	L*W*H)								
	PACKING	1.24Kg; 12pcs/15	.9Kg/0.7	78CUFT							
NOTE	1. All parameters NOT specially mentioned are measured at 347VAC input, rated current and 25°C of ambient temperature.										
NOTE	2. Please refer to "DRIVING METHODS OF LED MODULE".										
	3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.										
	4. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.  5. Current ripple is measured between 50×100% of maximum voltage under rated power delivery.										
		<ul><li>5. Current ripple is measured between 50~100% of maximum voltage under rated power delivery.</li><li>6. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the</li></ul>									
	complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.										
	7. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently										
	connected to the mains.										
	8. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 80 °C or less.										
	Please refer to the warranty	statement on MEAN WELL's website at http://www.meanwell.com									




# **■** Block Diagram

PFC fosc: 130KHz PWM fosc: 70KHz

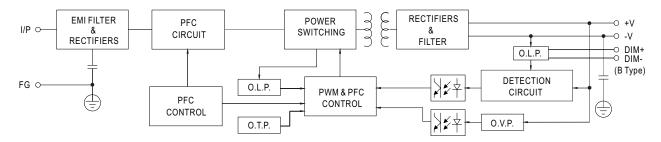

## **■** DRIVING METHODS OF LED MODULE

※ This series works in constant current mode to directly drive the LEDs.

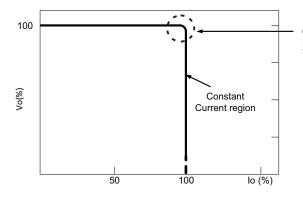


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




# **■ DIMMING OPERATION**




#### imes 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- · Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply:  $100\mu A$  (typ.)
- O Applying additive 0 ~ 10VDC

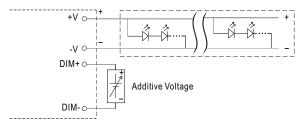


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

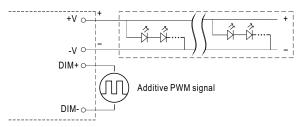



"DO NOT connect "DIM- to -V"

O Applying additive resistance:

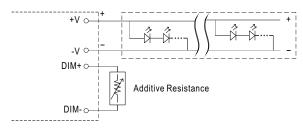

"DO NOT connect "DIM- to -V"






100%
90%
80%
70%
60%
50%
10%
20%
Short 10KIN 20KIN 30KIN 40KIN 50KIN 60KIN 70KIN 80KIN 90KIN 100KIN (Nedriver quantity for synchronized dimming operation)
Dimming input: Additive resistance

Note: 1. Min. dimming level is about 6% and the output current is not defined when 0% < Iout < 6%.


2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



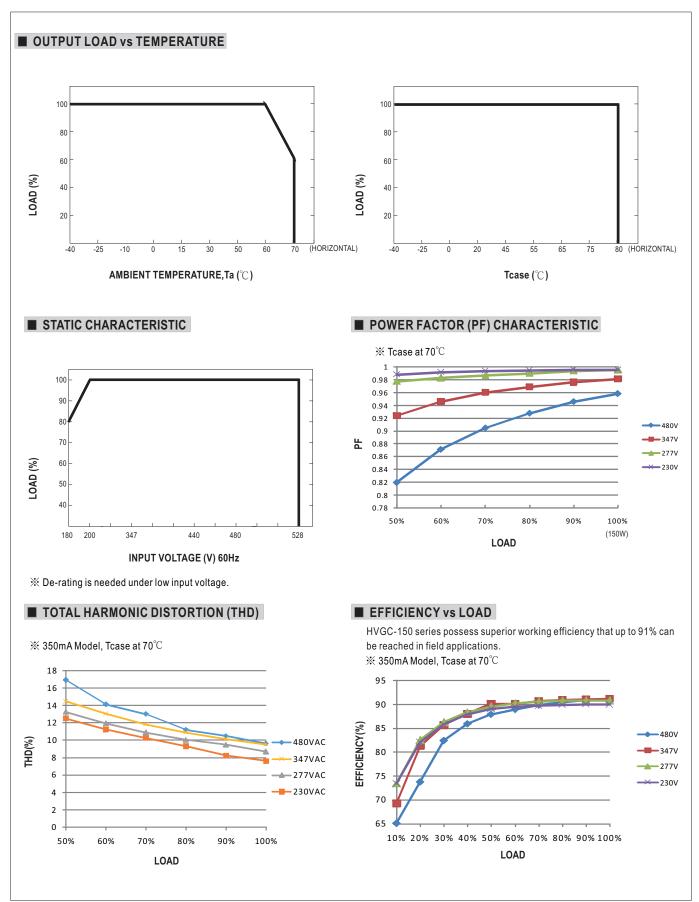




# ■ LIFE TIME

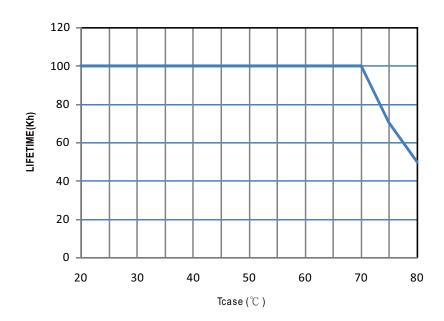





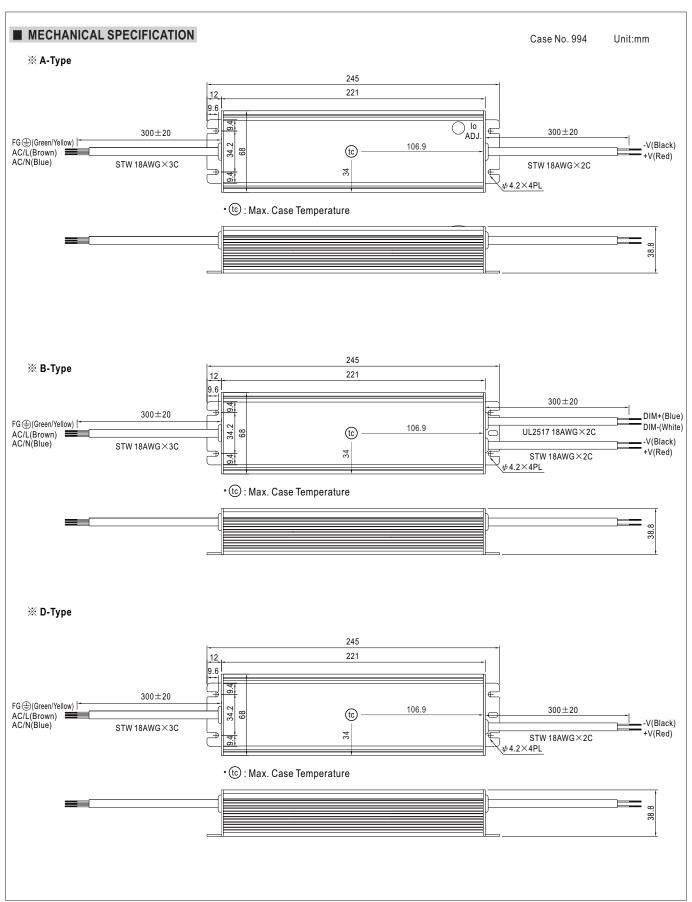


LED Lamp



## ■ WATERPROOF CONNECTION

#### ※ Waterproof connector

Waterproof connector can be assembled on the output cable of HVGC-150 to operate in dry/wet/damp or outdoor environment.

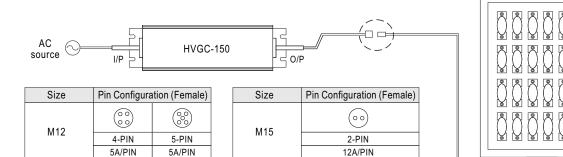


Order No.

Suitable Current

#### **X** Cable Joiner

Order No.

Suitable Current

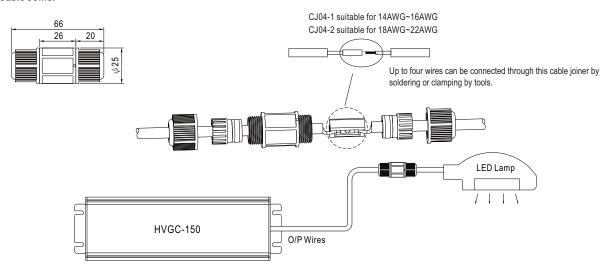

M15-02

12A max

CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.


M12-05

10A max.

M12-04

10A max.

#### **※** Junction Box Option

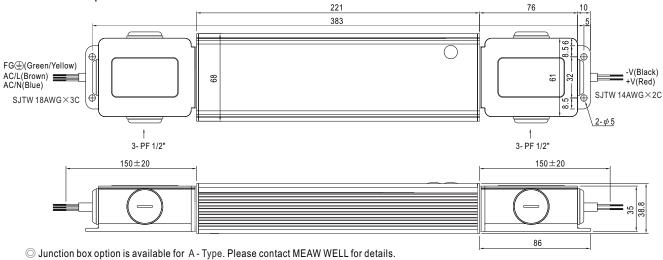

## ■ INSTALLATION MANUAL

Please refer to: http://www.meanwell.com/webnet/search/InstallationSearch.html