

1. SPECIFICATION

AC-1205G-N1LF


ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	5	 Standard state, standard drive circuit. Square wave 1/2 duty.
02	Operating Voltage	V	3 ~ 8	
03	Consumption Current	mA Max.	40	
04	Sound pressure level (Distance at 10cm)	dB(A) Min.	85	Rated voltage, rated frequency.
05	Direct Current Resistance	Ω	40±6	
06	Rated Frequency	Hz	2400	

REV NO.

REVISION NOTE

APPROVAL

DATE

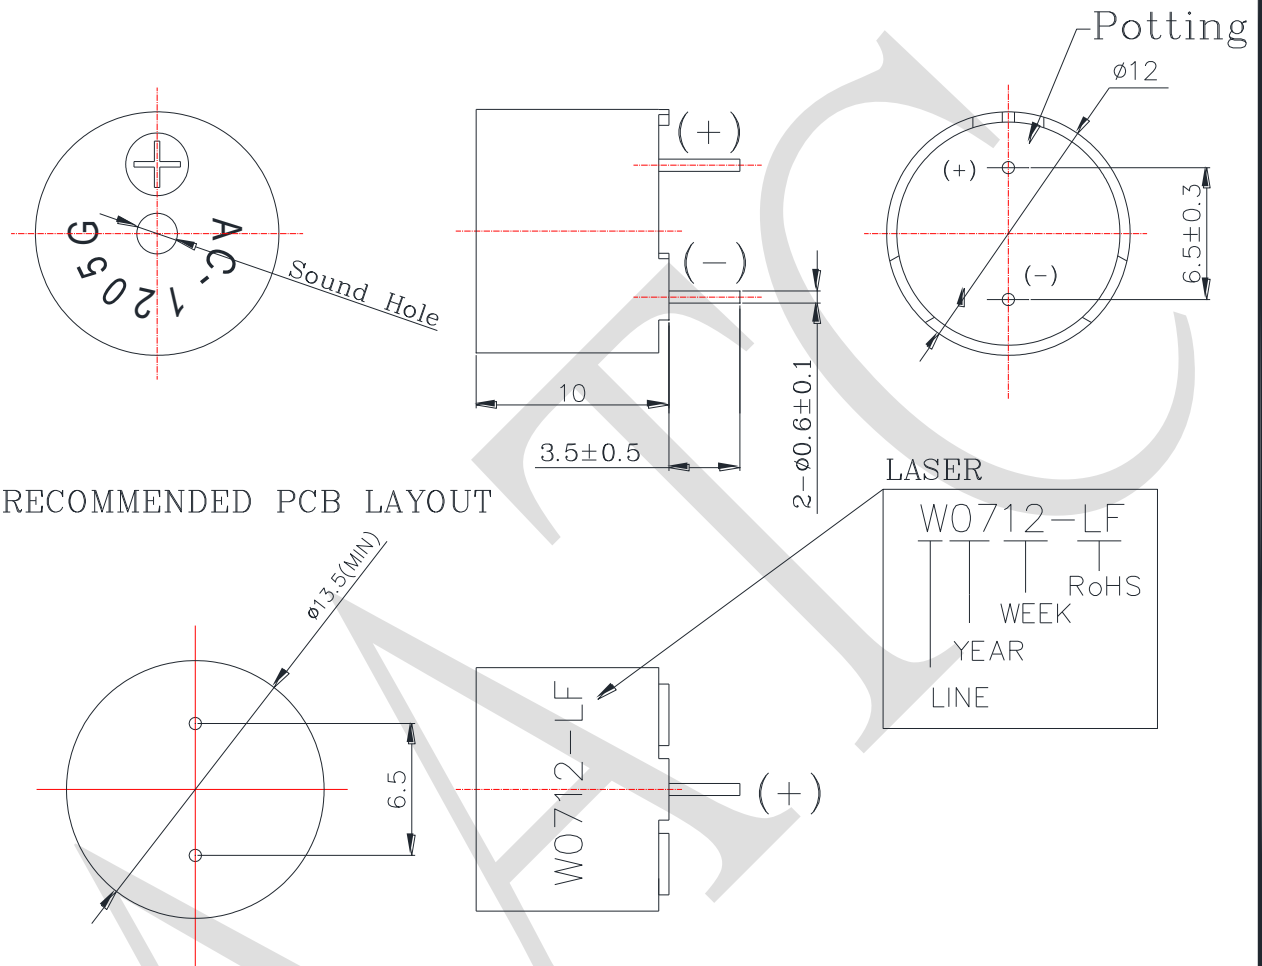

RECOMMENDED PCB LAYOUT

LASER

W0712-LF
 WEEK
 YEAR
 LINE
 RoHS

RoHS

TITLE: MAGNETIC BUZZER		DRAWN: Handk	2020/02/19	SCALE: 3:1	SHEET: 1 OF 1
PART NO. AC-1205G-N1LF	6	DESIGNED: R&D OF AAT		UNITS: mm	
DWG NO. UGCM1205AP3.5BH10-R40		CHECKED:		TOLERANCE ± 0.5	
		APPROVAL:		UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL $\pm$ *** TWO PLACE DECIMAL $\pm$ *** THREE PLACE DECIMAL $\pm$ ***	
	REV	MATERIAL: PBT			



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Board Mount](#) *category:*

Click to view products by [AATC](#) *manufacturer:*

Other Similar products are found below :

[FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PT-3534FP](#) [SC110E](#) [SC616N-2](#) [SCS045MD9DT3S](#) [F/BC 35-DR LF](#) [F/EB20P-DR LF](#)
[FSMD8585JSLF](#) [F/TCW 05 WITH LABEL LF](#) [F/TCW 12 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#) [F/HCW 06 WITH LABEL LF](#) [DMT-1606S-NL](#) [SBM616J](#) [SBM616PU](#) [SC250H](#) [SC628FK](#)
[32S4120LFPN](#) [PLD-27N35PQ](#) [SMA-17-S](#) [SC235AF](#) [SMA21-P175](#) [1602AC-23-18E-26.000000G](#) [710000013](#) [710100108](#) [710121005](#)
[205311](#) [HNR-1704A](#) [KC1206 16](#) [FUET-1760](#) [FUET-1030H](#) [CPT-1117-83-SMT-TR](#) [CMA-6542PF](#) [CEM-1212S](#) [CMT-4023S-SMT-TR](#)
[CMT-8504-100-SMT-TR](#) [CX-0905C](#) [FMB09A12-12V](#) [FSD-5037](#) [FUET-1365F-05](#) [FSD-3020-12V](#) [SEA-0955Y-0527-16-50P4.0](#) [KC1206R](#)
[42](#) [FSD-2316-24V](#) [LEB1370BS-1.5S-2.4-R](#) [LEB1310BS-05S-2.4-R](#)