


Plastic bodied limit switch Series C74


Description **C74-EB-U2Z**

Article number **6106201155**


Operating symbol



Operating diagram

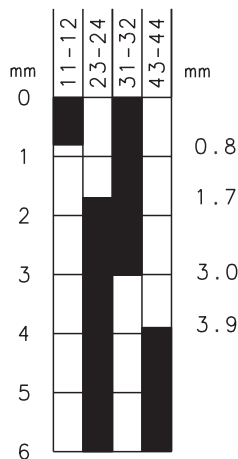

  Tolerance:
 On Off Operating point $\pm 0,25$ mm;
 Actuating force: ± 10 %

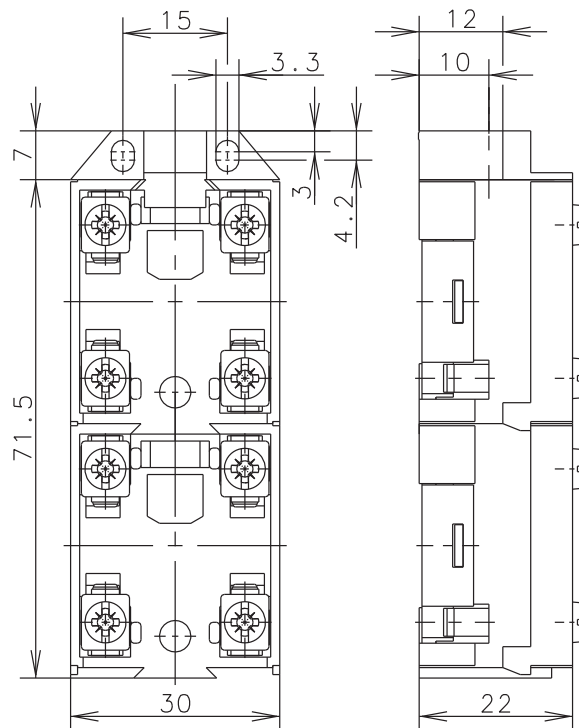

Electrical Data

Rated insulation voltage	U_i	400 V AC
Conv. thermal current	I_{the}	10 A
Rated operational voltage	U_e	240 V AC
Utilization category		AC-15, U_e / I_e 240 V/ 3 A
Positive opening NC contact		acc. IEC/EN 60947-5-1, annex K
Short-circuit protective device		Fuse 10 A gG

Mechanical data	
Enclosure	Thermoplastic, glass fibre reinforced
Actuator	Plunger inside located, Ø 8
Ambient air temperature	-30 °C ... +80 °C
Contact type	2 NC, 2 NO (Zb)
Mechanical life	10 x 10 ⁶ switching cycles
Switching frequency	≤ 100/min
Assembly	2 x M3
Connection	8 screw connections (M3,5)
Conductor cross-sections	Solid: 0.5 ... 1.5 mm ² Litz wire with ferrules: 0.5 ... 1.5 mm ²
Weight	≈ 0,06 kg
Installation position	Operator definable
Protection type	IP00 acc. to EN 60529; DIN VDE 0470 T1

Actuation	
Actuating the device is possible only in direction of the plunger.	

ID for safety engineering	
B10d	20 x 10 ⁶ cycles

Standards	
	VDE 0660 T100, DIN EN 60947-1, IEC 60947-1
	VDE 0660 T200, DIN EN 60947-5-1, IEC 60947-5-1
	DIN EN ISO 13849-1

EU Conformity	
	acc. to directive 2014/35/EU

Approvals	
	CCC

Notes	
Because of the open construction of the device there is no special protection against ingressing of water and touching parts under voltage.	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circuit Breaker Accessories](#) category:

Click to view products by [Altech](#) manufacturer:

Other Similar products are found below :

[CSC-403PS](#) [D11CEU1](#) [8T1-E-125](#) [CAP-16-3P-BK-PB](#) [8C1-C-721](#) [8T1-E-275](#) [8T1-E-278](#) [A01ED62](#) [FAS-001](#) [FBS0054](#) [506-11315-001](#)
[3803221](#) [6720005316](#) [9-1393249-0](#) [802-ESB50UL489](#) [X22261102](#) [HSP6/10U](#) [DB16/BU](#) [601.1231.909](#) [3PRG1](#) [3PLBR4LU](#) [3803241](#)
[2624.0](#) [1-1423696-8](#) [X20080104](#) [Y30028402](#) [DKR2](#) [8T1-E-114](#) [SF06-5,08](#) [ZG20-2](#) [3PSML401](#) [3PSML402](#) [PAM-1](#) [930136101](#) [CMB4/W](#)
[315.1100.012](#) [640.2042.068](#) [618.6135.060](#) [618.6335.253](#) [610.6201.155](#) [618.1935.210](#) [655.1955.001](#) [PPCX4](#) [CM1.5S2](#) [CX4/R](#) [CX2.5/4/BL](#)
[795-030](#) [38673](#) [CA727/5](#) [UTE100N-FMU-80](#)