
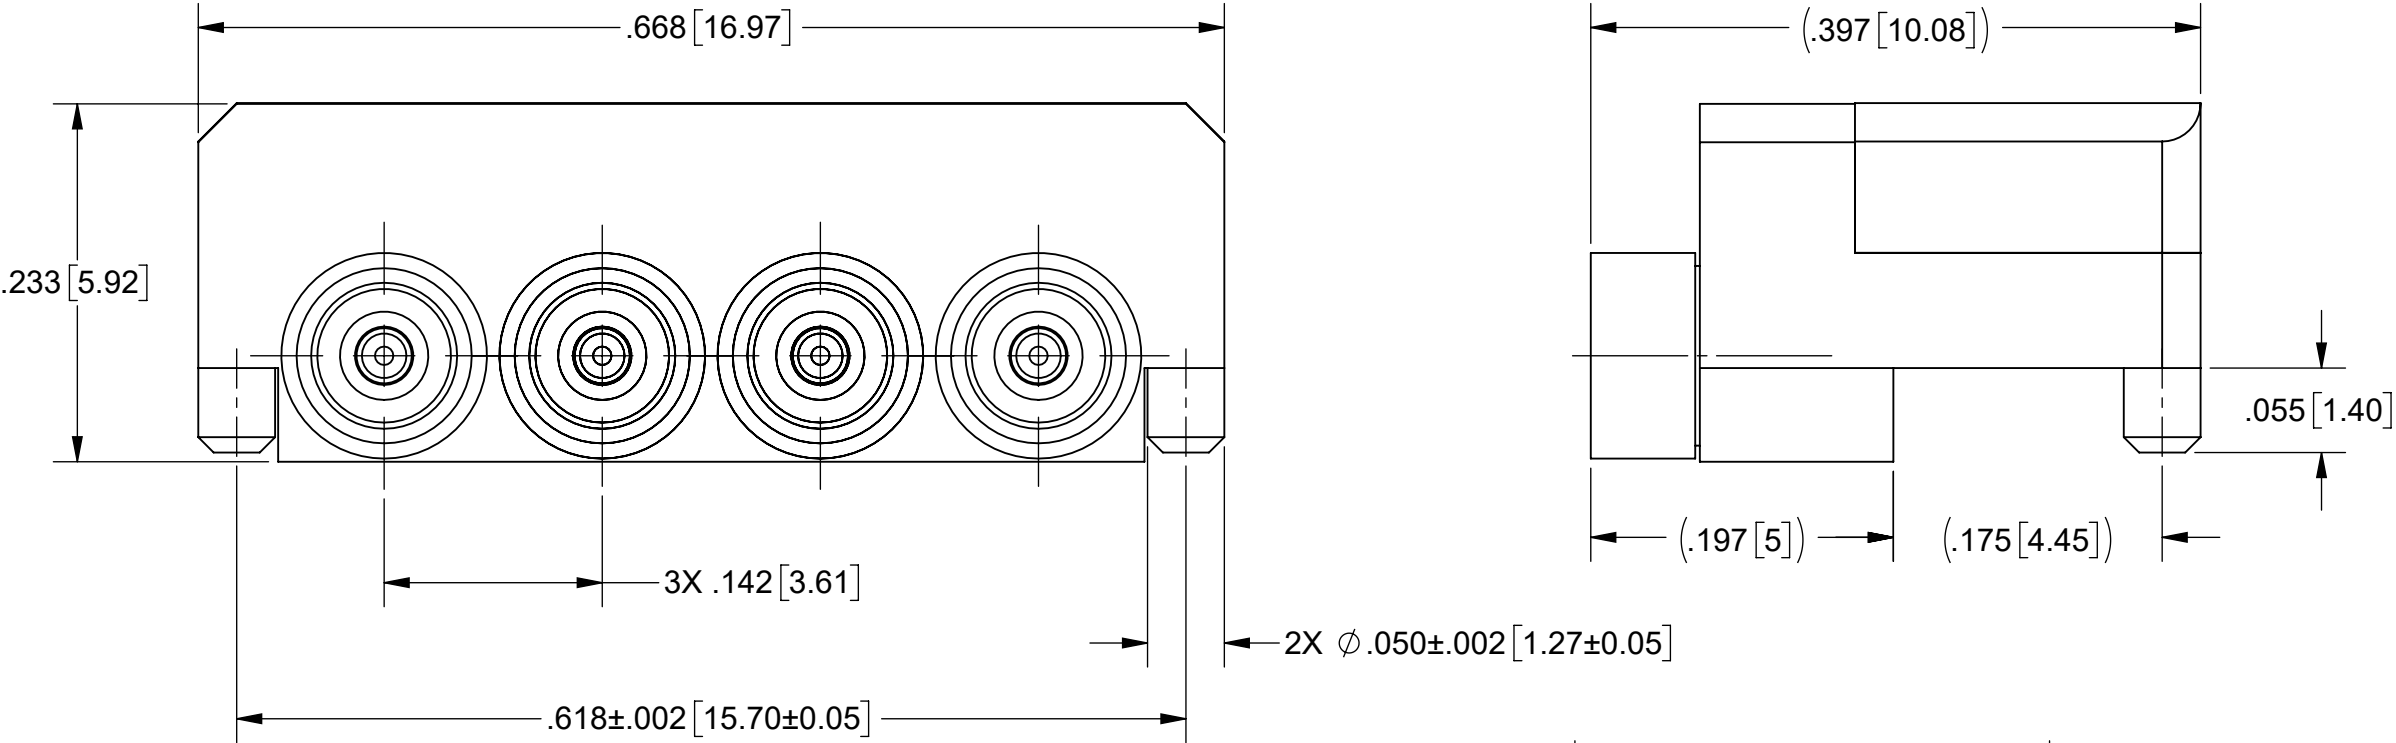


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 48960	02/25	SEE PDM

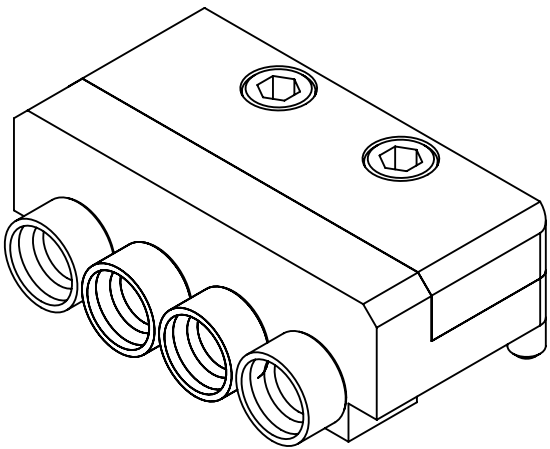

MATERIAL:

BODY, SCREWS, PLATE & SHROUDS:	STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1
CONTACTS:	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
INSULATORS:	PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B
EMI GASKET:	CONDUCTIVE POLYMER

FINISH:

BODY, SHROUDS, PLATE & CONTACTS:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.
--	--

SCREWS:	PASSIVATED PER ASM 2700, TYPE 2
---------	---------------------------------


PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 40.0 GHz

NOTES:

- FOR OPTIMAL CROSSTALK AND EMI SHIELDING, PCB MUST BE EDGE PLATED.
- EMI LID TO BE INSTALLED AFTER REFLOW AND SOLDER JOINT INSPECTION.
- FOR A FOOTPRINT RECOMMENDATION SPECIFIC TO YOUR PCB, PLEASE CONTACT US AT applications@svmicro.com

SV P/N	INTERFACE
9311-60343	SMOOTH BORE
9311-60344	FULL DETENT

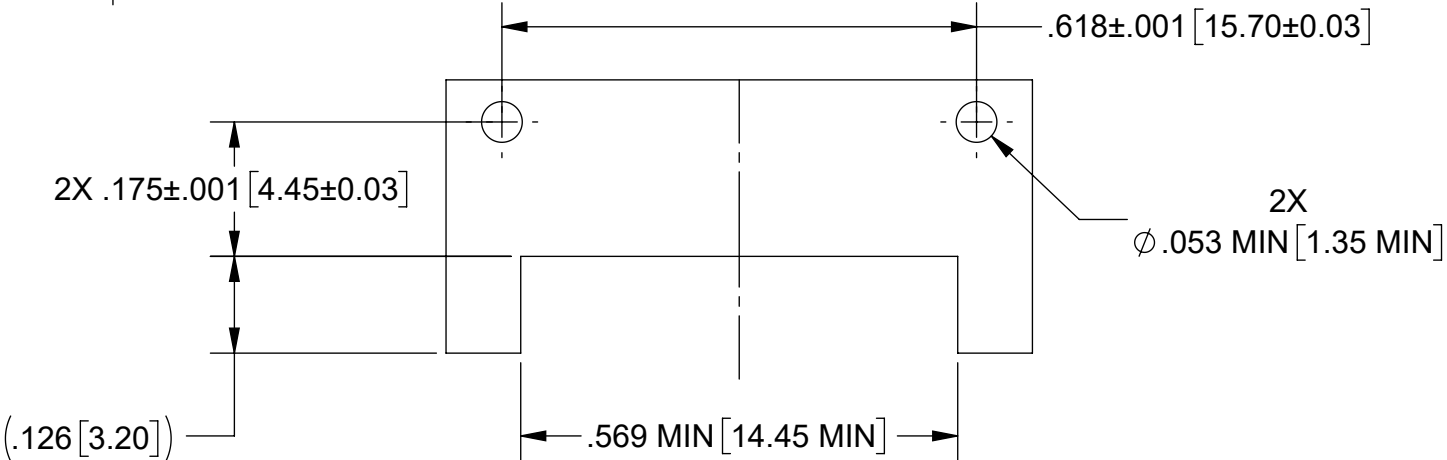

RECOMMENDED MOUNTING PATTERN

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIED		 www.svmicrowave.com TITLE: 4 PORT SMPM MALE EDGE PCB MOUNT		
FINISH:	SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' 					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) ***category:***

Click to view products by [Amphenol](#) ***manufacturer:***

Other Similar products are found below :

[6002-7051-003](#) [6059674-1](#) [630059-000](#) [M55339/15-00491](#) [7002-1541-010](#) [7002-1572-002](#) [7003-1572-002](#) [7004-1512-000](#) [7009-1511-004](#)
[7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7405-1521-005](#) [7405-1521-019](#) [7405-1521-802](#) [755-74-5](#) [7706-2](#) [873183](#)
[PL375-33](#) [95-850-148-3](#) [R107003010W](#) [R112186000](#) [R113082097](#) [R113236000](#) [R113240097](#) [R114083000](#) [R114670000W](#) [R121053000](#)
[R124072220W](#) [R124076450](#) [R124175123](#) [R125075001](#) [R125414001](#) [R125415030](#) [R125415271](#) [R141007161](#) [R141574161W](#)
[R142004000W](#) [R142076000W](#) [R142076161W](#) [R142184000W](#) [R142676700](#) [R143012000](#) [R143075000W](#) [R143089117](#) [R143235161W](#)
[R143292700](#) [R143557000](#) [R161008000](#)