


ACA 3100E-B

wall mount receptacle for front panel mounting

- Receptacle with cable clamp and telescopic bushing
- Includes grommet and grommet sleeve
- Four through mounting holes or optional metric threaded holes

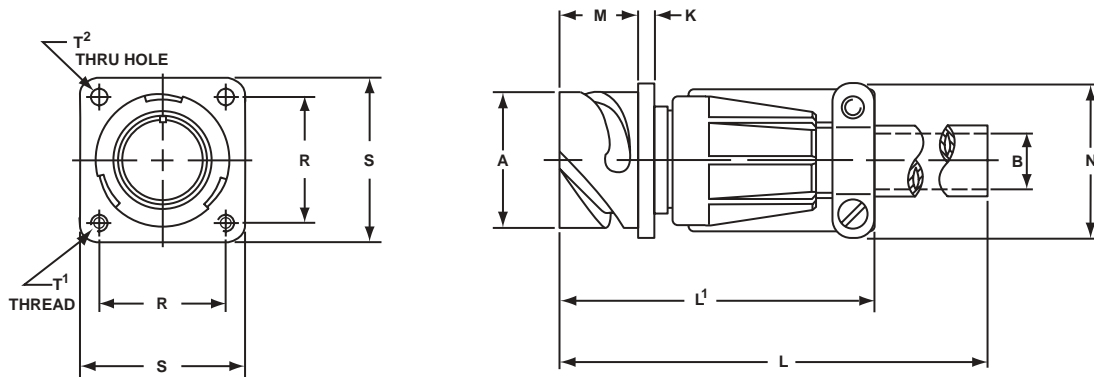

Inches

Shell Size	A + .000 - .006	B Max.	K ± .008	L Max.	L ¹ Max.	M + .016 - .000	N Max.	R ± .004	S ± .012	T ² Thru Hole + .004 - .000
10SL	.717	.256	.110	4.720	2.362	.559	.894	.717	1.000	.126
14S	.969	.354	.126	4.720	2.440	.559	1.083	.906	1.181	.126
16S	1.079	.433	.126	4.720	2.756	.559	1.181	.969	1.280	.126
16	1.079	.433	.126	4.921	2.756	.748	1.181	.969	1.280	.126
18	1.213	.559	.157	4.921	3.031	.748	1.300	1.063	1.378	.126
20	1.346	.622	.157	4.921	3.031	.748	1.476	1.157	1.496	.126
22	1.472	.622	.157	4.921	3.031	.748	1.476	1.252	1.614	.126
24	1.610	.843	.157	4.921	3.346	.811	1.705	1.374	1.752	.146
28	1.839	.843	.157	4.921	3.346	.811	1.705	1.563	2.000	.146
32	2.102	1.051	.157	4.921	3.346	.874	2.035	1.752	2.244	.169
36	2.346	1.248	.157	5.315	4.134	.874	2.283	1.937	2.500	.169

Millimeters

Shell Size	A + 0.00 - 0.15	B Max.	K ± 0.2	L Max.	L ¹ Max.	M + 0.4 - 0.0	N Max.	R ± 0.1	S ± 0.3	T ¹ Metric Thread	T ² Thru Hole + 0.1 - 0.0
10SL	18.2	6.5	2.8	120	60	14.2	22.7	18.2	25.4	M4	3.2
14S	24.6	9.0	3.2	120	62	14.2	27.5	23.0	30.0	M4	3.2
16S	27.4	11.0	3.2	120	70	14.2	30.0	24.6	32.5	M4	3.2
16	27.4	11.0	3.2	125	70	19.0	30.0	24.6	32.5	M4	3.2
18	30.8	14.2	4.0	125	77	19.0	33.0	27.0	35.0	M4	3.2
20	34.2	15.8	4.0	125	77	19.0	37.5	29.4	38.0	M4	3.2
22	37.4	15.8	4.0	125	77	19.0	37.5	31.8	41.0	M4	3.2
24	40.9	21.4	4.0	125	85	20.6	43.3	34.9	44.5	M5	3.7
28	46.7	21.4	4.0	125	85	20.6	43.3	39.7	50.8	M5	3.7
32	53.4	26.7	4.0	125	85	22.2	51.7	44.5	57.0	M5	4.3
36	59.6	31.7	4.0	135	105	22.2	58.0	49.2	63.5	M5	4.3

All dimensions for reference only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-202-1200](#) [0134-207-1206](#) [0134-207-1800](#) [0134-207-2207](#) [0134-213-0806](#) [0134-213-1007](#) [0134-213-1009](#) [0134-213-1208](#) [0134-213-1800](#) [0134-213-2209](#) [0025-258-000](#) [015-9516-002](#) [60-042722-19P](#) [0114-201-1278](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-201-1806](#) [0134-201-2006](#) [0134-201-2007](#) [0134-201-2010](#) [0134-202-1400](#) [0134-207-0809](#) [0134-207-1208](#) [0134-207-2009](#) [0134-213-1006](#) [6104-207-2302](#) [6104-208-1902](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-207-13149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-220-25149P](#) [6131-259-11149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-263-19149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3102A-20-15P](#) [CS3102A-20-15S](#) [CS3102C18-4P-472](#) [CS3106A-20-29P](#) [CS3106A-20-74P](#)