

- † Red band indicates fully mated
- †† Blue band indicates rear release contact retention system
- ★ .059 dia min.
- 1.5 dia min., 3 lockwire holes formed lockwire hole design (6 holes) is optional

Note: -Drawing not to Scale
 -Dimensions subject to change
 -Dimensions are in Inches, Millimeters (MM) & Blue color
 Property of Amphenol Aerospace.
 All rights reserved.

Part No.:
D38999/24KF32SA

Amphenol
 Aerospace
 40-60 Delaware Avenue
 Sidney, NY 13838-1395
 800-678-0141
 Cage Code: 77820
 www.amphenol-aerospace.com



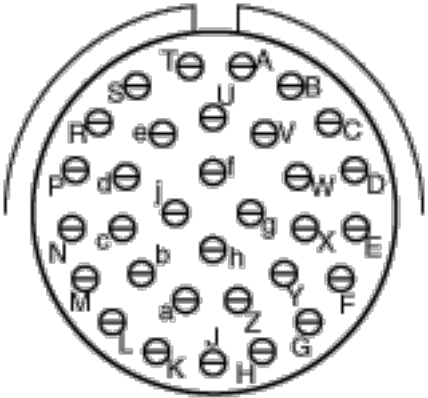
Amphenol Aerospace
 40-60 Delaware Avenue
 Sidney, NY 13838-1395
Phone: 800-678-0141 - **Fax:** 607-563-5157
Email: info@amphenol-aerospace.com
Website: www.amphenol-aerospace.com

Matthew Mullins
 Product Line Manager
 Core Products
Phone: 607-563-5673
Email: mmullins@amphenol-aa.com

Specifications

Connector Type	D38999/
Shell Style	Jam Nut Receptacle
Shell Material	Steel
Shell Finish	Passivated Stainless Steel
Insulation Resistance	5000 megohms min. @500 VDC25C
Operating Temperature [Min]	-65°C
Operating Temperature [Max]	+200°C
Shielding Effectiveness	45dB@10GHz
Durability	500 Hour Salt Spray
Contact Type	S
Contact Description	Socket Contacts

Contacts

Insert Arrangement	
Shell Size	F
Insert Arrg	32
Service Rating	I
Total # Contacts	32
Test Current	7.5 AMPS
Wire Size for 20	24, 22, 20
Contact Size16	32
Number of Contacts	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-202-1200](#) [0134-207-1206](#) [0134-207-1800](#) [0134-207-2207](#) [0134-213-0806](#) [0134-213-1007](#) [0134-213-1009](#) [0134-213-1208](#) [0134-213-1800](#) [0134-213-2209](#) [0025-258-000](#) [015-9516-002](#) [60-042722-19P](#) [0114-201-1278](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-201-1806](#) [0134-201-2006](#) [0134-201-2007](#) [0134-201-2010](#) [0134-202-1400](#) [0134-207-0809](#) [0134-207-1208](#) [0134-207-2009](#) [0134-213-1006](#) [6104-207-2302](#) [6104-208-1902](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-207-13149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-220-25149P](#) [6131-259-11149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-263-19149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3102A-20-15P](#) [CS3102A-20-15S](#) [CS3102C18-4P-472](#) [CS3106A-20-29P](#) [CS3106A-20-74P](#)