
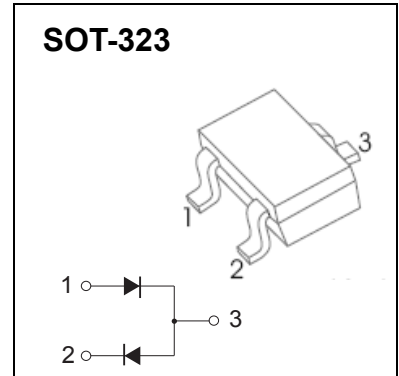


FEATURES

- Small package
- Low V_F and low I_R
- High reliability

MARKING: 3J •







Maximum Ratings @Ta=25°C

Parameter	Symbol	Limit	Unit
Peak reverse voltage	V_{RM}	45	V
DC reverse voltage	V_R	40	V
Mean rectifying current	I_O	30	mA
Non-repetitive Peak Forward Surge Current@t=8.3ms	I_{FSM}	200	mA
Power dissipation	P_D	200	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	500	°C/W
Junction temperature	T_j	125	°C
Storage temperature	T_{stg}	-55+150	°C


Electrical Ratings @Ta=25°C

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Forward voltage	V_F			0.37	V	$I_F=1mA$
Reverse current	I_R			1	μA	$V_R=10V$
Capacitance between terminals	C_T		2		pF	$V_R=1V, f=1MHz$

Typical Characteristics

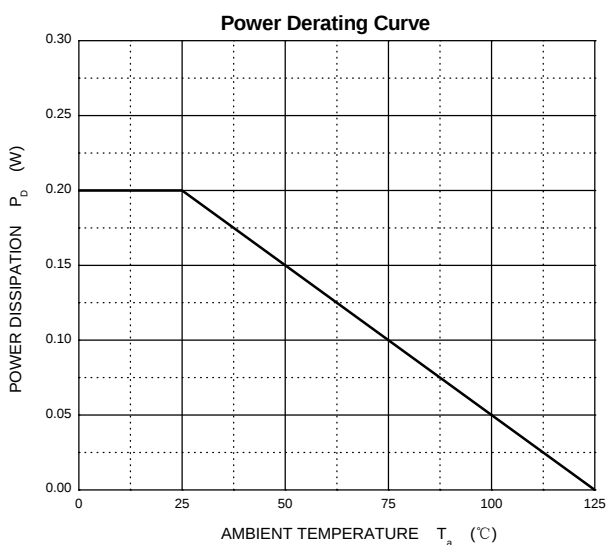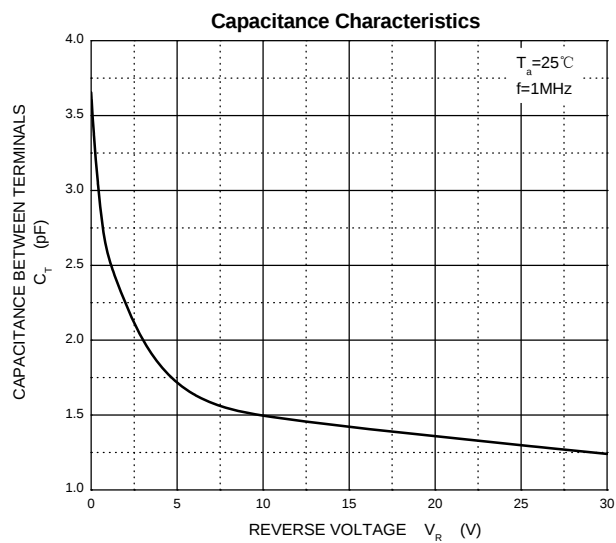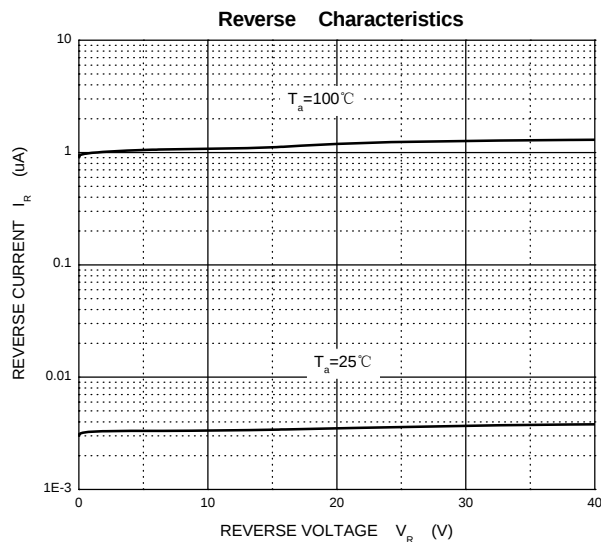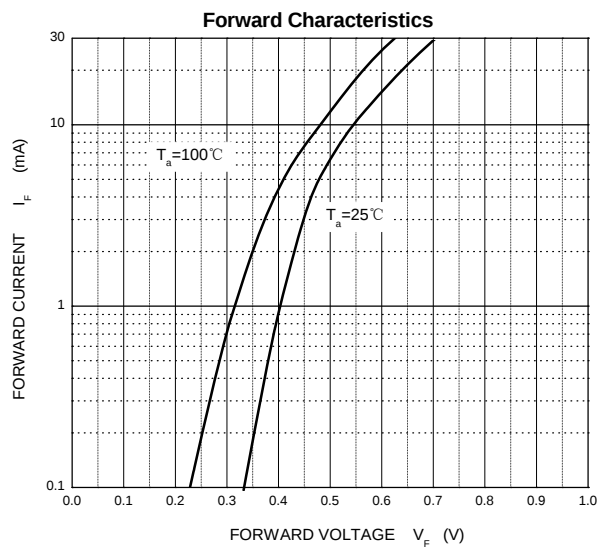


SOT-323 Package Outline Dimensions

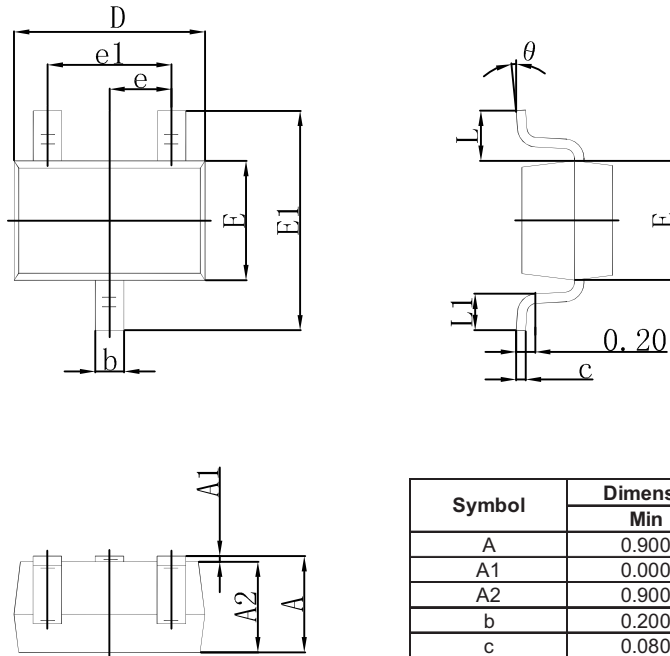

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-323 Suggested Pad Layout



Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [anbon](#) manufacturer:

Other Similar products are found below :

[AU6N70S](#) [MBR2045CT](#) [AU10N65S](#) [GBU810](#) [AS2312](#) [AS2102W](#) [RB706F-40](#) [AS3442](#) [SMAJ7.5CA](#) [SMF5.0A](#) [SMBJ200A](#) [SMAJ30A](#)
[BAV99](#) [DSK14](#) [BSS123](#) [SMAJ17CA](#) [SMBJ14CA](#) [AU4N60S](#) [AF8N60S](#) [SMAJ13CA](#) [SMAJ48A](#) [SL24-F](#) [SMF28CA](#) [GBU1010](#) [2SC3356](#)
[SMBJ24CA](#) [SMCJ12A](#) [AS3418](#) [SMF8.0CA](#) [SMAJ26A](#) [SMF36A](#) [SMBJ48A](#) [KBL410](#) [AS2341](#) [DSK26](#) [SMF48CA](#) [AS3523](#) [BC807-25](#)
[SMBJ10A](#) [MURS260-B](#) [SMAJ12A](#) [SMBJ43CA](#) [BAT43WS](#) [SS26-B](#) [SMF10CA](#) [SMAJ10CA](#) [SMAJ12CA](#) [BZT52C5V1S](#) [AS3100](#)
[SMF40CA](#)