

BB-9SGM

DB9 Male Low-profile Gender Changer



Features

- Convert a device's DB9 female port to a DB9 male port
- Extend cabling run by connecting two DB9 cables
- Convenient, inexpensive in-the-field adaption tool
- Features two DB9 male connectors
- Slim 1.9 cm thickness easily fits in tight spaces
- Gold-plated contacts for high reliability

Introduction

The versatile Model BB-9SGM gender reverser quickly and easily changes a port gender or joins two cables together. Save the cost of buying a new cable by changing the port gender and using a cable you already have. Quickly join two like cables together to extend a cable run.

The gender changer is molded and fully shielded, preventing EMI/RFI interference from office equipment.

Small, low-profile size saves space in installations – and in your toolbox. Keep a few on hand for field service calls.


Ordering Information

Model No.	Description
BB-9SGM	DB9 Male Low-profile Gender Changer

Connector Pin-outs

DB9 Male	DB9 Male
1	1
2	2
~	
8	8
9	9
GND	GND

Dimensions

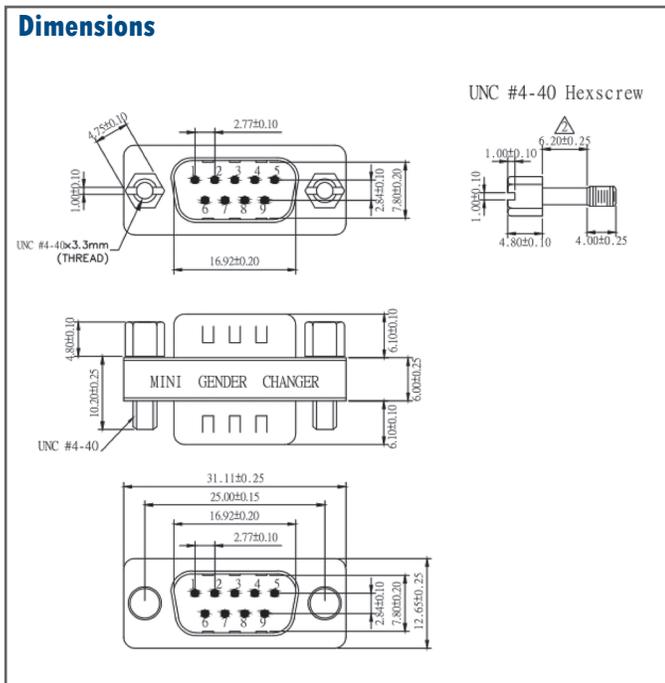

Specifications

Connector 1	DB9 male
Connector 2	DB9 male
Contact Plating	Gold plated over nickel
Contact	Brass
Housing Material	Tin-plated shell
Insulator	PBT glass fiber reinforced (blue face)
Dimensions	31.1 x 12.7 x 17.6 mm
Compliances	RoHS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Adapters & Gender Changers category:

Click to view products by B&B Electronics manufacturer:

Other Similar products are found below :

[243A10120X](#) [243A11070X](#) [243A13290X](#) [243A13460X](#) [300X10729X](#) [300X10759X](#) [GCHDLP26F26F](#) [30-9532P](#) [40-9586FP](#) [500-135](#) [40-9526HDMP](#) [56F715-003](#) [243A11800X](#) [243A10560X](#) [40-9526HDSP](#) [243A11060X](#) [56-745-005](#) [243A10580X](#) [56-725-001](#) [SC485](#) [173114-0088](#) [173114-0099](#) [76000670](#) [76000700](#) [NADB9MF](#) [2902323](#) [2902326](#) [40-9538F](#) [163A50049X](#) [NADB15FF-B](#) [NADB9FF-B](#) [243A10030X](#) [76000671](#) [163A50029X](#) [16-501373](#) [FCC17-A15AD-280](#) [FCC17-E09AD-210](#) [FCE17-A15AD-250](#) [FCE17-B25AD-210](#) [FCE17-B25AD-250](#) [FCE17B25AD290](#) [FCE17-E09AD-210](#) [FCE5709500430](#) [2310387](#) [GCHDLP44M44M](#) [GCLP25M25F](#) [FCC17A15AD2E0](#) [FCC17C37AD280](#) [FCC17-E09AD-280](#) [FCC17E09AD293](#)