



DASH NO	FIG	CABLES ACCOMMODATED	A DIM	B HEX	C HEX	D HEX	E DIM	F DIA	ASSEMBLE PER
-1	1,3	RG-58, 142, 400	1.000	.625	.437	.687	.221	.510	
-U1		ESSEX 621-715							
-2		RG-59							
-U2		BELDEN 8279							
-2A									
-2B		W.E.CO. 730A							
-U2B									
-3		RG-223							
-U3		RG-55							
-3A									
-U3A		RG-122							
-4		BELDEN 8218							
-U4		RG-174							
-5		RG-187							
-U5		RG-196							
-5A		HEWLETT-PACKARD 8120-1107							
-U5A									
-5B	1	BELDEN 9231	1.030	.750	.500	.750	.284	.635	TAI-101
-U6		RG-5							
-6E		RG-6							
-U6E									
-21	1,3	RG-303, RG-141	1.000	.625	.437	.687	.221	.510	
-U21		RG-180							
-22		GRUMMAN GC875GP1							
-U22		RG-187 DBL SHLD							
-31		BELDEN 8228							
-U31		275-3991 MICRODOT							
-34		616-569 AMPEX							
-U34		810 RAYCHEM							
-36		RG-304							
-U36		9248 BELDEN							
-37		BRAND-REX 8749							
-U37		GORE C06C032							
-41	1	88281 BELDEN	1.030	.750	.500	.750	.284	.635	
-U41		89120 BELDEN							
-44		89555 BELDEN							
-U44		734A, AT&T							
-51	1,3	RG-405	1.000	.625	.437	.687	.221	.510	
-U51		RG-402							
-52	2	RG-405	1.000	.625	.437	.687	.221	.510	TAI-130
-U52		RG-402							
-53									
-U53									
-63									
-U63									
-086									
-U086									
-141									
-U141									

FIG 1
-1 SHOWN

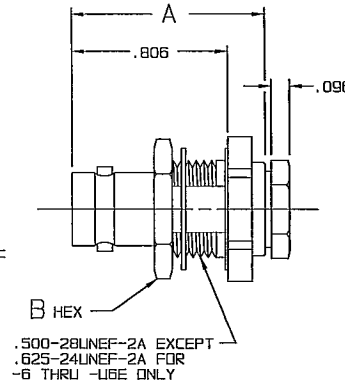

RED INDICATES ORIGINAL

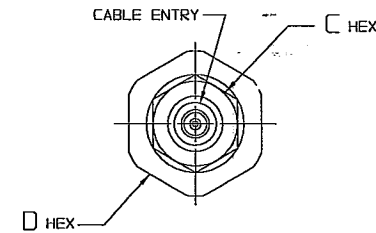

INCH	MM
.005	0.13
.096	2.44
.125	3.18
.218	5.54
.221	5.61
.250	6.35
.281	7.14
.284	7.21
.312	7.92
.437	11.10
.500	12.70
.505	12.83
.510	12.95
.625	15.88
.630	16.00
.635	16.13
.687	17.45
.750	19.05
.806	20.47
1.000	25.40
1.030	26.16
1.406	35.71
1.846	46.89

FIG 2
-086 SHOWN





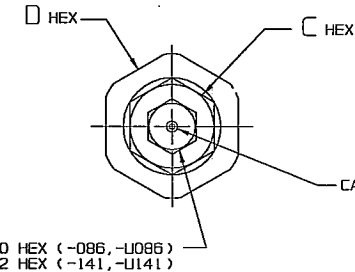


FIG 3
-1 SHOWN

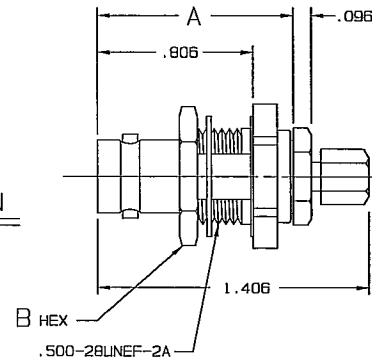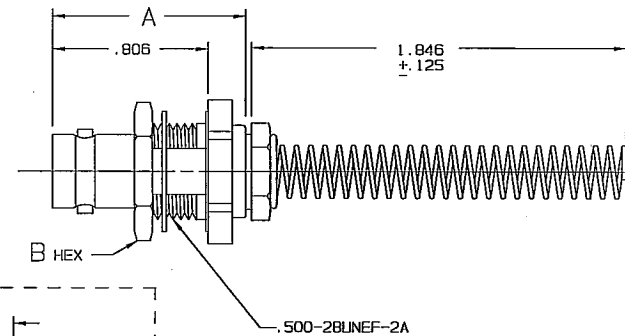

IF BEND RELIEF SPRING REQUIRED (FIG 3)
ADD SUFFIX "BR" TO MODEL NO (NOT AVAILABLE WITH
CABLE GROUPS -6, -U6, -6E, -U6E, -51, -U51, -52, -U52
-63, -U63, -086, -U086, -141 & -U141)

5. FEMALE TYPE BNC COAXIAL BULKHEAD JACKS, BOTH 50 & 75 OHM VERSIONS
4. MAX PANEL THK .218
3. DASH NO DENOTES CABLE GROUP EXCEPT "U" PREFIX DENOTES 75 OHM VERSION
2. FINISH: TFS-1A (NICKEL)
1. ALL DIM ARE IN INCHES



QTY	DESCRIPTION	PART NUMBER	ITEM
155-0347	TOL UNLESS SPECIFIED		
155-0338	.xx ± .005		
155-0297	.xxx ± .005		
155-0280	ANGLES ±		
105-1016	DWN L.M. 10-5-08		
105-1004	CHK 92 10-6-86		
105-0158	ENGR		
110-0003	APPR		
105-0717	NEXT ASSY		

TROMPETER ELECTRONICS, INC.		PART NUMBER		ITEM
		8J29/UBJ29	8J29BR/UBJ29BR	
DRAWING NO.	14949	DRAWING NO.	1-0126	REV U
SCALE 2/1	DATE 12/31/88	SHEET 1 OF 2		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) ***category:***

Click to view products by [Bel Fuse](#) ***manufacturer:***

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [980-8666-005](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#)