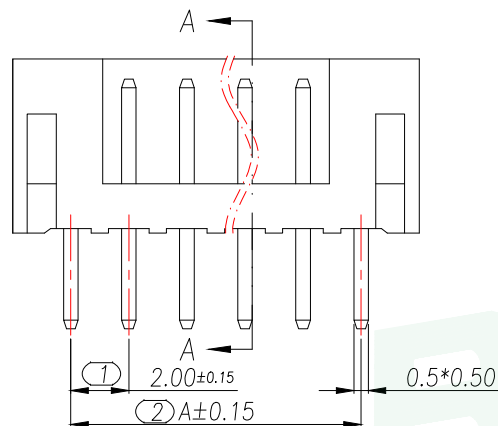
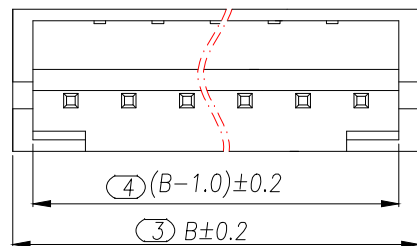


SECTION A-A

REV.	DESCRIPTION	ECN NO.	NAME	DATE

Part No	PIN	A	B
WF-1A200A2P	2	2	6
WF-1A200A3P	3	4	8
WF-1A200A4P	4	6	10
WF-1A200A5P	5	8	12
WF-1A200A6P	6	10	14
WF-1A200A7P	7	12	16
WF-1A200A8P	8	14	18
WF-1A200A9P	9	16	20
WF-1A200A10P	10	18	22
WF-1A200A11P	11	20	24
WF-1A200A12P	12	22	26
WF-1A200A13P	13	24	28
.....	...	...	...
WF-1A200A20P	20	$(20-1)*2$	$(20+1)*$

PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

技术要求:

1、塑件材料:PA66 (UL-94V-0)

2. 接触件: 黄铜镀锡

3、接触电阻： $\leq 10m\Omega$

4、绝缘电阻： $\geq 1000M\Omega$

5、额定电压:250V AC DC

6、额定电流:2.0A AC DC

7、耐压:能承受1000V AC/Minute


8、工作温度： $-25^{\circ}\sim+85^{\circ}$

9、可焊性试验:浸锡面积 $\geq 9.5\%$ 温度 220^{+5}_{-5} 时间

 2.5 ± 0.5 秒

10、铅和镉等六大有害物质含量要符合环保要求

2	Contact	Brass	n*1	电镀(锡): 整个表面镀底镍30u"MIN,再镀锡80u".MIN.
1	Wafer	PA66(UL94V-0)	1	本色
序号	名 称	材 料	数 量	附 注

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD						
DIM. TOL. X X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°		TITLE: <i>WAFER 2.0mm H6.0mm 180° DIP</i>						
		DWG. NO.: <i>WF-1A200ANP</i>			DRAWN: MAX			
		PART NO.: <i>WF-1A200ANP</i>			CHECKED: ELLA			
		UNIT: mm	SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [BXCONN](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)