

Wire Wound Type Common Mode Filter

CND-tek


磁联达



- 1.High common mode impedance at high frequency cause excellent noise suppression performance.
- 2.HSF1210F2SF series realizes small size and low profile. 1.2x1.0x0.9 mm.
- 3.100% Lead(Pb) & Halogen-Free and RoHS compliant.
- 4.Excellent for USB3.0


Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)	Rated Volt. (Vdc)	Withstand Volt. (Vdc)	IR (Ω) min.
HSF1210F2SF-900T02-1	$90 \pm 25\%$	100	0.40	200	50	125	10M

MECHANICAL

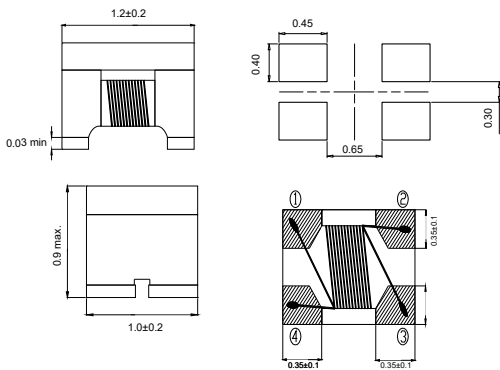


Dimension: mm


SCHEMATICS



IMPEDEANCE FREQUENCY




TAPING AND PACKING

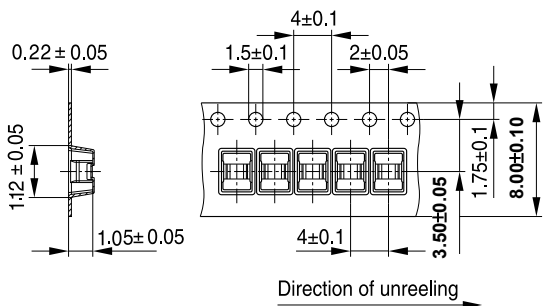

IND1752-J-E

Reel

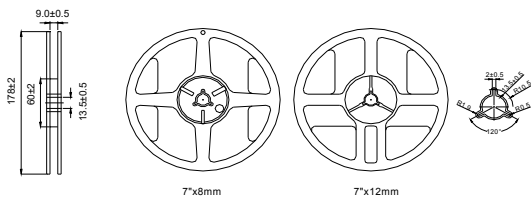

Dimensions in mm

Quantity (pcs):
3000 PCS PER REEL
5 REELS PER CARTON
15000PCS PER CARTON

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) ***category:***

Click to view products by [CND-tek](#) ***manufacturer:***

Other Similar products are found below :

[PE-64683](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [UAL21VR0802000](#) [UALSC023000000](#)
[UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#)
[PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PE-67531](#) [2752041447](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#)
[FE2X10-4-2NL](#) [T8003NLT](#) [CTX66-19521-R](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#) [4534-3](#)
[PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.104NLT](#) [B82723A2102N001](#) [CUW43T-513T-AU](#) [CUW43T-104T-AU](#) [SCM9250-400N](#)
[SCM9250-510N](#) [FA010G00](#) [GA021G00](#) [GA030G00](#) [MA020G00](#) [QA021G00](#) [APPM00070638301XY0](#) [APPM00070638501XY0](#)
[AWCU00321619222M02](#) [FA040G00](#) [PAC6034.205NLT](#)