


CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

BNC POCKET REFERENCE OSCILLATOR



**New BNC
PRO Series**

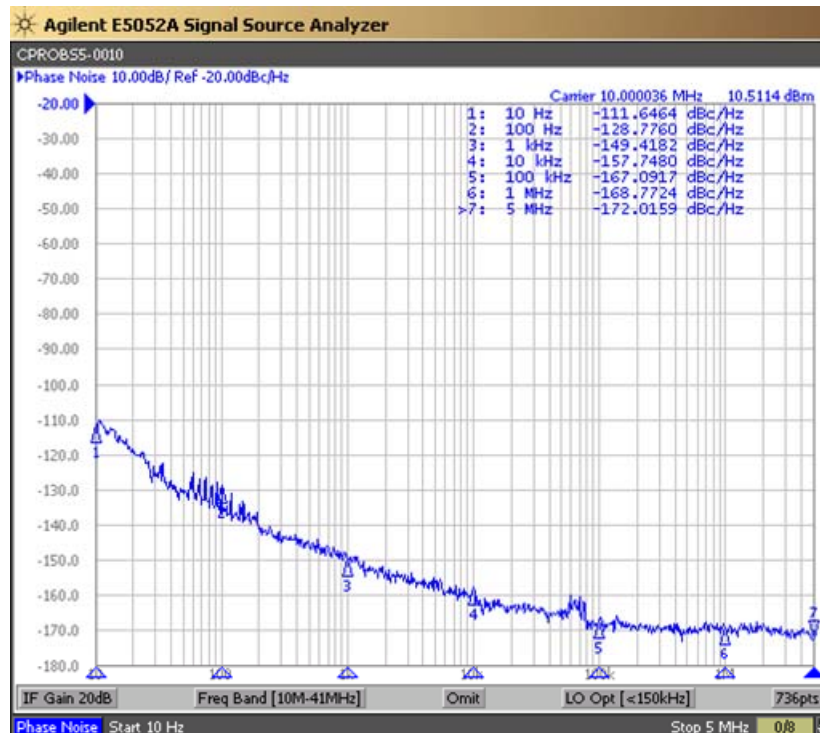

Crystek has expanded its Pocket Reference Oscillator family to now include a BNC version. The larger package allows Crystek to offer its higher performance CLOCK oscillators in the BNC housing. The family will be offered from 10 MHz to 1090 MHz in single frequencies. Output waveforms include Sinewave and HCMOS. Supply voltages will be +3.3V or +5.0V.

Product Control:

Crystek Part Number:	CPROBS5-0010	Release Date:	05-Feb-2019
Revision Level:	B	Responsible:	C. Vales

Page 1 of 2



CRYSTEK
CORPORATION


12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM



Model CPROBS5-0010

BNC PRO, 5V, Sinewave Clock

Frequency:	10.000 MHz
Frequency Stability:	±25 ppm
Temperature Range:	0°C to +70°C
Storage Temperature:	-40°C to +85°C
Input Voltage:	5.0V ± 0.25V
Input Current:	30mA Max
Output Power:	True sinewave, +8 dBm Min, +10 dBm Typical
Second Harmonic:	-25 dBc Max
Sub-Harmonics:	None
Typical Phase Noise:	See Plot on page 1
Frequency Aging:	<3ppm 1 st year, <1ppm every year thereafter

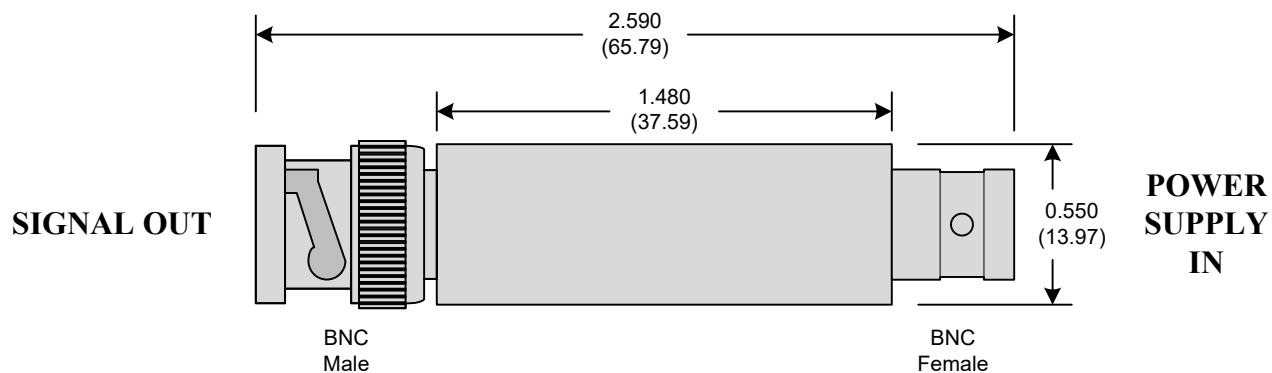

Product Control:

Crystek Part Number:	CPROBS5-0010	Release Date:	05-Feb-2019
Revision Level:	B	Responsible:	C. Vales

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice.
No liability is assumed as a result of its use or application.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) *category:*

Click to view products by [Crystek](#) *manufacturer:*

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#)
[601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#)
[8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#)
[ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#)
[9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#)
[3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-25.000000X](#)