

1-Mbit (128 K × 8) Static RAM

Features

- Temperature Ranges
 □ Industrial: -40 °C to 85 °C
 □ Automotive-A: -40 °C to 85 °C
- Pin and Function compatible with CY7C1019BV33
- High Speed
 □ t_{AA} = 10 ns
- CMOS for optimum Speed and Power
- Data Retention at 2.0 V
- Center Power/Ground Pinout
- Automatic Power Down when deselected
- Easy Memory Expansion with CE and OE Options
- Available in Pb-free 32-pin TSOP II package

Functional Description

The CY7C1019CV33 is a high performance CMOS static RAM organized as 131,072 words by 8 bits. Easy memory expansion is provided by an active LOW Chip Enable (CE), an active LOW Output Enable (OE), and tristate drivers. This device has an automatic power down feature that significantly reduces power consumption when deselected.


Writing to the device is accomplished by taking Chip Enable (\overline{CE}) and Write Enable (\overline{WE}) inputs LOW. Data on the eight I/O pins $(I/O_0$ through $I/O_7)$ is then written into the location specified on the address pins $(A_0$ through A_{16}).

Reading from the device is accomplished by taking Chip Enable (\overline{CE}) and Output Enable (\overline{OE}) LOW while forcing Write Enable (\overline{WE}) HIGH. Under these conditions, the contents of the memory location specified by the address pins will appear on the I/O pins.

The eight input/output pins (I/O₀ through I/O₇) are <u>placed</u> in a high impedance state whe<u>n</u> the device is deselected (CE HIGH), the outputs are <u>disabled</u> (\overline{OE} HIGH), or during a write operation (\overline{CE} LOW, and \overline{WE} LOW).

For a complete list of related documentation, click here.

Logic Block Diagram

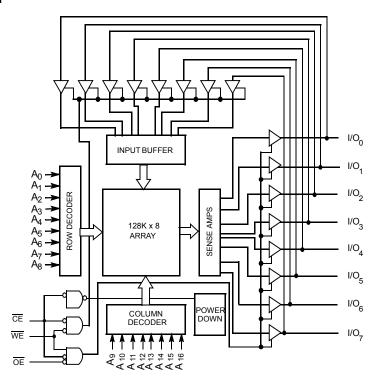



Contents

Selection Guide	3
Pin Configuration	3
Maximum Ratings	4
Operating Range	4
Electrical Characteristics	4
Capacitance	5
Thermal Resistance	5
AC Test Loads and Waveforms	5
Switching Characteristics	
Switching Waveforms	
Truth Table	
Ordering Information	
Ordering Code Definitions	

Package Diagram	10
Acronyms	11
Document Conventions	11
Units of Measure	11
Document History Page	12
Sales, Solutions, and Legal Information	14
Worldwide Sales and Design Support	14
Products	14
PSoC® Solutions	14
Cypress Developer Community	14
Technical Support	14




Selection Guide

Description	-10 (Industrial/ Automotive-A)	Unit
Maximum Access Time	10	ns
Maximum Operating Current	80	mA
Maximum Standby Current	5	mA

Pin Configuration

Figure 1. 32-pin TSOP II pinout (Top View) [1]



Note

NC pins are not connected on the die.



Maximum Ratings

Exceeding maximum ratings may impair the useful life of the device. These user guidelines are not tested.

Current into Outputs (LOW)	20 mA
Static Discharge Voltage	
(per MIL-STD-883, Method 3015)	>2001 V
Latch up Current	>200 mA

Operating Range

Range	Ambient Temperature	V _{cc}
Commercial	0 °C to +70 °C	3.3 V ± 10%
Industrial	–40 °C to +85 °C	3.3 V ± 10%
Automotive-A	–40 °C to +85 °C	3.3 V ± 10%

Electrical Characteristics

Over the Operating Range

Parameter	Description	Test Conditions	-10 (Indust	-10 (Industrial/Auto-A)	
Parameter	Description	rest Conditions	Min	Max	Unit
V _{OH}	Output HIGH Voltage	V _{CC} = Min, I _{OH} = -4.0 mA	2.4	_	V
V _{OL}	Output LOW Voltage	V _{CC} = Min, I _{OL} = 8.0 mA	_	0.4	V
V _{IH}	Input HIGH Voltage		2.0	V _{CC} + 0.3	V
V _{IL}	Input LOW Voltage ^[2]		-0.3	0.8	V
I _{IX}	Input Leakage Current	$GND \leq V_{I} \leq V_{CC}$	-1	+1	μΑ
I _{OZ}	Output Leakage Current	$GND \le V_1 \le V_{CC}$, Output Disabled	-1	+1	μА
I _{CC}	V _{CC} Operating Supply Current	$V_{CC} = Max$, $I_{OUT} = 0$ mA, $f = f_{MAX} = 1/t_{RC}$	_	80	mA
I _{SB1}	Automatic CE Power down Current – TTL Inputs	$\begin{aligned} &\text{Max V}_{CC}, \overline{CE} \geq \text{V}_{IH}, \\ &\text{V}_{IN} \geq \text{V}_{IH} \text{ or V}_{IN} \leq \text{V}_{IL}, f = \text{f}_{MAX} \end{aligned}$	_	15	mA
I _{SB2}	Automatic CE Power down Current – CMOS Inputs	$\begin{aligned} &\text{Max V}_{\text{CC}}, \ \overline{\text{CE}} \geq \text{V}_{\text{CC}} - 0.3 \text{ V,} \\ &\text{V}_{\text{IN}} \geq \text{V}_{\text{CC}} - 0.3 \text{ V, or V}_{\text{IN}} \leq 0.3 \text{ V, f} = 0 \end{aligned}$	-	5	mA

Note

Document Number: 38-05130 Rev. *O

^{2.} $V_{\rm IL}$ (min.) = -2.0 V for pulse durations of less than 20 ns.



Capacitance


Parameter [3]	Description	Test Conditions	Max	Unit
C _{IN}	Input capacitance	$T_A = 25 ^{\circ}\text{C}, f = 1 \text{MHz}, V_{CC} = 5.0 \text{V}$	8	pF
C _{OUT}	Output capacitance		8	pF

Thermal Resistance

Parameter [3]	Description	Test Conditions	32-pin TSOP II	Unit
Θ_{JA}	Thermal resistance (junction to ambient)	Still air, soldered on a 3 × 4.5 inch, four-layer printed circuit board	68.61	°C/W
$\Theta_{\sf JC}$	Thermal resistance (junction to case)		20.59	°C/W

AC Test Loads and Waveforms

Figure 2. AC Test Loads and Waveforms [4]

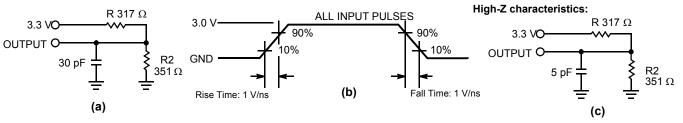

<sup>Notes
3. Tested initially and after any design or process changes that may affect these parameters.
4. AC characteristics (except High Z) for all speeds are tested using the Thevenin load shown in section (a) in Figure 2. High Z characteristics are tested for all speeds using the test load shown in section (c) in Figure 2.</sup>



Switching Characteristics

Over the Operating Range

Parameter [5]	Description	-10 (Industrial/ Automotive-A)		Unit
	·	Min	Max	
Read Cycle				
t _{RC}	Read Cycle Time	10	_	ns
t _{AA}	Address to Data Valid	_	10	ns
t _{OHA}	Data Hold from Address Change	3	_	ns
t _{ACE}	CE LOW to Data Valid	_	10	ns
t _{DOE}	OE LOW to Data Valid	_	5	ns
t _{LZOE}	OE LOW to Low Z ^[6]	0	_	ns
t _{HZOE}	OE HIGH to High Z [6, 7]	_	5	ns
t _{LZCE}	CE LOW to Low Z ^[6]	3	_	ns
t _{HZCE}	CE HIGH to High Z [6, 7]	_	5	ns
t _{PU} ^[8]	CE LOW to Power Up	0	_	ns
t _{PD} ^[8]	CE HIGH to Power Down	_	10	ns
Write Cycle [9,	10]			
t _{WC}	Write Cycle Time	10	_	ns
t _{SCE}	CE LOW to Write End	8	_	ns
t _{AW}	Address Setup to Write End	8	_	ns
t _{HA}	Address Hold from Write End	0	_	ns
t _{SA}	Address Setup to Write Start	0	_	ns
t _{PWE}	WE Pulse Width	7	_	ns
t _{SD}	Data Setup to Write End		_	ns
t _{HD}	Data Hold from Write End		_	ns
t _{LZWE}	WE HIGH to Low Z [6]	3	_	ns
t _{HZWE}	WE LOW to High Z [6, 7]	_	5	ns

Notes

Test conditions assume signal transition time of 3 ns or less, timing reference levels of 1.5 V, input pulse levels of 0 to 3.0 V.
 At any given temperature and voltage condition, t_{HZCE} is less than t_{LZCE}, t_{HZOE} is less than t_{LZNE} and t_{HZWE} is less than t_{LZWE} for any given device.
 t_{HZOE}, t_{HZCE}, and t_{HZWE} are specified with a load capacitance of 5 pF as in part (d) of Figure 2 on page 5. Transition is measured ±500 mV from steady-state voltage.
 This parameter is guaranteed by design and is not tested.
 The internal write time of the memory is defined by the overlap of CE LOW and WE LOW. CE and WE must be LOW to initiate a write, and the transition of any of these signals can terminate the write. The input data setup and hold timing should be referenced to the leading edge of the signal that terminates the write.

^{10.} The minimum write cycle time for Write Cycle No. 3 (WE Controlled, OE LOW) should be equal to the sum of t



Switching Waveforms

Figure 3. Read Cycle No. 1 [11, 12]

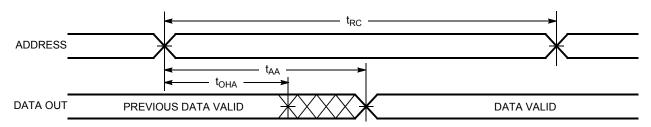


Figure 4. Read Cycle No. 2 (OE Controlled) [12, 13]


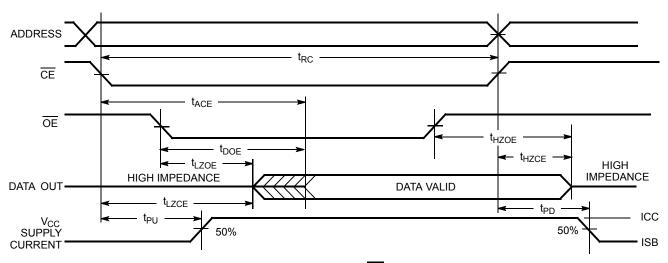


Figure 5. Write Cycle No. 1 (CE Controlled) [14, 15]

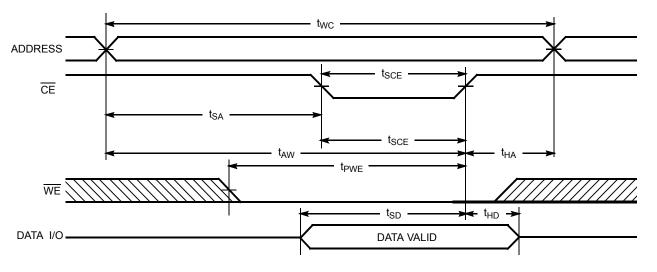

Notes

- Notes

 11. <u>Dev</u>ice is continuously selected. OE, CE = V_{IL}.

 12. WE is HIGH for read cycle.

 13. Address valid prior to or coinc<u>ide</u>nt with CE transition LOW.

 14. Data I/O is high impedance if OE = V_{IL}.

 15. If CE goes HIGH simultaneously with WE going HIGH, the output remains in a high impedance state.



Switching Waveforms (continued)

Figure 6. Write Cycle No. 2 (WE Controlled, OE HIGH During Write) [16, 17]


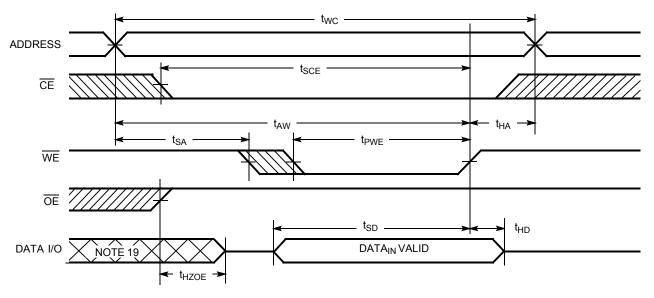


Figure 7. Write Cycle No. 3 (WE Controlled, OE LOW) [17, 18]

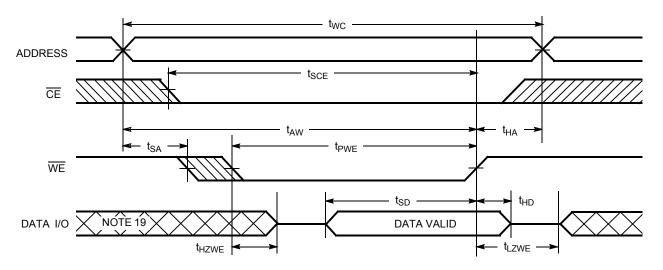

Notes

^{16.} Data I/O is high impedance if $\overline{OE} = V_{|H-}$ 17. If \overline{CE} goes HIGH simultaneously with WE going HIGH, the output remains in a high impedance state.
18. The minimum write cycle pulse width should be equal to the sum of tsp and thzwe.

^{19.} During this period the I/Os are in the output state and input signals should not be applied.




Truth Table

CE	OE	WE	I/O ₀ –I/O ₇	Mode	Power
Н	Χ	Χ	High Z	Power Down	Standby (I _{SB})
L	L	Н	Data Out	Read	Active (I _{CC})
L	Χ	L	Data In	Write	Active (I _{CC})
L	Н	Н	High Z	Selected, Outputs Disabled	Active (I _{CC})

Ordering Information

Speed (ns)	Ordering Code	Package Diagram	Package Type	Operating Range
10	CY7C1019CV33-10ZXA	51-85095	32-pin TSOP II (Pb-free)	Automotive-A
	CY7C1019CV33-10ZXAT	51-85095	32-pin TSOP II (Pb-free)	


Ordering Code Definitions

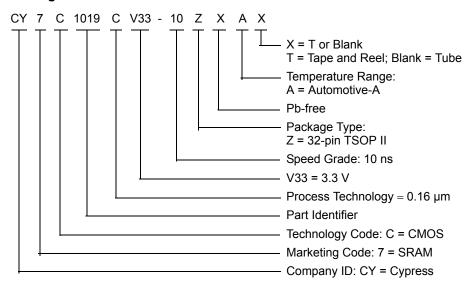



Package Diagram

Figure 8. 32-pin TSOP II (20.95 × 11.76 × 1.0 mm) ZS32 Package Outline, 51-85095

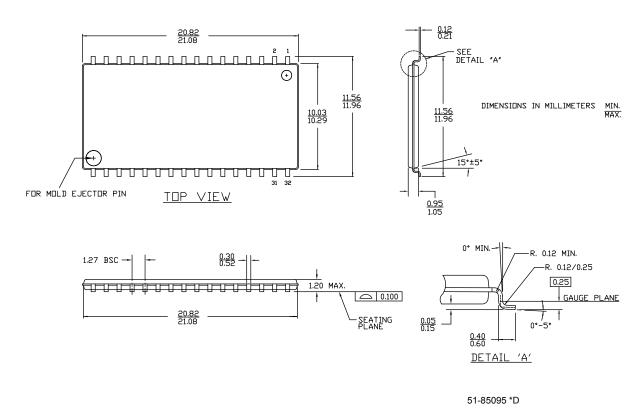



Acronyms

Acronym	Description				
CMOS	Complementary Metal Oxide Semiconductor				
CE	Chip Enable				
I/O	Input/Output				
OE	Output Enable				
SRAM	Static Random Access Memory				
TSOP	Thin Small Outline Package				
TTL	Transistor-Transistor Logic				
WE	Write Enable				

Document Conventions

Units of Measure

Symbol	Unit of Measure				
°C	degree Celsius				
MHz	megahertz				
μΑ	microampere				
mA	milliampere				
mm	millimeter				
ms	millisecond				
ns	nanosecond				
%	percent				
pF	picofarad				
V	volt				
W	watt				



Document History Page

	t Number: 38		<u> </u>	
Rev.	ECN No.	Submission Date	Orig. of Change	Description of Change
**	109245	12/16/01	HGK	New data sheet.
*A	113431	04/10/02	NSL	Updated AC Test Loads and Waveforms: AC Test Loads split based on speed.
*B	115047	08/01/02	HGK	Added TSOP II Package related information in all instances across the document. Added Industrial Temperature related information in all instances across the document. Improved I _{CC} limits in all instances across the document.
*C	119796	10/11/02	DFP	Updated Selection Guide (Changed value of maximum standby current fro 5 nA to 5 mA).
*D	123030	12/17/02	DFP	Updated Truth Table (To reflect single Chip Enable option).
*E	419983	See ECN	NXR	Added 48-ball VFBGA Package related information in all instances across to document. Updated Ordering Information: Added lead-free parts. Replaced "Package Name" with "Package Diagram" in column heading ar updated details in the column.
*F	493543	See ECN	NXR	Removed 8 ns speed bin related information in all instances across the document. Updated Pin Configuration: Added Note 1 and referred the same note in Figure 1. Updated Electrical Characteristics: Changed the description of I _{IX} parameter from "Input Load Current" to "Input Leakage Current". Removed I _{OS} parameter and its details. Updated Ordering Information.
*G	2761448	09/09/2009	VKN	Added Automotive-A Temperature Range related information in all instance across the document.
*H	2897691	03/23/2010	RAME	Updated Ordering Information. Updated Package Diagram.
*1	3057593	10/13/2010	PRAS	Updated Ordering Information and added Ordering Code Definitions. Updated Package Diagram.
*J	3072834	11/11/2010	PRAS	Updated Ordering Information: Removed obsolete parts. Updated Package Diagram.
*K	3277371	06/08/2011	AJU	Updated Features. Updated Selection Guide (Removed -12 (Industrial) and -15 (Industrial) columns). Updated Electrical Characteristics (Removed -12 (Industrial) and -15 (Industrial) columns). Updated Switching Characteristics (Removed -12 (Industrial) and -15 (Industrial) columns). Updated Package Diagram. Updated to new template.
*L	4146968	10/04/2013	VINI	Updated to new template. Completing Sunset Review.



Document History Page (continued)

	Document Title: CY7C1019CV33, 1-Mbit (128 K × 8) Static RAM Document Number: 38-05130							
Rev.	ECN No.	Submission Date	Orig. of Change	Description of Change				
*M	4578508	11/24/2014	VINI	Updated Functional Description: Added "For a complete list of related documentation, click here." at the end. Updated Switching Characteristics: Added Note 10 and referred the same note in "Write Cycle". Updated Switching Waveforms: Added Note 18 and referred the same note in Figure 7.				
*N	4802185	06/18/2015	NILE	Updated Package Diagram: spec 51-85095 – Changed revision from *B to *D. Updated to new template.				
*0	5017466	11/17/2015	VINI	Added Thermal Resistance. Completing Sunset Review.				



Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

Products

Automotive Clocks & Buffers

Interface

Lighting & Power Control

Memory **PSoC**

Touch Sensing USB Controllers

cypress.com/go/interface cypress.com/go/powerpsoc cypress.com/go/memory cypress.com/go/psoc cypress.com/go/touch cypress.com/go/USB Wireless/RF cypress.com/go/wireless

cypress.com/go/automotive

cypress.com/go/clocks

PSoC® Solutions

psoc.cypress.com/solutions PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP

Cypress Developer Community

Community | Forums | Blogs | Video | Training

Technical Support

cypress.com/go/support

© Cypress Semiconductor Corporation, 2001-2015. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for SRAM category:

Click to view products by Cypress manufacturer:

Other Similar products are found below:

CY6116A-35DMB CY7C1049GN-10VXI CY7C128A-45DMB GS8161Z36DD-200I GS88237CB-200I RMLV0408EGSB-4S2#AA0

IDT70V5388S166BG IS64WV3216BLL-15CTLA3 IS66WVE4M16ECLL-70BLI PCF8570P K6F2008V2E-LF70000 K6T4008C1B-GB70

CY7C1353S-100AXC AS6C8016-55BIN AS7C164A-15PCN 515712X IDT71V67603S133BG IS62WV51216EBLL-45BLI

IS63WV1288DBLL-10HLI IS66WVE2M16ECLL-70BLI 70V639S10BCG IS66WVE4M16EALL-70BLI IS62WV6416DBLL-45BLI

IS61WV102416DBLL-10TLI CY7C1381KV33-100AXC CY7C1381KVE33-133AXI 8602501XA 5962-3829425MUA 5962-3829430MUA

5962-8855206YA 5962-8866201YA 5962-8866204TA 5962-8866206MA 5962-8866208UA 5962-8872502XA 5962-9062007MXA 5962-8871202XA 5962-8872501LA 5962-8866208YA 5962-8866205YA 5962-8866205UA 5962-8866203YA 5962-8855202YA